

DATA SHEET

TRANSIENT VOLTAGE SUPPRESSORS

AC/DC POWER SUPPLY

HF-S series

RoHS compliant & Halogen free




Product specification— July 05, 2023 V.1



Transient Voltage Suppressors (TVS) Data Sheet

Features

- Lead terminals
- High current transient suppressor
- Excellent clamping capability
- Glass passivated junction
- Bi-directional.
- Low slope resistance.
- Hazardous Substances Free.
- RoHS compliant
- High Temperature soldering: 265°C/10 seconds at terminals.




Maximum Ratings and Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Rating	Symbol	Value		Units
Current Rating	I_{PP}	HFA-S	3	KA
		HFB-S	6	
		HFC-S	10	
Operating junction and Storage Temperature Range.	T_J, T_{STG}	-40 to +125		°C

Dimensions

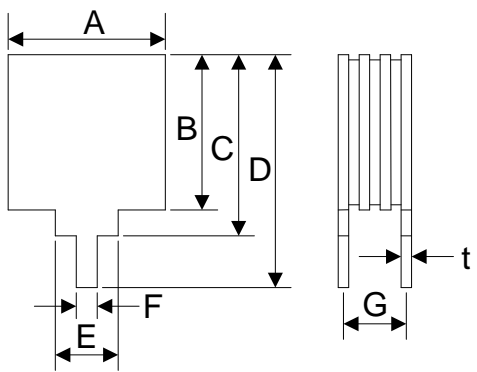	Symbol	Dimension	
		Inches	Millimeters
A	A	0.370±0.016	9.40±0.40
B	B	0.370±0.016	9.40±0.40
C	C	0.457±0.016	11.60±0.40
D	D	0.605±0.016	15.37±0.40
E	E	0.190±0.012	4.83±0.30
F	F	0.049±0.008	1.25±0.20
G	G	0.787max	20.00max
t	t	0.015±0.002	0.38±0.05

Note: Drawing here are for illustration only, actual assembly depends on specific part number.

Electrical Characteristics (T_A=25°C)

Part Number	Reverse Stand-Off Voltage		Breakdown Voltage	Test Current	Current Rating	Maximum Clamping Voltage	Reverse Leakage
	V _{AC} (V)	V _{DC} (V)	V _{BR} (V) MIN. @ I _T	I _T (mA)	Rated I _{PP} measured with 8/20μs	V _C (V) @ I _{PP}	I _R (μA) @ V _{DC}
HFA-012S	8.5	12.8	14	1	3KA	80	20
HFA-015S	11	15	17	1	3KA	85	20
HFA-020S	14	20	22	1	3KA	90	20
HFA-025S	17	25	28	1	3KA	95	20
HFA-030S	21	30	33	1	3KA	100	20
HFA-042S	30	42	47	1	3KA	105	20
HFA-058S	40	58	64	1	3KA	110	20
HFA-066S	45	66	70	1	3KA	120	20
HFA-076S	54	76	85	1	3KA	140	20
HFA-100S	72	100	110	1	3KA	165	20
HFA-133S	100	133	147	1	3KA	220	20
HFA-170S	130	170	180	1	3KA	260	20
HFA-190S	145	190	200	1	3KA	290	20
HFA-200S	150	200	222	1	3KA	330	20
HFA-240S	180	240	250	1	3KA	340	20
HFA-275S	210	275	300	1	3KA	435	20
HFA-300S	230	300	330	1	3KA	470	20
HFA-380S	275	380	401	1	3KA	520	20
HFA-430S	310	430	440	1	3KA	625	20
HFA-460S	330	460	500	1	3KA	770	20
HFA-500S	385	500	558	1	3KA	868	20
HFB-012S	8.5	12.8	14	1	6KA	80	20
HFB-015S	11	15	17	1	6KA	85	20
HFB-020S	14	20	22	1	6KA	90	20
HFB-025S	17	25	28	1	6KA	95	20
HFB-030S	21	30	33	1	6KA	100	20
HFB-042S	30	42	47	1	6KA	105	20
HFB-058S	40	58	64	1	6KA	110	20
HFB-066S	45	66	70	1	6KA	120	20
HFB-076S	54	76	85	1	6KA	140	20
HFB-100S	72	100	110	1	6KA	165	20
HFB-133S	100	133	147	1	6KA	220	20
HFB-170S	130	170	180	1	6KA	260	20

Part Number	Reverse Stand-Off Voltage		Breakdown Voltage	Test Current	Current Rating	Maximum Clamping Voltage	Reverse Leakage
	V _{AC} (V)	V _{DC} (V)	V _{BR} (V) MIN. @I _T	I _T (mA)	Rated I _{PP} measured with 8/20μs	V _C (V) @I _{PP}	I _R (μA) @V _{DC}
HFB-190S	145	190	200	1	6KA	290	20
HFB-200S	150	200	222	1	6KA	330	20
HFB-240S	180	240	250	1	6KA	340	20
HFB-275S	210	275	300	1	6KA	435	20
HFB-300S	230	300	330	1	6KA	470	20
HFB-380S	275	380	401	1	6KA	520	20
HFC-012S	8.5	12.8	14	1	10KA	80	20
HFC-015S	11	15	17	1	10KA	85	20
HFC-020S	14	20	22	1	10KA	90	20
HFC-025S	17	25	28	1	10KA	95	20
HFC-030S	21	30	33	1	10KA	100	20
HFC-042S	30	42	47	1	10KA	105	20
HFC-058S	40	58	64	1	10KA	110	20
HFC-066S	45	66	70	1	10KA	120	20
HFC-076S	54	76	85	1	10KA	140	20
HFC-100S	72	100	110	1	10KA	165	20
HFC-133S	100	133	147	1	10KA	220	20
HFC-170S	130	170	180	1	10KA	260	20
HFC-190S	145	190	200	1	10KA	290	20

Notes: 1. TA=25°C unless otherwise specified

2. Using 8/20μs wave shape pulses as defined in IEC61000-4-5

Ratings and Characteristic Curves ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Figure 1. Power Derating Curve



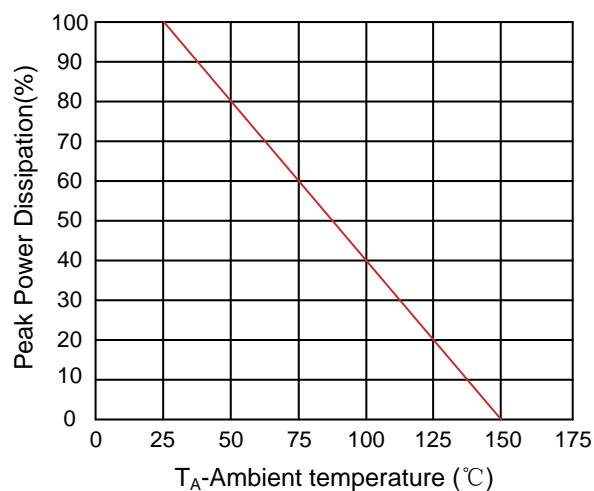


Figure 2. Pulse Waveform

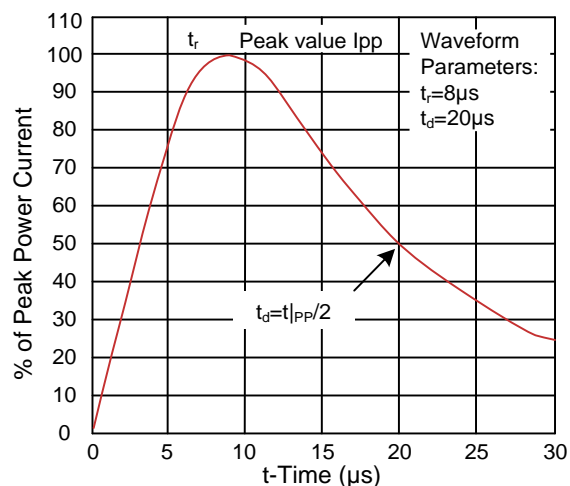

Recommended Soldering Conditions


Wave Soldering

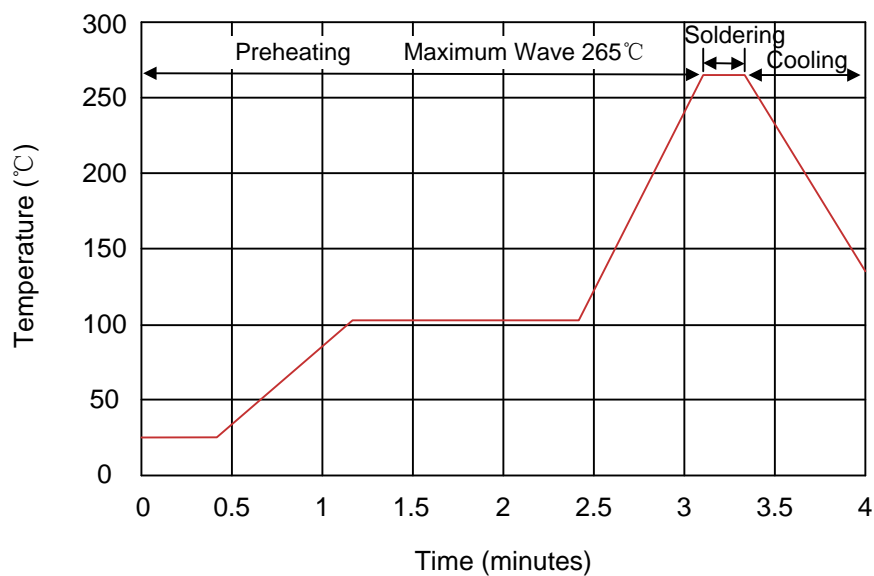



Recommended Conditions

Item	Conditions
Peak Temperature	265°C
Dipping Time	10 seconds
Soldering	1 time

Part Number Code

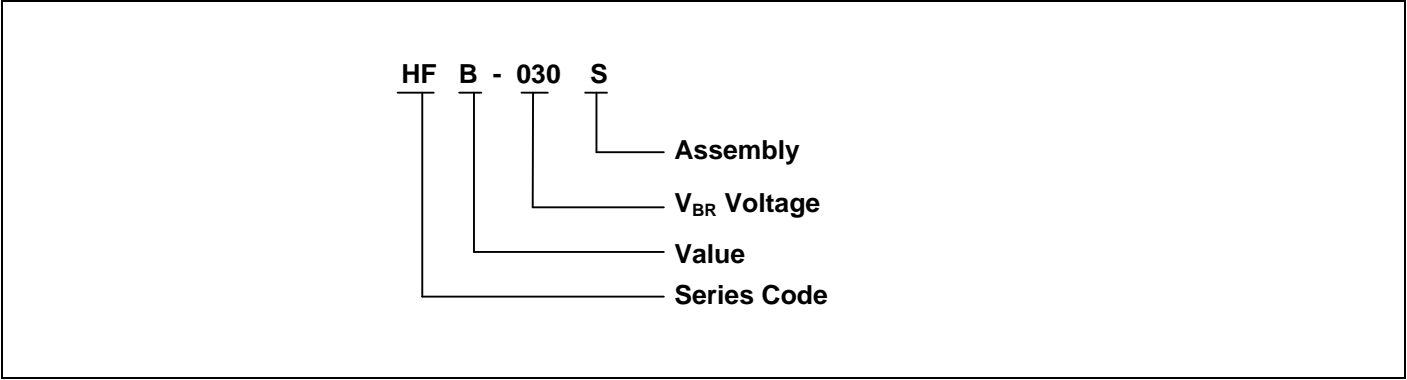

Packaging

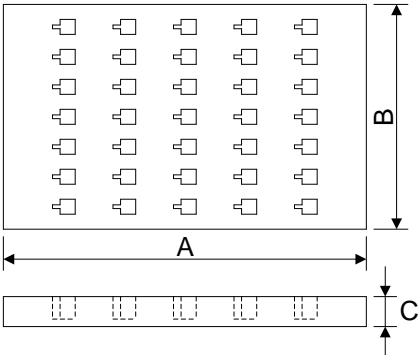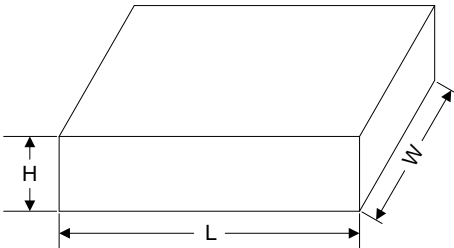Hole foam packing <div></div>	Symbol	Dimension (mm)
	A	238.0±1.0
	B	150.0±1.0
	C	20.0±1.0
	Quantity: 35PCS	
Inner Box <div></div>	L	250.0
	W	65.0
	H	165.0
	Quantity: 105PCS	

LEGAL DISCLAIMER

YAGEO, its distributors and agents (collectively, "YAGEO"), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. YAGEO may make changes, modifications and/or improvements to product related information at any time and without notice.

YAGEO makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, YAGEO disclaims (i) any and all liability arising out of the application or use of any YAGEO product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

YAGEO products are designed for general purpose applications under normal operation and usage conditions. Please contact YAGEO for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property: Aerospace equipment (artificial satellite, rocket, etc.), Atomic energy-related equipment, Aviation equipment, Disaster prevention equipment, crime prevention equipment, Electric heating apparatus, burning equipment, Highly public information network equipment, data-processing equipment, Medical devices, Military equipment, Power generation control equipment, Safety equipment, Traffic signal equipment, Transportation equipment and Undersea equipment, or for any other application or use in which the failure of YAGEO products could result in personal injury or death, or serious property damage. Particularly **YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.**

Information provided here is intended to indicate product specifications only. YAGEO reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by PCN.