



SPECIFICATION
 1. Rating : DC 30V 0.5A;
 2. Contact resistance: ≤50mΩ;
 3. Insulation resistance: ≥100MΩ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-25N;
 6. life test: 5,000 cycles.

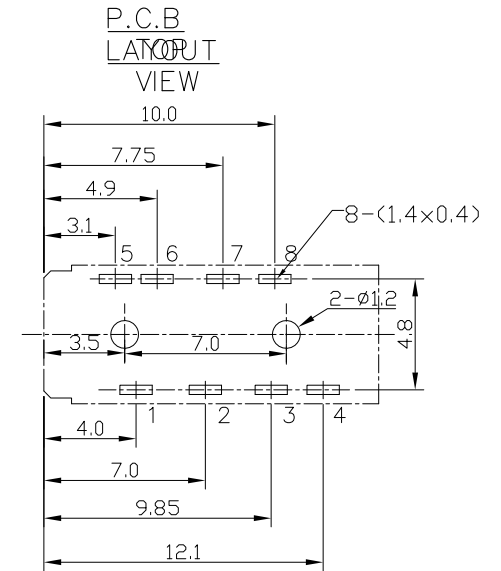

SCHMATIC

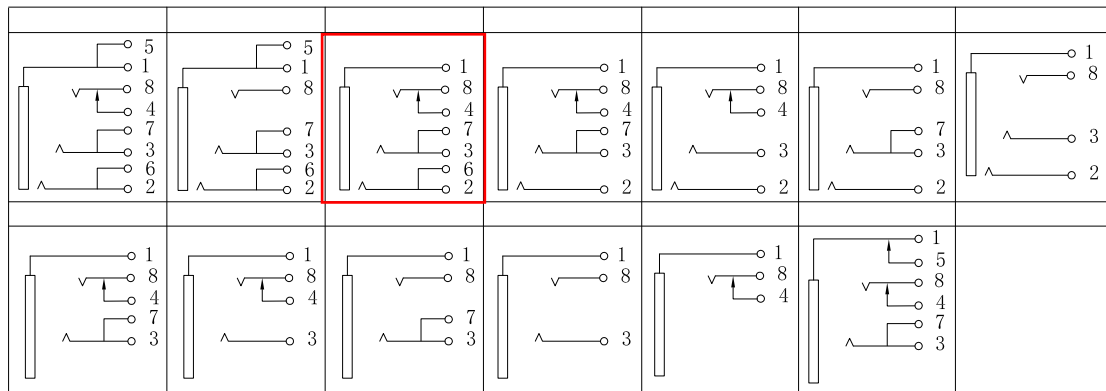

9	HOUSING	1	PPA	
8	2#CONTACT	1	BRONZE	Ag-Plating
7	1#CURVE PIECE	1	BRASS	Ag-Plating
6	1#CURVE PIECE	1	BRASS	Ag-Plating
5	2#CURVE PIECE	1	BRASS	Ag-Plating
4	1#CURVE PIECE	1	BRASS	Ag-Plating
3	1#CONTACT	1	BRONZE	Ag-Plating
2	1#CONTACT	1	BRONZE	Ag-Plating
1	1#CONTACT	1	BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	PHONE JACK	L-KLS1-SSJ3.5-005E	TOLERANCES	ANGLES SCALE VER
			±0.3	±2° 1:1 1

DESIGNER		NINGBO KLS ELECTRONIC CO; LTD
CHECK		
APPROVED		