

SPECIFICATIONS

Current Rating: 5A AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute

MATERIAL

Contact: Copper Alloy
 Insulator: PBT,UL94V-0

ORDER INFORMATION

5 W 2 5 2 5 I 0 - 1 X X T 0 G A L M 0 1

Pitch 2.50mm

1:Single Row







No. of contacts per row

T0: Tin Plated

G: Gray

A: Tray W/O Cap

RoHS

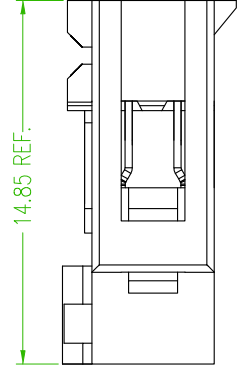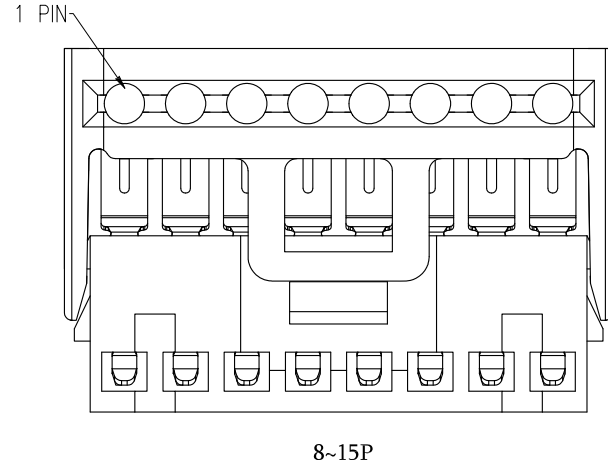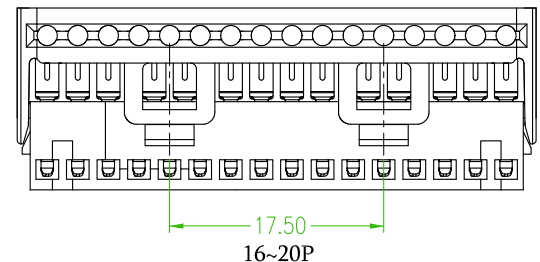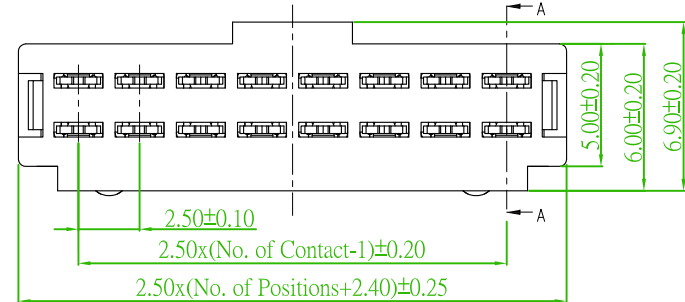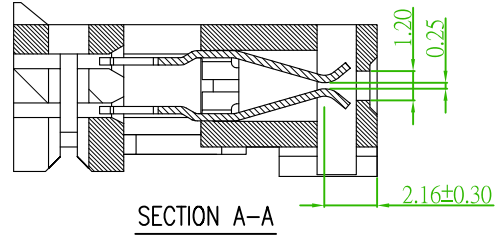

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	2.5mm WAFER IDC SOCKET TYPE				頁數 Page	1/1
品號 PART NO.	5W2525I0-1XXT0GALM01			繪圖 DRAWN	Eloise 2017/04/12	
圖號 DRAWING NO.	GW003-EL382	版本 REV.	A	核對 CHECKED	Jonny 2017/04/12	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2017/04/12	
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	.X±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	