

CM4-DUINO BASE BOARD

Specifications



CM4 SOCKET	suitable for all variants of Compute Module 4
CONNECTOR	M.2 M KEY slot, for connecting communication module or NVME SSD
	Arduino compatible GPIO header
USB	USB 2.0 Type A x 1
CAMERA	MIPI CSI-2 x 1 (15pin 1.0mm FPC connector)
VIDEO	HDMI x 1, supports 4K 30fps output
STORAGE	Micro SD card socket for Compute Module 4 Lite (without eMMC) variants
POWER INPUT	5V
DIMENSIONS	73.58 x 53.34mm

Connecting With Compute Module 4


Standard CM4 Socket, Suitable For All Variants Of Compute Module 4




Various Useful Interfaces

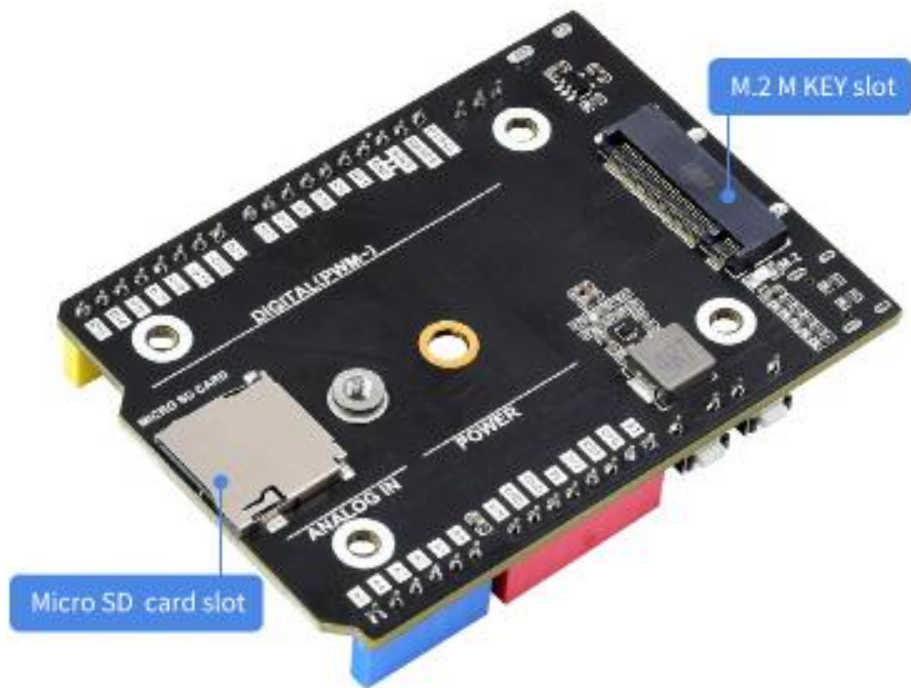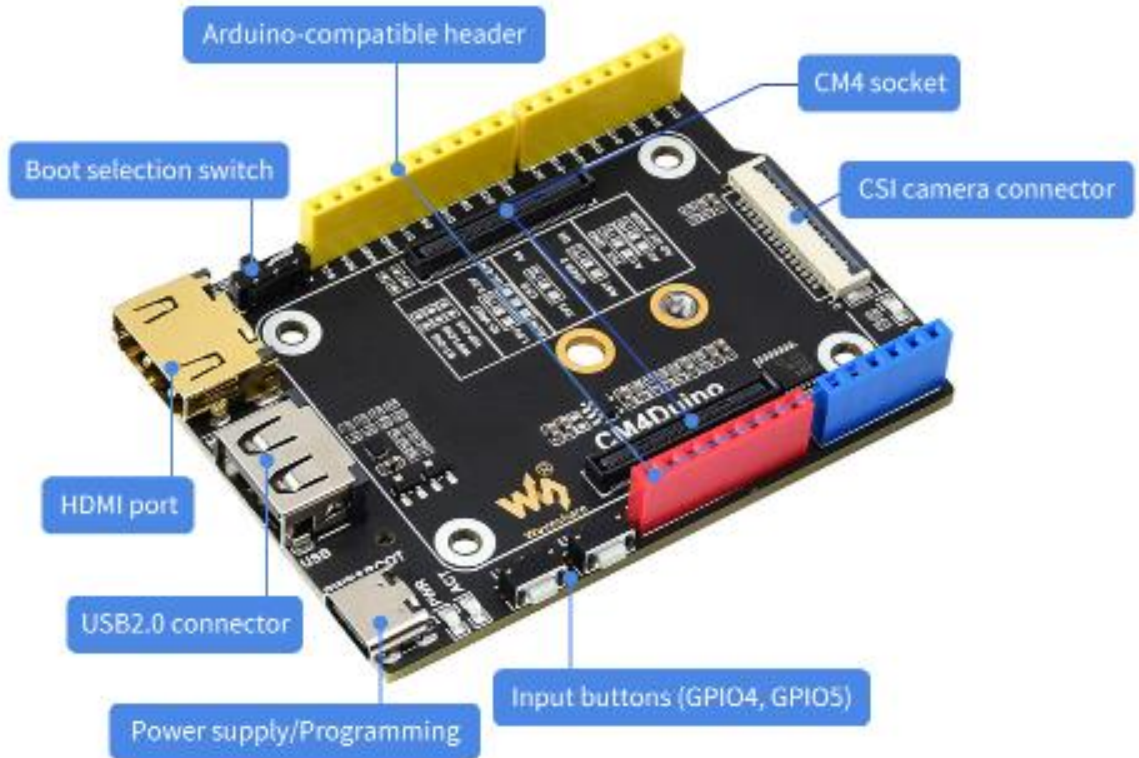

Pinout Definition

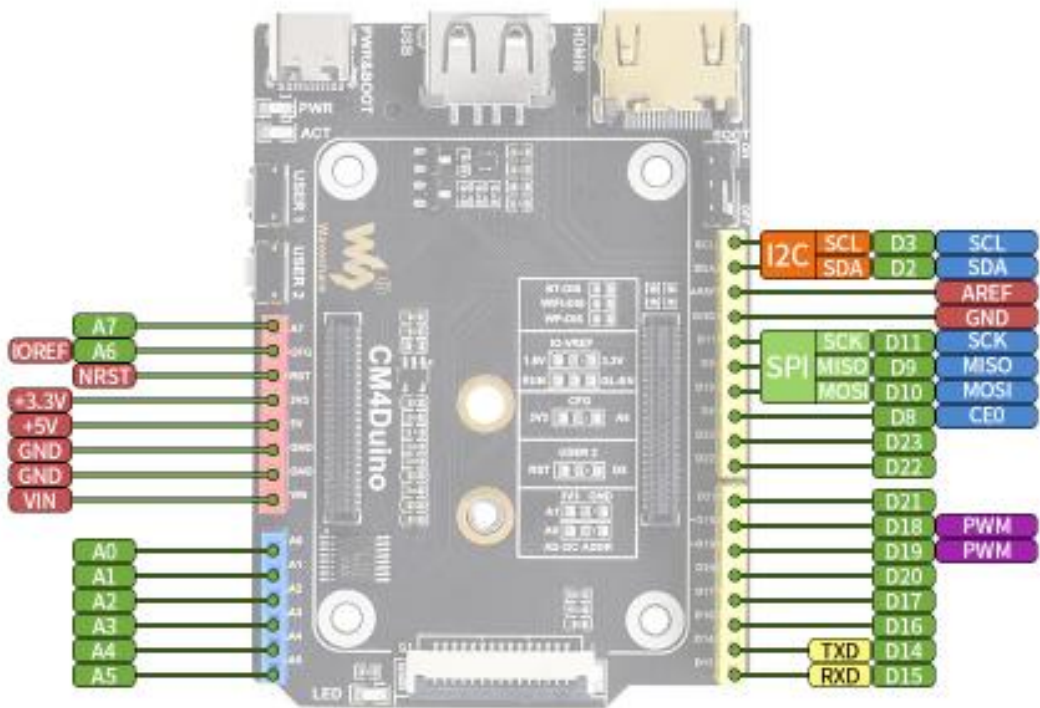

Outline Dimensions

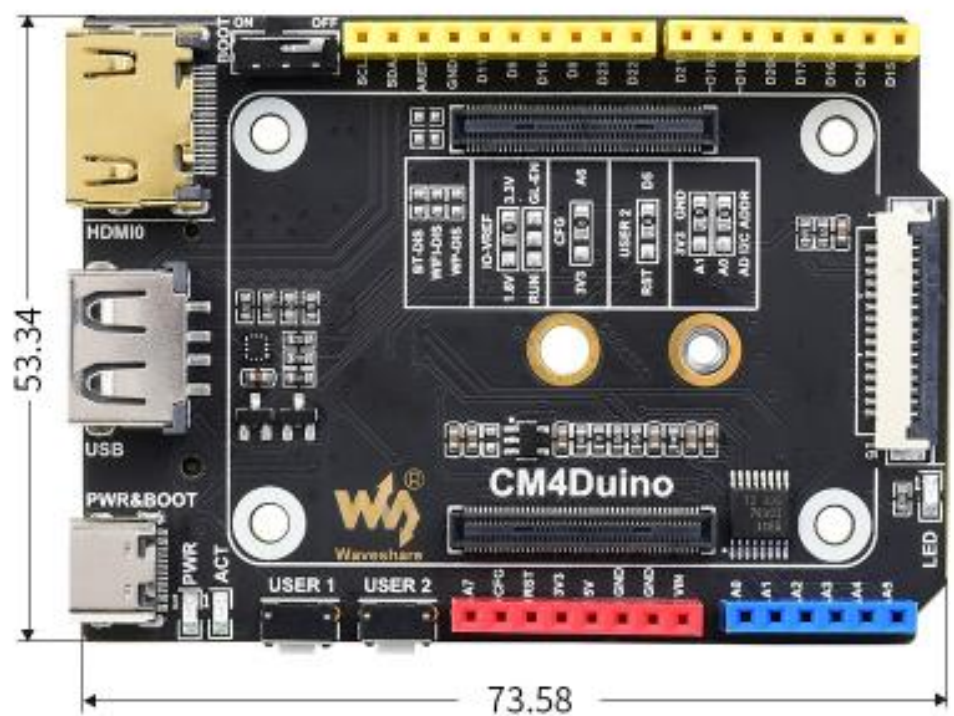

Unit: mm

