



REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.06.05

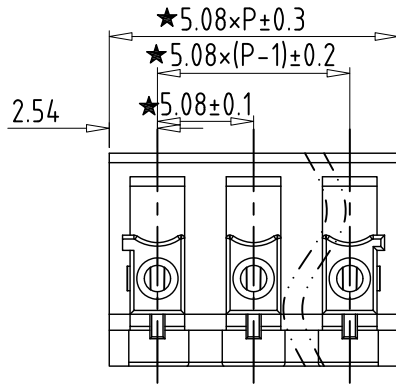

**Electrical :**

- |                                         |                |                        |
|-----------------------------------------|----------------|------------------------|
|                                         | UL             | IEC                    |
| 1.Rated Voltage :                       | 300V           | 450V                   |
| 2.Rated Current :                       | 8A             | 7A                     |
| 3.Torque Value :                        | M2 , 1.77Lb.in | M2, 0.2N.m             |
| 4.Wire Range:                           | 28-16AWG       | 0.5-1.5mm <sup>2</sup> |
| 5.Stripping Length :                    | 7-8mm          |                        |
| 6.Withstanding Voltage :                | AC1600V/1Min.  |                        |
| 7.Operating Temperature :               | -40°C~+105°C   |                        |
| 8.RoHS Compliance                       |                |                        |
| 9.Safty Approval :                      | ULus CE        |                        |
| 10."★" is the key quality control point |                |                        |

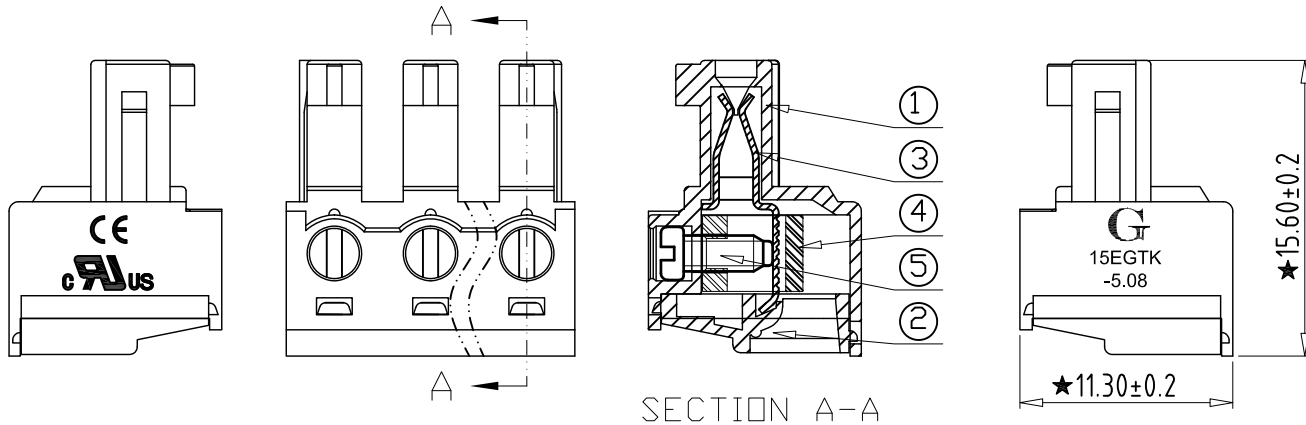

- 15EGTK - 5.08 -XXP - X X - 00
- |               |         |               |                                    |                                                                                                              |                                  |
|---------------|---------|---------------|------------------------------------|--------------------------------------------------------------------------------------------------------------|----------------------------------|
| ①             | ②       | ③             | ④                                  | ⑤                                                                                                            | ⑥                                |
| ① Series NO.  | ② Pitch | ③ Poles       | ④ 1 Single Pitch<br>2 Double Pitch | ⑤ Color: 1 Grey<br>2 Blue<br>3 Black<br>4 Green<br>5 Orange<br>6 Red<br>7 Transparent<br>8 Yellow<br>9 White | ⑥ Customer Request: 00--Standard |
| 02 02Contacts |         | 03 03Contacts |                                    |                                                                                                              |                                  |
| 24 24Contacts |         |               |                                    |                                                                                                              |                                  |

5	SCREW	XX	P	STEEL	Zn Plated
4	BLOCK	XX	P	BRASS	Tin Plated
3	CLAMP	XX	P	PHOSPHOR BRONZE	Ni Plated
2	COVER	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	MYZ	DATE	21.06.05	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	15EGTK-5.08-XXP-XX-00
				DWGNO.	XXXX

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	-	//		
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5		