


VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
UNIT: mm	11-50	±0.5
	51-100	±1
	101-250	±2
	251-500	±5
	501- 1000	±10
	1000-2000	±20

**TTAF
APPROVAL**

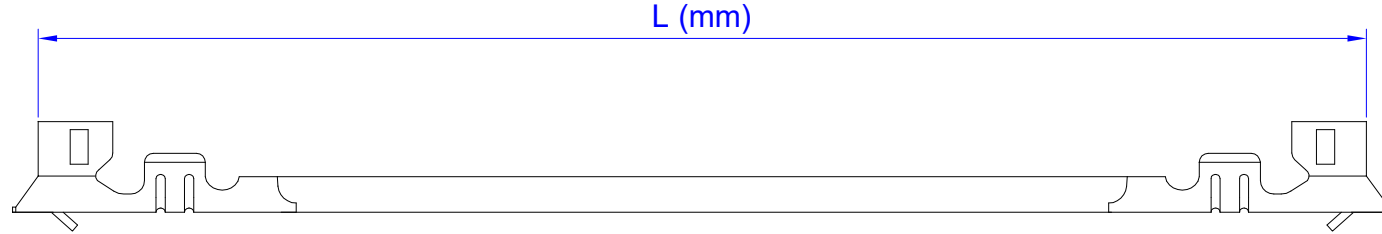

200G1-TP

200G1-TP

TTAF - 0 - YYYY - ZZ - T

MANUFACTURER

CABLE

CABLE LENGTH
(mm)

TERMINAL
SERIES

CONNECTOR
TYPE

- 00-WHITE
- 01-BLACK
- 02-BLUE
- 03-GREEN
- 04-RED
- 05-PURPLE
- 06-BROWN
- 07-GRAY
- 08-PINK
- 09-ORANGE
- 10-YELLOW


- 2317 (2,5mm)
- 1800 (1,25mm)
- 5558 (mikrofit 3,0mm)
- 5557 (minifit 4,2mm)

- T:SOCKET TO WIRE LEADS
- C:SOCKET TO SOCKET

2	200G1-TP	Terminal	-	2	pcs.
1	KBL-15XX	UL1007 AWG24 KABLO	-	1	pcs.
No	Material Code	Description	Size (mm)	Q'ty	Unit
Date	3.01.2023	Rev.	Revision Detail		Rev.Dt. Rev.by Part No
Designed by	Zeynep ŞAHİN				TTAF-0-YYYY-ZZ-T
Checked by	Ersin YÜKSEL				
		Drawing Nr.	Scale	Sheet No	
		-	NONE	1/1	





Ürün	Akım Değeri	Voltaj Değeri	Dayanma Gerilimi	Çalışma Sıcaklığı
TTAF-0-YYYY-200G1-T	2A	100V	800VAC @ 60s	-40°C ~ +85°C

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001- >	±150




▲ Order Code : 200G1-TP

**TTAF
APPROVAL**

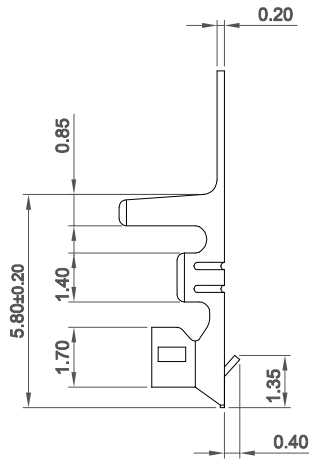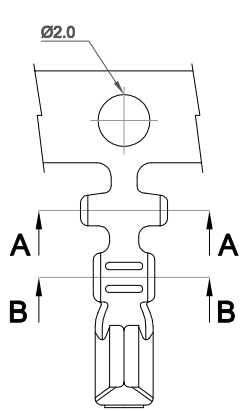

Sec:A-A



Sec:B-B

Wire Range	Insulation O.D.	Material	Finish	Qty/reel
AWG#26..#30	1.4 mm (max)	Phosphor Bronze	Tin-Plated	10.000 pcs

Date	-	Rev.	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yeşim AKSOY	-				200G1-TP		
Checked by	Fatih BOLACA							
						Drawing Nr.	Scale	Sheet No
							NONE	1/1