


1 2 3 4 5 6 7 8

A

A

$1.27 * \text{No. of Positions} + 14.5 \pm 0.3$

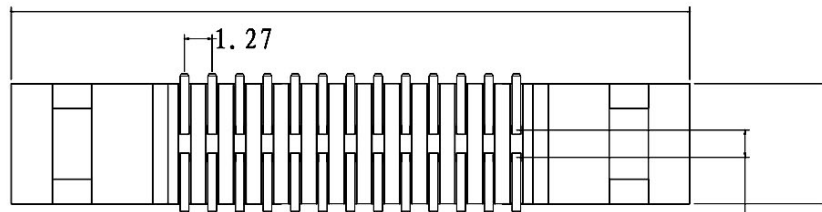

5.6 ± 0.1

SPECIFICATIONS


Current Rating : 1AMP
 Operation Temperature: -40°C to $+105^{\circ} \text{C}$
 Contact Resistance : $20\text{m}\Omega$ Max.
 Insulation Resistance: $1000\text{M}\Omega$ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: LCP
 Contact Material : Brass
 Contact plating : Au over $50\mu\text{Ni}$

B

B

C



C



1.27

D

D

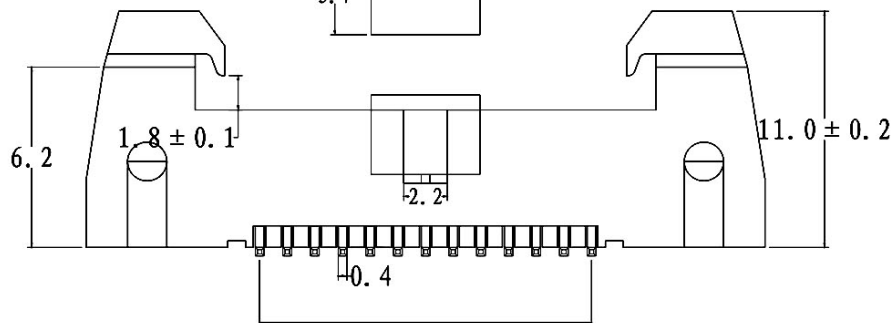


E

E

$1.27 * \text{No. of Contacts} / 2 - 1.27 \pm 0.1$

F

F

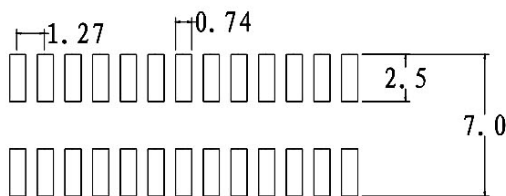

G

G

H

H

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 参考	TOLERANCE 容許公差 X: ± 0.30 Y: ± 0.20 X*: $\pm 1^*$ XX: ± 0.15 XX*: $\pm 0.05^*$ XXX: ± 0.05	PART NAME 品名 SHROUDED HEADER 1.27mm X1.27mm XXP SMT TYPE GOLD FLASH PLATED WITHOUT LOCATING PEG REEL+CAP PACKING BLACK COLOR ROHS
DWG. 製圖 Lena	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 C3505-XXDNGBQ0R
DATE 制表日 2023/03/01	PAGE 張數 1 OF 1	REV. 版本 A	

1 2 3 4 5 6 7 8