

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利等权利外，本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.2.3







2

3

4

5

6

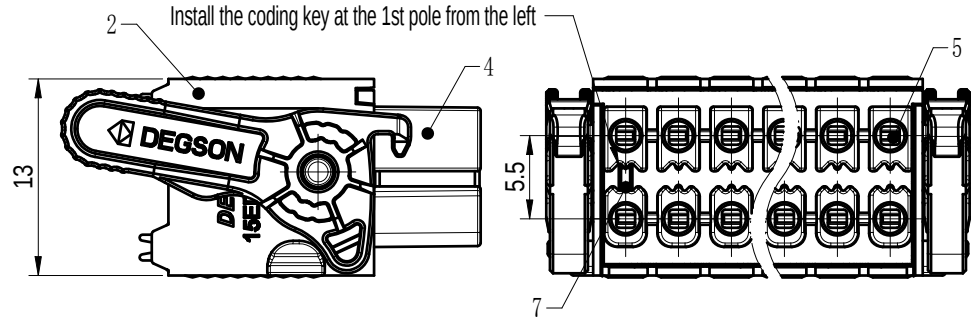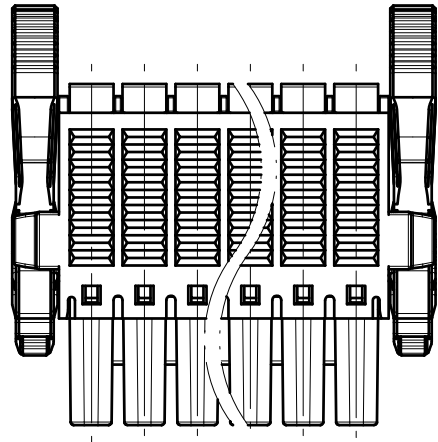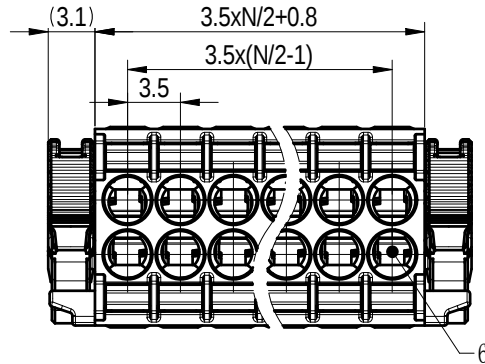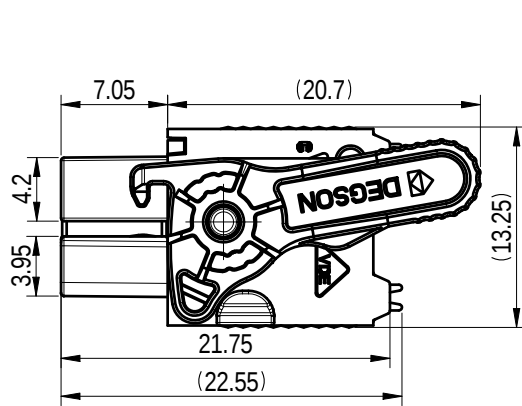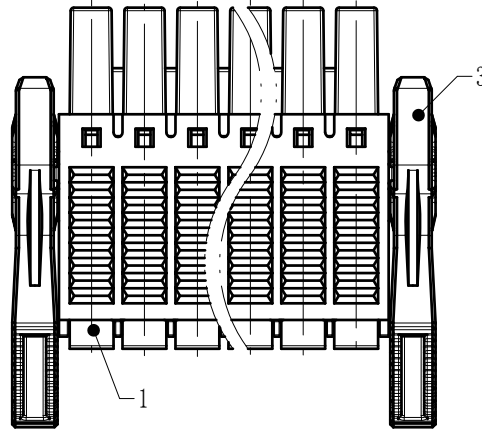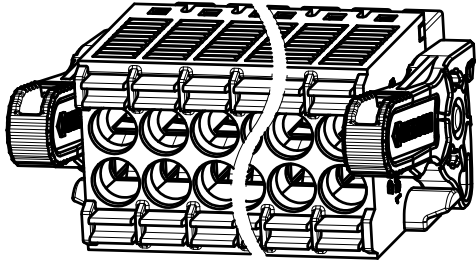

未注公差/General tolerances (mm)													
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500 ~ /
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
UL 标准/UL Standard:											B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)											300/8	50/8	/
IEC 标准/IEC Standard:													
过压类别/Overvoltage Category/污染等级/Pollution Degree											III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)											200/9.5	250/9.5	320/9.5
额定脉冲电压 (KV)/Rate Impulse Voltage (KV)											2.5	2.5	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)											26~16 / 0.2~1.5		
间距/Pitch(mm)/线数范围/Poles											3.50/N=04~48P		
剥线长度/Stripping length(mm)											9~10		
使用温度范围/Operating temperature(°C)											-40~+105		
符合RoHS环保要求/Conform to RoHS											Yes		

7	Coding key	Thermoplastic	UL94V-0
6	Spring	Stainless steel	/
5	Clamp	Copper alloy	Sn plated
4	Cover	PA66	UL94V-0
3	Card hook	PA66+GF	UL94V-0
2	Housing	PA66	UL94V-0
1	Button	POM	UL94HB
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:		SURFACE/COLOR:	
APPD: 龚耀志		MAT NO./REV:		MAT STATUS: 批量	
CHKD: 刘强		NAME		15EDGKNHG-3.5-XXP-1Y-92Z(H)	
DRFT: 杨帅杰		DRAWING NO.		DRAWING STATUS	
A4		200446742		已发布	
A4		CUSTOMER DRAWING		SCALE	
A4		2:1		SHEET	
A4		1/1			

00			杨帅杰	2026.05.07
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6