



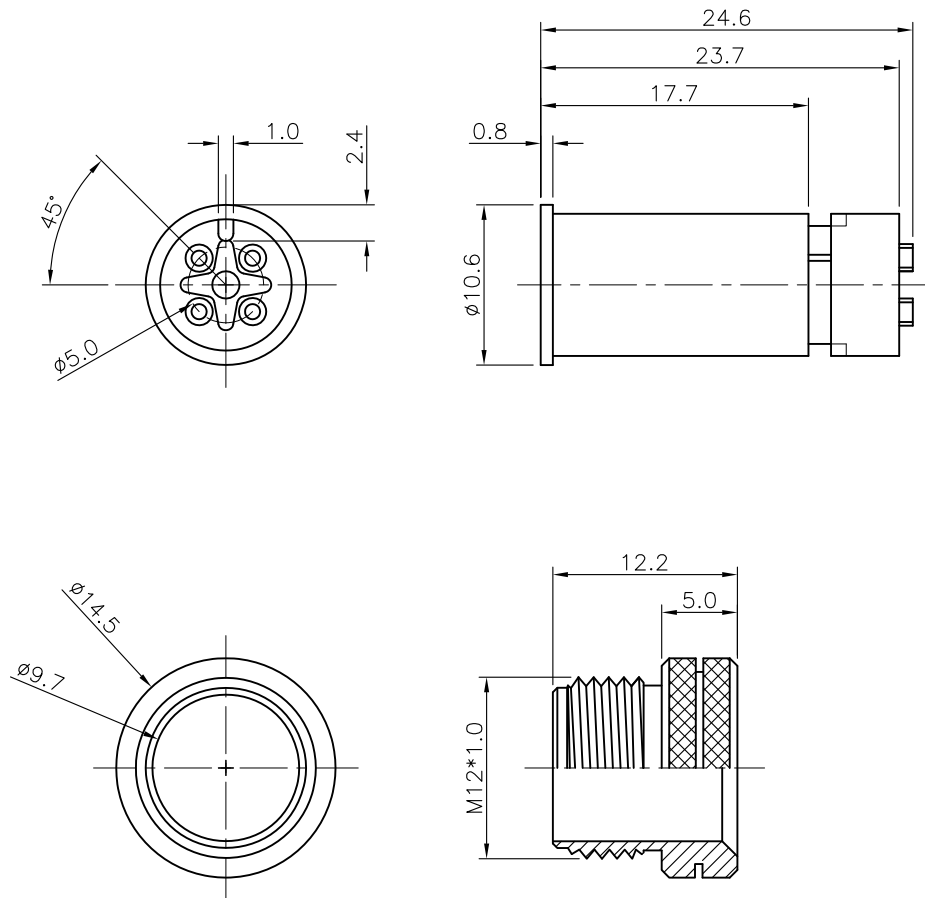

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2016/11/25

SPECIFICATION:

1. Current Rating: 5A
2. Voltage Rating: 125V
3. Waterproof: IPX7
4. Operating temperature range: -40°C~+85°C

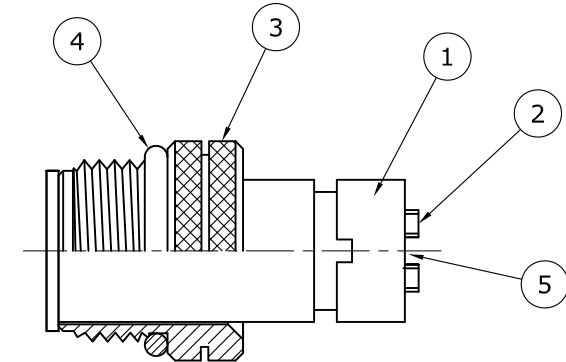

5	EPOXY	EF400A & EF400B, Black	
4	O-RING	EPDM, Black	
3	NUT	Brass, Nickel plating	
2	CONTACT	Brass, 10u" Gold plating over Nickel	
1	HOUSING	PBT, UL94V-0, Black	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
 ATTEND			
WWW.ATTEND.COM.TW			
DRAWN	Fros	2016/11/25	DRAWN NAME: M12 A-Code Plug for Cable, 4Pin Male For Overmold with Cable
CHECKED	Tim	2016/11/25	
APPROVED	Ken	2016/11/25	
	SCALE	SHEET	SIZE
	2/1	1/1	A4
FILE NAME		216A-04MO0_B_1	



WWW.ATTEND.COM.TW

DRAWN NAME:
M12 A-Code Plug for Cable,
4Pin Male For Overmold with Cable

PRODUCT NO. 216A-04MO0