

SPECIFICATION

Rated Current: 1.5A
Rated Voltage: 5V
Contact Resistance: 30mΩ Max.
Operation Temperature:-20°C to +85°C


NOTE


1.Material:Titanium Copper
2.Thickness: 0.08mm
3.Electroplate:
Au >1u" on contact area
Gold Flash on Solder area
Nickel Underplating over All

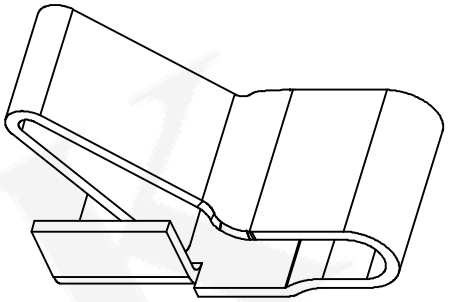


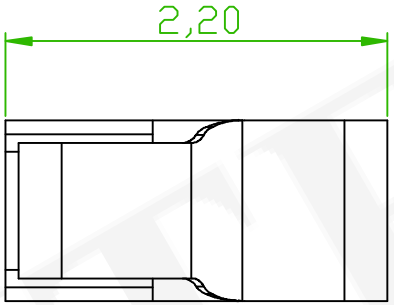

AMTEK糧德
2019.06.06
Released DCC

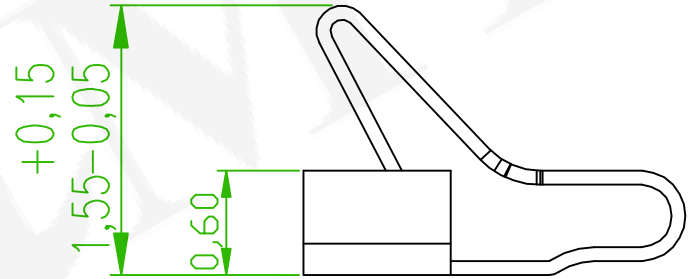

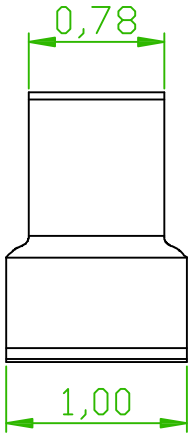

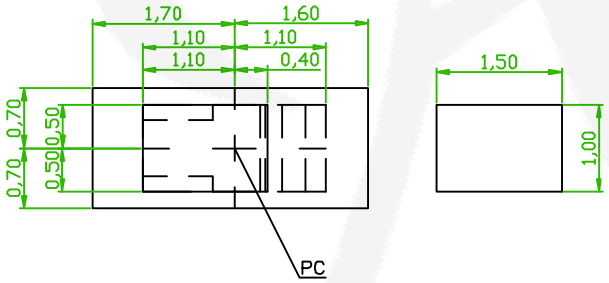

RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	EMI SPRING			頁數 Page	1/1
品號 PART NO.	3SQT-NN15NN-NNA2G			繪圖 DRAWN	Nick 2019/06/05
圖號 DRAWING NO.	GW271-NI185	版本 REV.	A	核對 CHECKED	Josh 2019/06/05
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/06/05
公差 TOLERANCE	±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	