NOTE


Material: Copper Alloy
Thickness: 0.12mm
Electroplate:
- Gold Flash plating on contact area
- Gold Flash on solder area
- Nickel underplating over all


Electrical Characteristics:
- Current Voltage: 12V
- Current Rate: 3A
- Contact Resistance: Normal Compression<30mΩ

Working Height of Application: 1.30~1.90mm
Spring Force Tolerance is ±20gf
Operating Temperature: -20°C~+85°C

AMTEK糧德
2022.03.04
Released DCC

certified Pb RoHS Compliant

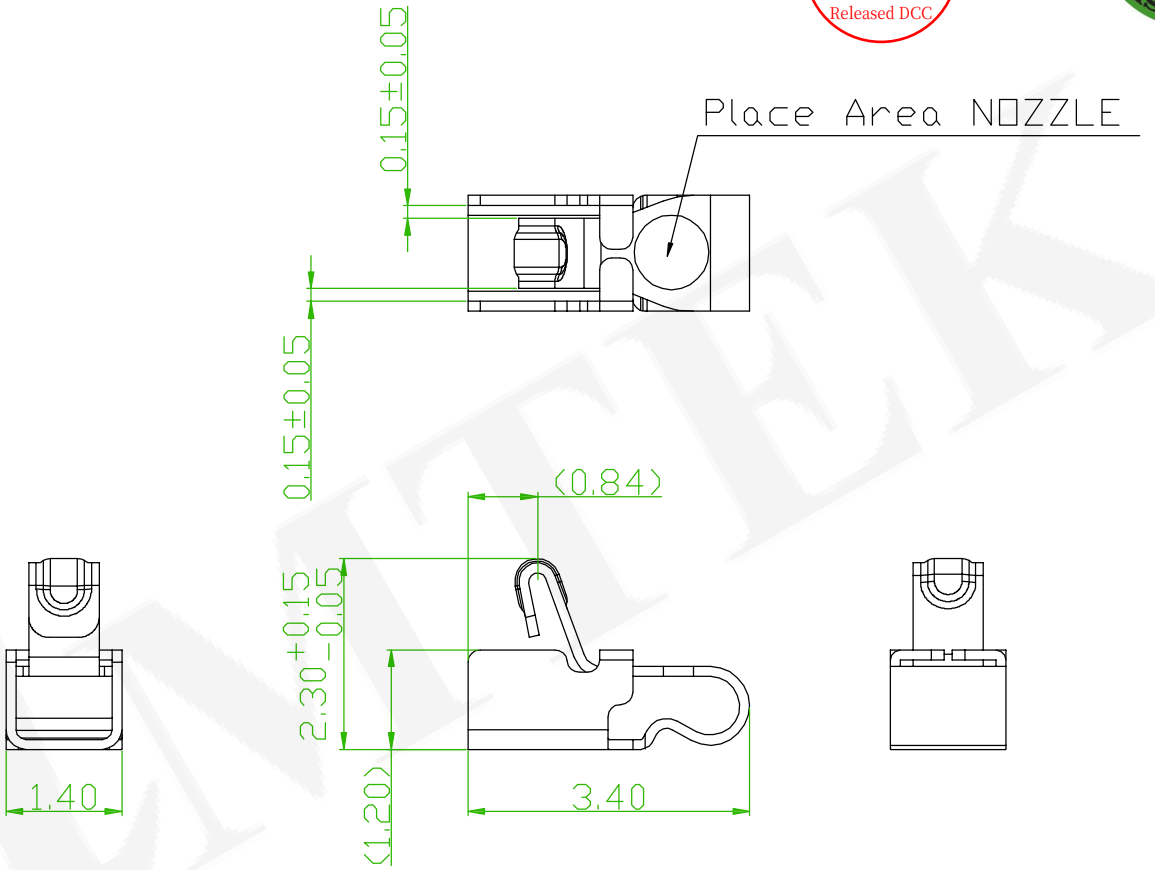

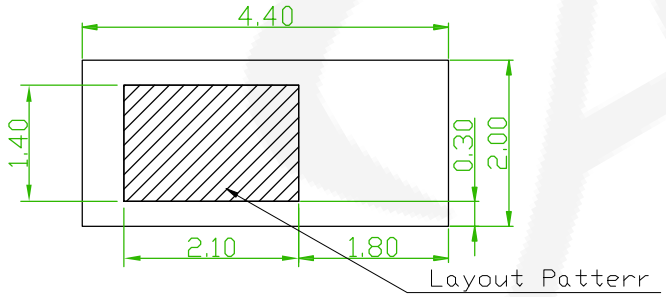

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	EMI SPRING			頁數 Page	1/1
品號 PART NO.	3SQT-NN23NN-NNNNG			繪圖 DRAWN	Benson 2022/03/03
圖號 DRAWING NO.	GW271-BN949	版本 REV.	A	核對 CHECKED	Josh 2022/03/03
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2022/03/03
公差 TOLERANCE	±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	