
NOTE


Material: Titanium Copper
Thickness: 0.10mm
Electroplate:
- Gold Flash on contact area
- Gold Flash on solder area
- Nickel underplating over all

Electrical Characteristics:
- Current Voltage: 12V
- Current Rate: 3A
- Contact Resistance: Normal Compression<30mΩ


Working Height of Application: 1.95~3.00mm
Spring Force Tolerance is ±20gf
Operating Temperature: -20°C~+85°C


certified Pb RoHS Compliant



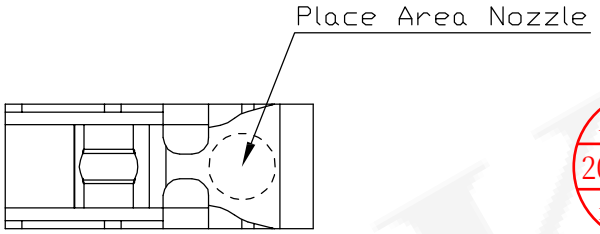

AMTEK糧德
2022.04.28
Released DCC

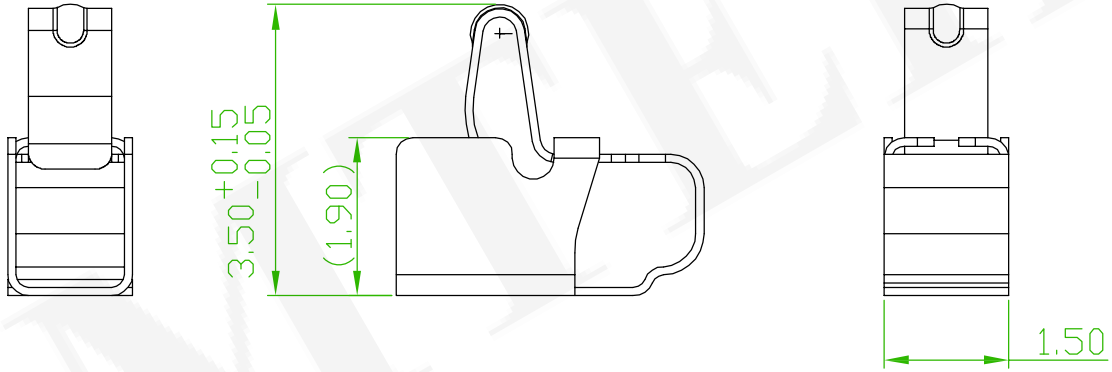

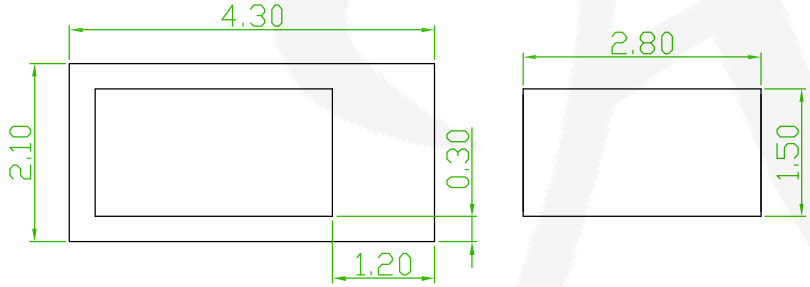

RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	EMI SPRING			頁數 Page	1/1
品號 PART NO.	3SQT-NN35NN-NNA2G			繪圖 DRAWN	Alice 2022/04/27
圖號 DRAWING NO.	GW271-AB247	版本 REV.	A	核對 CHECKED	Josh 2022/04/27
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2022/04/27
公差 TOLERANCE	±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	