



AS403(RL15)




AS404(JD1929)



AS403 1Z 1H



As404 1Z 1H



Contact specification

	AS403
Contact form	1H、1Z
Contact resistance	≤50mΩ（1A 6VDC）
Contact material	AgCdO AgSnO2
Contact capacity	30A 12VDC

Technical specification

Insulation resistance	≥50mΩ（500VDC）
Dielectric strength	Between coil and contact ≥500VAC 1min
	Between open contacts ≥500VAC 1min
Operate / Release time	≤15ms/10ms
Terminal type	Quick terminal mounting

Coil specification


Rated coil power	1.8W

Coil data


Nominal voltage	Operate voltage	Release voltage	Coil resistance
VDC	VDC	VDC	Ω ± 10%
5	3.5	0.5	16
6	4.2	0.6	20
12	8.4	1.2	85
24	16.8	2.4	320

Outline dimension、Mounting holes (Bottom view)、Wiring diagram (Bottom view)

AS403 Outline dimension

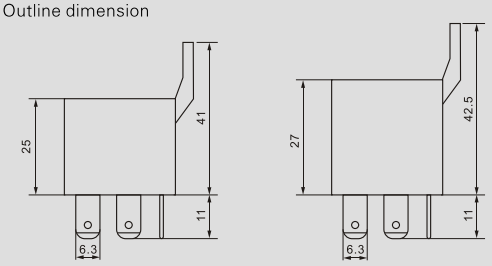

AS403 Mounting holes (Bottom view)



AS403 Wiring diagram (Bottom view)

