

DUCATI energia	CAPACITOR for	C = 54.8 μ F 450 Vac / 850 Vdc
S.p.A	POWER ELECTRONIC	Part. Number : 416.74.7080
	- GENERAL PURPOSE APPLICATIONS -	

CHARACTERISTICS

Rated Capacitance	54,8	μ F
Capacitance Tolerance	$\pm 10\%$	
Rated AC Voltage (Urms)	450	V
Rated DC Voltage (Un)	850	V
Maximum Current (Imax) @ θ_{MAX}	16	A
Self-inductance	< 160	nH
Equivalent series resistance (RESR)	< 8	m Ω
Typical tan d (10E-4)	6,0	(Measure @ 50Hz)
Thermal resistance natural cooling (R _{THN})	2,0	°C/W
External discharge resistance	330	k Ω – 1W
Filler material	Polyurethane Resin	
Dielectric	PPM Film	
Over pressure safety device		
Aluminium case		
Weight	≤ 460	g

MAXIMUM RATINGS

Over voltage	1.1 Un	8hours/day
Non-recurrent surge voltage (Us)	1600	V
Maximum peak current (I _{PK})	1,8	kA
Max. Voltage raise of rise (dV/dt)	32	V/ μ s
Maximum surge current (Is)	4,5	kA

TEST DATA

DC Test voltage terminal to terminal	1,5xUn x 10s	Vdc
AC test voltage terminal to case	3kVx 10s	Vac 50Hz

CLIMATIC CATEGORY

Min.operating temperature (θ_{MIN})	-25	°C
Max. operating temperature (θ_{MAX})	+70	°C
Storage temperature	-40 +85	°C
Altitude maximum	2000m	a.s.l.


Failure quota	50/10E9	
Expected life (Ln)	100.000 h @ 450Vac / 50Hz	

Humidity category	According to DIN 40040	F
Insulating	According to UL 810 / UL 840	
Vibration resistance	According to EIA STAND. RS-186-7E	

STANDARDS

IEC 61071-1/2
UL - CSA approval [File No. E192559]

Total elongation is about 20 mm after the overpressure disconnecter release.
Don't use rigid connections.

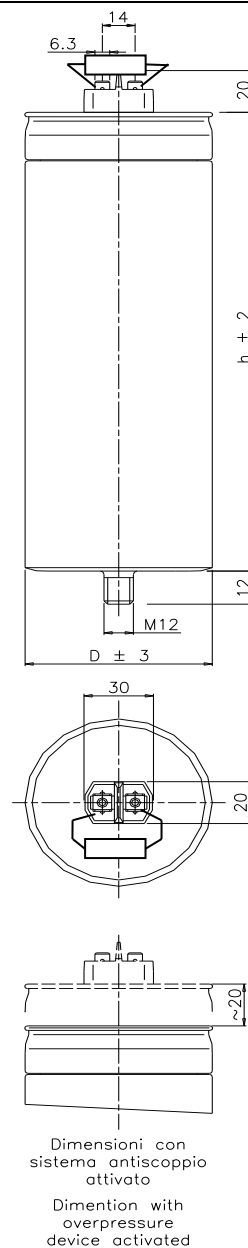

D [mm]	h [mm]
60	150

Maximum torque for M12 Fixing Stud	10Nm
------------------------------------	------

Release	Date	Description	Technician
-	15/05/2018	First issue (preliminary code: 216740342)	A. Govoni