
Quectel EG800AK-EU/ -LA/ -JP/ -GL

IoT/ M2M-optimized LTE Cat 1bis Module

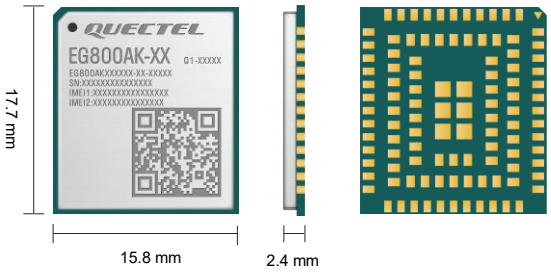

This document is only applicable to the EG800AK-EU, EG800AK-LA, EG800AK-JP, and EG800AK-GL industrial-grade modules.


EG800AK-EU/ -LA/ -JP/ -GL is an LTE Cat 1bis wireless communication module specially designed by Quectel for M2M and IoT applications. It supports maximum data rates of 10 Mbps downlink and 5 Mbps uplink. Designed in the compact and unified form factor, EG800AK-EU/ -LA/ -JP/ -GL is compatible with LTE Standard EC800M-CN, EC800K-CN, EG800K series and EG810M series modules in package.

The module covers the frequency bands of different countries and regions, and adopts the laser engraving process to get a more fashionable appearance, strong metallic texture, better heat dissipation, durable label information, which makes it more suitable for automation requirements.

A rich set of Internet protocols, industry-standard interfaces, a variety of drivers and abundant functionalities (USB serial drivers for Windows 10/ 11, Linux, Android and other operating systems) extend the applicability of the module to a wide range of M2M and IoT applications such as tracker, POS, IPC, data card, smart safety and industrial PDA.

Key Features

- Ultra-small size, designed for M2M and IoT applications, especially for small-size terminals
- Support DFOTA
- Support Wi-Fi Scan (Optional)
- Support Dual SIM Single Standby Single Active (Optional)
- Support GNSS (Optional)
- Super cost-effective

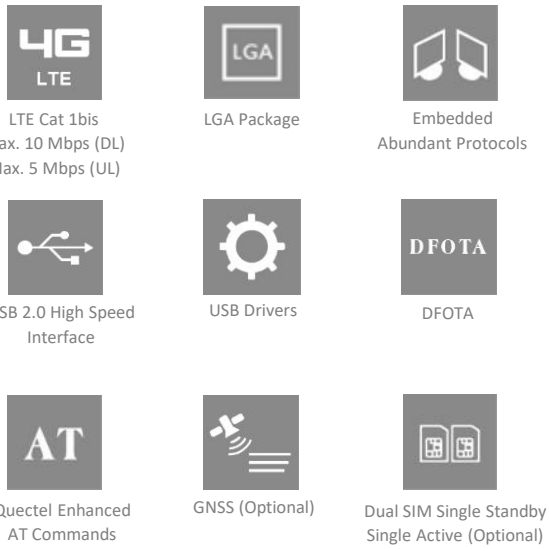

Version: 1.1 | Status: Released

Quectel EG800AK-EU/ -LA/ -JP/ -GL

LTE Cat 1bis	EG800AK-EU	EG800AK-LA	EG800AK-JP	EG800AK-GL
Region/ Operator	Europe/ New Zealand/ Australia	Argentina/ Mexico/ Brazil	Japan	Global
Package	LGA	LGA	LGA	LGA
Dimensions (mm)	17.7 × 15.8 × 2.4	17.7 × 15.8 × 2.4	17.7 × 15.8 × 2.4	17.7 × 15.8 × 2.4
Weight (g)	Approx. 1.35	Approx. 1.35	Approx. 1.35	Approx. 1.35
Temperature Range				
Operating Temperature	-35 °C to +75 °C	-35 °C to +75 °C	-35 °C to +75 °C	-35 °C to +75 °C
Extended Temperature	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C
Frequency Bands				
LTE-FDD	B1/ 3/ 5/ 7/ 8/ 20/ 28	B2/ 3/ 4/ 5/ 7/ 8/ 28/ 66	B1/ 2/ 3/ 4/ 5/ 7/ 8/ 12/ 13/ 14/ 17/ 18/ 19/ 20/ 25/ 26/ 28/ 66/ 71	B1/ 2/ 3/ 4/ 5/ 7/ 8/ 12/ 13/ 14/ 17/ 18/ 19/ 20/ 25/ 26/ 28/ 66/ 71
LTE-TDD	-	-	B34/ 38/ 39/ 40/ 41	B34/ 38/ 39/ 40/ 41
GNSS (Optional)	GPS/ BDS/ GLONASS/ Galileo	GPS/ BDS/ GLONASS/ Galileo	-	-
Certifications				
Carrier	-	-	**Japan:** NTT DOCOMO*/ KDDI*/ SoftBank*/ Rakuten*	**Europe:** Vodafone/ Telefonica*
Regulatory/ Conformance	**Europe:** CE **Australia/ New Zealand:** RCM	**America**: FCC **Brazil:** Anatel	**Japan:** JATE/ TELEC	**Global:** GCF **Europe:** CE **Brazil:** Anatel **China:** NAL/ CCC/ SRRC **Japan:** JATE/ TELEC **Korea:** KC **Australia/ New Zealand:** RCM
Others	WHQL/ RoHS	WHQL/ RoHS	WHQL/ RoHS	WHQL/ RoHS
Max. Data Rates				
LTE-FDD (Mbps)	10 (DL)/ 5 (UL)	10 (DL)/ 5 (UL)	10 (DL)/ 5 (UL)	10 (DL)/ 5 (UL)
LTE-TDD (Mbps)	-	-	8.96 (DL)/ 3.1 (UL)	8.96 (DL)/ 3.1 (UL)
Interfaces				
USIM①	× 2, 1.8/ 3.0 V	× 2, 1.8/ 3.0 V	× 2, 1.8/ 3.0 V	× 2, 1.8/ 3.0 V
UART	× 3 (main, debug and auxiliary UART③)	× 3 (main, debug and auxiliary UART③)	× 3 (main, debug and auxiliary UART③)	× 3 (main, debug and auxiliary UART③)
USB 2.0	× 1	× 1	× 1	× 1
ADC	× 2	× 2	× 2	× 2
NET_STATUS	× 1	× 1	× 1	× 1
STATUS	× 1	× 1	× 1	× 1
I2C③	× 1 (QuecOpen® solution: × 2)	× 1 (QuecOpen® solution: × 2)	× 1 (QuecOpen® solution: × 2)	× 1 (QuecOpen® solution: × 2)
LCM②	× 1	× 1	× 1	× 1
SPI②	× 1	× 1	× 1	× 1
Matrix Keypad (3 × 4) ②	× 1	× 1	× 1	× 1
USB_BOOT	× 1	× 1	× 1	× 1
RESET_N	× 1	× 1	× 1	× 1
PWRKEY	× 1	× 1	× 1	× 1
LTE/ Wi-Fi Scan (Optional) Antenna	× 1	× 1	× 1	× 1
GNSS Antenna (Optional)	× 1	× 1	-	-
Enhanced Features				
DFOTA	●	●	●	●
Wi-Fi Scan	○	○	○	○
QuecOpen®	●	●	●	●
QuecPython®	●	●	●	●
USIM1 Card Detection	●	●	●	●

NOTE:
1. *: Under development/ in progress.
2. ①: USIM2 interface only supports 1.8 V power domain.
3. ②: Only supported by QuecOpen® solution.
4. ③: The interface is under development in standard solution. While in QuecOpen® solution, the interface has been supported.
4. ●: Supported.
5. ○: Optional.

Copyright © 2026 Quectel Wireless Solutions Co., Ltd. All Rights Reserved http://www.quectel.com
Quectel Global Center: No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China
Tel: +86 21 51086236 Email: info@quectel.com

Quectel EG800AK-EU/ -LA/ -JP/ -GL

LTE Cat 1bis		EG800AK-EU	EG800AK-LA	EG800AK-JP	EG800AK-GL
Software Features					
Protocols④		TCP/ UDP/ PPP/ NTP/ NITZ/ FTP/ HTTP/ PING/ HTTPS/ FTPS/ SSL/ FILE/ MQTT	TCP/ UDP/ PPP/ NTP/ NITZ/ FTP/ HTTP/ PING/ HTTPS/ FTPS/ SSL/ FILE/ MQTT	TCP/ UDP/ PPP/ NTP/ NITZ/ FTP/ HTTP/ PING/ HTTPS/ FTPS/ SSL/ FILE/ MQTT	TCP/ UDP/ PPP/ NTP/ NITZ/ FTP/ HTTP/ PING/ HTTPS/ FTPS/ SSL/ FILE/ MQTT
Drivers	**RIL**	Android 4.x–16.x	Android 4.x–16.x	Android 4.x–16.x	Android 4.x–16.x
	USB RNDIS	Windows 10/ 11 Linux 2.6–6.17	Windows 10/ 11 Linux 2.6–6.17	Windows 10/ 11 Linux 2.6–6.17	Windows 10/ 11 Linux 2.6–6.17
	USB ECM	Linux 2.6–6.17	Linux 2.6–6.17	Linux 2.6–6.17	Linux 2.6–6.17
	USB Serial	Windows 10/ 11 Linux 2.6–6.17 Android 4.x–14.x	Windows 10/ 11 Linux 2.6–6.17 Android 4.x–14.x	Windows 10/ 11 Linux 2.6–6.17 Android 4.x–14.x	Windows 10/ 11 Linux 2.6–6.17 Android 4.x–14.x
Electrical Features					
Supply Voltage Range		3.4–4.3 V DC，typ. 3.8 V	3.4–4.3 V DC，typ. 3.8 V	3.4–4.3 V DC，typ. 3.8 V	3.4–4.3 V DC，typ. 3.8 V
Power Consumption (Typical)		4.10 μA @ Power off 1.15 mA @ LTE-FDD Sleep (PF = 128) 1.07 mA @ LTE-FDD Sleep (PF = 256) 9.57 mA @ LTE-FDD Idle (PF= 64, USB disconnected) 21.11 mA @ LTE-FDD Idle (PF= 64, USB connected)	4.10 μA @ Power off 0.92 mA @ LTE-FDD Sleep (PF = 128) 0.83 mA @ LTE-FDD Sleep (PF = 256) 9.31 mA @ LTE-FDD Idle (PF= 64, USB disconnected) 20.90 mA @ LTE-FDD Idle (PF= 64, USB connected)	5.5 μA @ Power off 0.98 mA @ LTE-FDD Sleep (PF = 128) 0.90 mA @ LTE-FDD Sleep (PF = 256) 9.27 mA @ LTE-FDD Idle (PF= 64, USB disconnected) 21.06 mA @ LTE-FDD Idle (PF= 64, USB connected)	5.5 μA @ Power off 0.98 mA @ LTE-FDD Sleep (PF = 128) 0.90 mA @ LTE-FDD Sleep (PF = 256) 9.27 mA @ LTE-FDD Idle (PF= 64, USB disconnected) 21.06 mA @ LTE-FDD Idle (PF= 64, USB connected)

NOTE:

④: PPP, FTP, HTTP, HTTPS, FTPS and FILE protocols are optional.

Copyright © 2026 Quectel Wireless Solutions Co., Ltd. All Rights Reserved http://www.quectel.com
Quectel Global Center: No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China
Tel: +86 21 51086236 Email: info@quectel.com