


REV.	CHANGE CONTENT	BY	DATE
A			



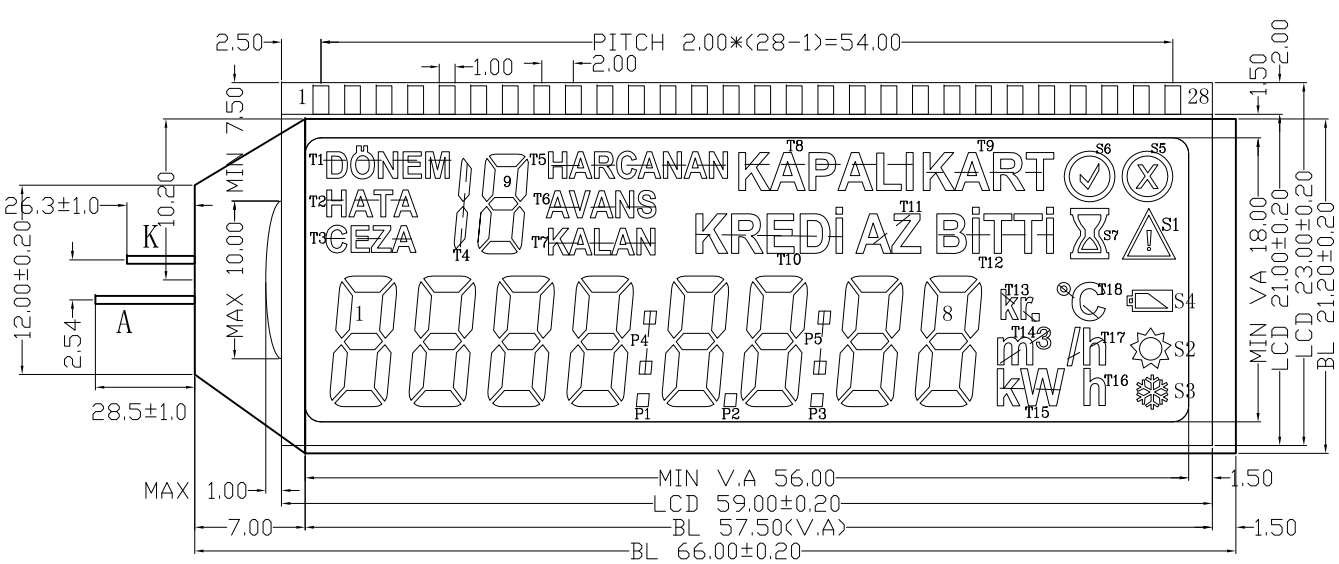

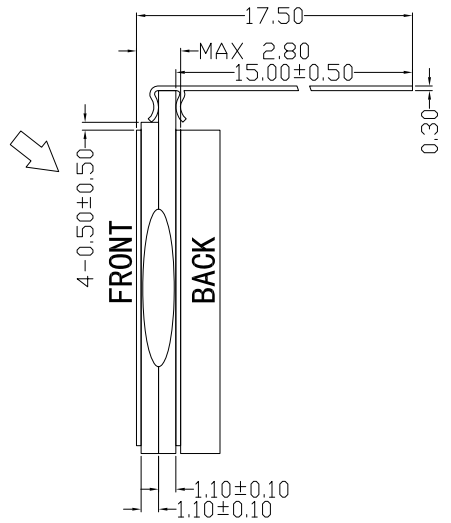

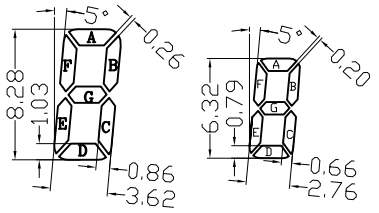

(1-8) (9)

NOTES:

1. Display type: TN
2. Viewing direction: 12 O'CLOCK
3. Drive method: 1/4DUTY 1/3BIAS
4. Polarizer mode: POSITIVE/TRANSFLECTIVE
5. LCD drive voltage: 3.0 V
6. Operation temperature: −20°C TO + 70°C
7. Storage temperature: −30°C TO + 80°C
8. Driver/Controller IC:
9. CONNECTOR: PIN
10. LED BACKLIGHT: WHITE,1DES,IF=15MA(VF: 2.8−3.4V)
11. UNMARKED TOLERANCE: ±0.2mm
12. ROHS

PACKAGING: Pearl cotton tray

北京海迅华田电子有限公司			DRAWING No. : HS00B35-VA	
			DRAWING TITLE:LCD MODULE	
			FILE NO.:	
DESIGN	CCX	16.04.05	REV. : A	SCALE : −
CHECKED	HY	16.04.05	PROJECTION:	UNIT : MM
APPROVED	HY	16.04.05		SHEET : 1/1