


REV.	CHANGE CONTENT	BY	DATE
A	FIRST	ZJ	2025.12.03

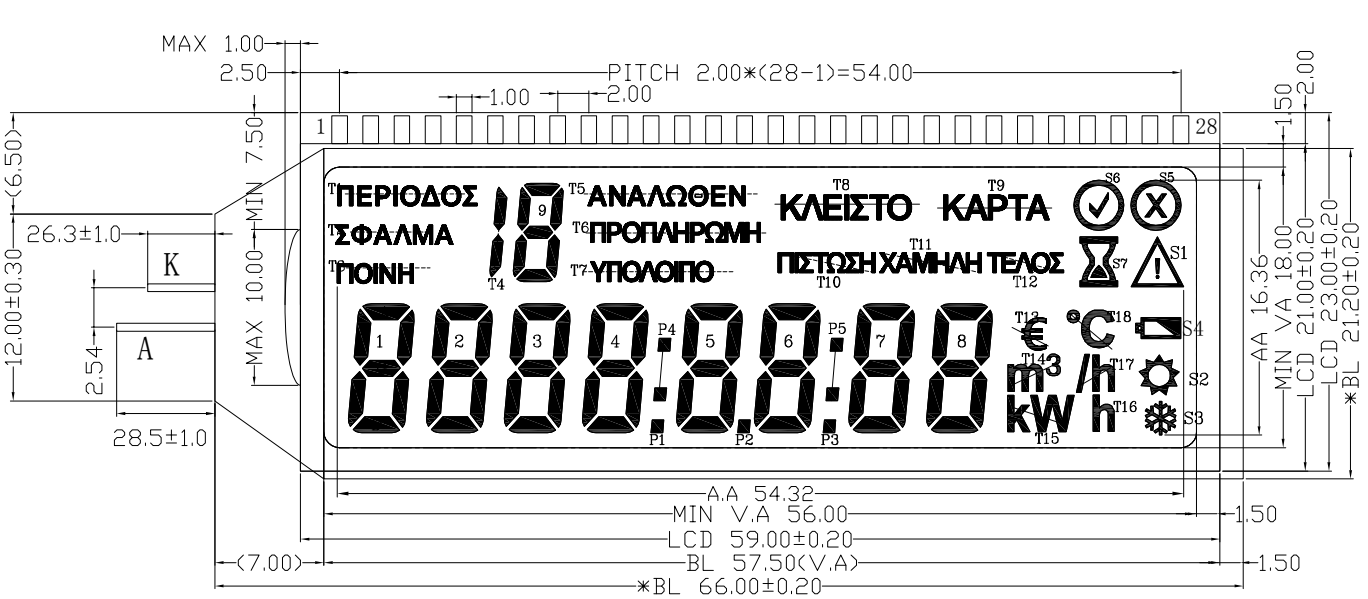


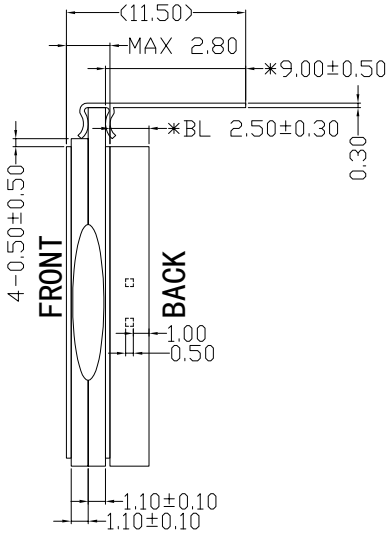

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
COM1				COM1	1A	T3	2A	T2	3A	T1	T4	9A	T10	T11	S7				P4	8A	P5	7A	P3	6A	P2	5A	P1	4A
COM2			COM2		1F	1B	2F	2B	3F	3B	9B	9F	T7	T12	S1	S4	T18	T13	8B	8F	7B	7F	6B	6F	5B	5F	4B	4F
COM3		COM3			1E	1G	2E	2G	3E	3G	9G	9E	T6	T9	S5	S2	T17	T14	8G	8E	7G	7E	6G	6E	5G	5E	4G	4E
COM4	COM4				1D	1C	2D	2C	3D	3C	9C	9D	T5	T8	S6	S3	T16	T15	8C	8D	7C	7D	6C	6D	5C	5D	4C	4D



(1-8)




(9)


HS NOTE:	
显示类型 Display type	TN
显示模式 Display mode	Transflective Positive
视察方向 Viewing direction	12 O'clock
驱动方式 Driving method	1/4 Duty 1/3 Bias
连接方式 Connector	PIN
背光特性 LED backlight	WHITE, 1DES, IF=15MA(VF:2.8-3.4V)
供电电压 Operating Voltage	VLCD=3.0V
工作温度 Operation temperature	-20℃ to 70℃
存储温度 Storage temperature	-30℃ to 80℃
未标注公差 Unmarked tolerance	±0.3mm

PACKAGING:Pearl cotton tray

HTDISPLAY Co.,Ltd.			DRAWING No. :HS00B35-VB	
			DRAWING TITLE:LCM	
			FILE NO. : 1	
DESIGN	陈东	2025.12.03	REV. : A	SCALE: 1:1
CHECKED	JYQ	2025.12.03	PROJECTION:	UNIT: mm
APPROVED	HK	2025.12.03		SHEET: 1/2

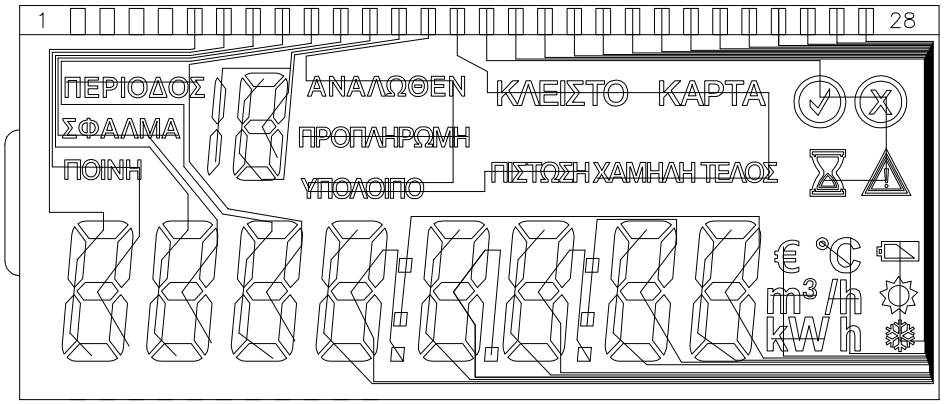

SEG

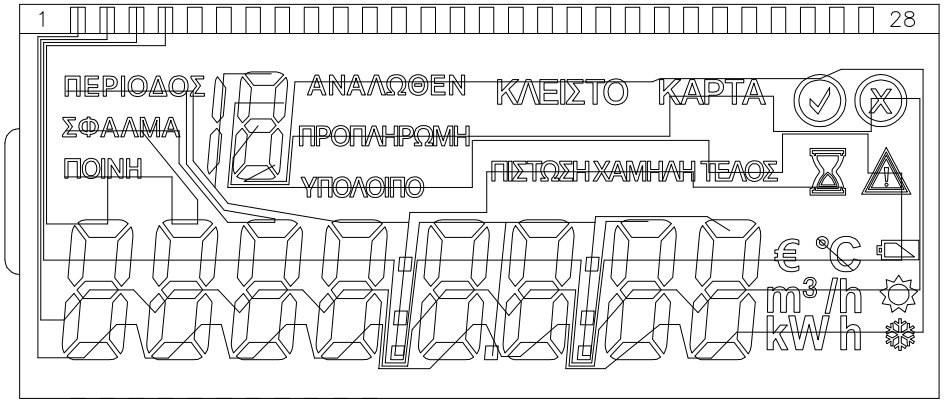

COM

此页面仅供走线参考

HTDISPLAY Co.,Ltd.			DRAWING No. :HS00B35-VB	
			DRAWING TITLE:LCM	
			FILE NO. : 1	
DESIGN	陈东	2025.12.03	REV. : A	SCALE: 1:1
CHECKED	JYQ	2025.12.03	PROJECTION:	UNIT: mm
APPROVED	HK	2025.12.03		SHEET: 2/2