
RoHS Compliance

Bushing

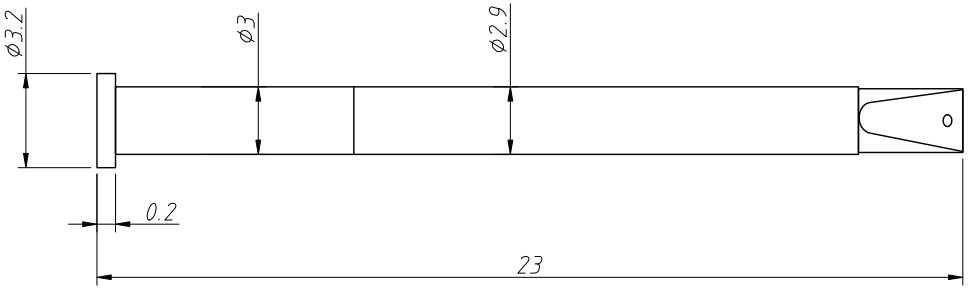

Notes:

1.Material:

Needle Bar:Beryllium Copper,Gold Plated

Needle Tubing:Phosphor Bronze,Gold Plated

Bushing:Brass,Gold Plated

Spring:Stainless Steel

2.Electric:

Drill Size:Ø3.0mm

Rated Current:24A

Rated Resistance:20mΩ

Compaction Elasticity:450g

Max Travel:5.3mm

Work Temperature:-100°C~200°C

ANGLE TOLERANCE	PROJECTION		Description:	Probe Pin
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-S25-022-G
x.x ±0.30	SHEET SIZE	A4	XX	
x.xx ±0.20	Draw:	Daniel	2023-07-05	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2023-07-05	