Product Specification

Number: L-KLS2-FT012-10HP-04P-MW

Name: Feed through terminal blocks

Customer: _____

Date: 2025-08-01

Customer Signature:

NINGBO KLS ELECTRONIC CO; LTD

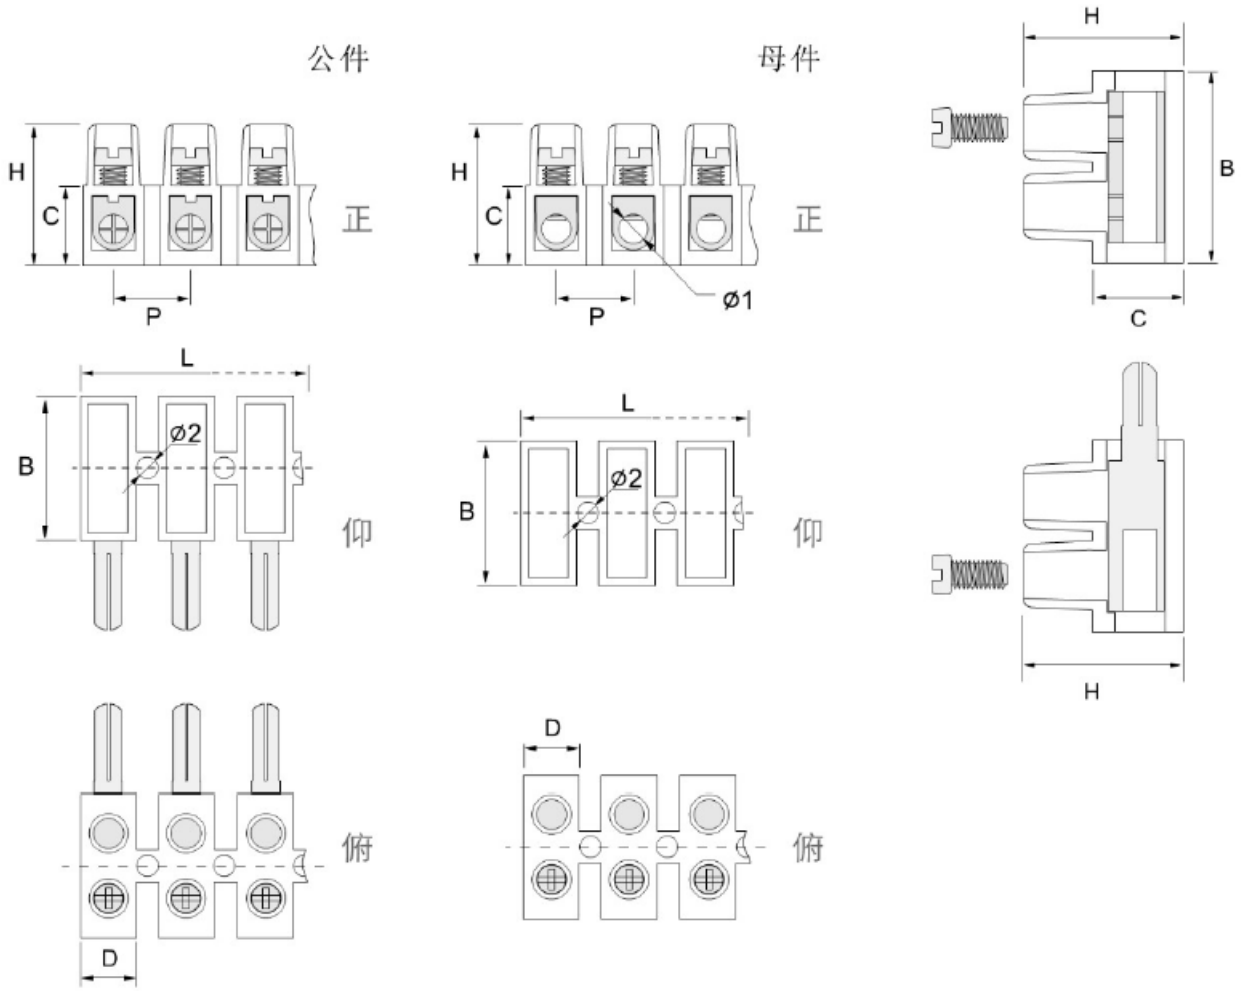
Tel : 0086-574-86828566

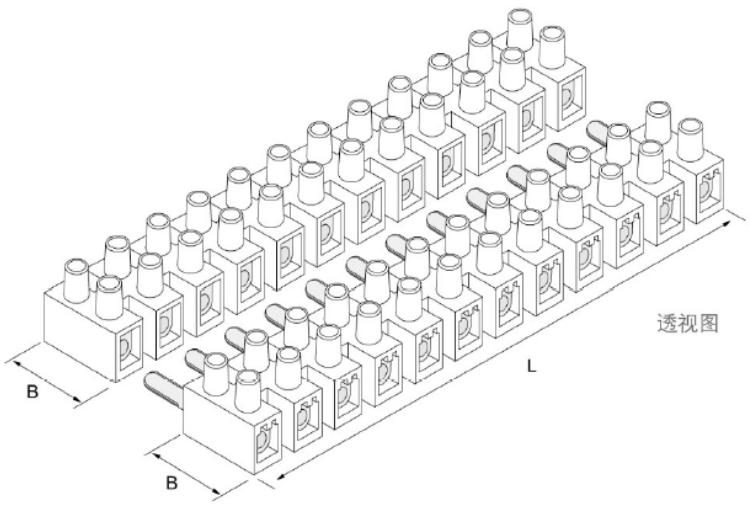
Fax : 0086-574-86824882

ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.

WWW.KLSELE.COM

Compi	Check	Review	Approva
Jenny	Jack.C		


公件
母件
H
C
P
正
ø1
L
B
ø2
仰
D
俯


透视图
L
B
B

SPECIFICATIONS

Number of Poles: 1-12 Poles
Insulation Shell: PA(Nylon)
Conductor: Nickle-plated Copper
Screw: Zinc-plated Steel
Fire Proof: UL94 V-0/V-2
Working temperature: T150°C

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
x: ±1.0mm
x.x: ±0.5mm
x.xx: ±0.2mm
ANG.

Item	Connecting Capacity		Screw	Dimensions							
	mm²	(Cu,Awg)		L	B	H	C	D	Pitch	ø1	ø2
L-KLS2-FT012-10HP-04P-MW	4.0 mm²	11-17 Sol/Str	M 3.0	116.5	20.10	16.30	9.10	6.50	10.00	3.40	3.40