

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS08011	New Version Release	Song	2023-11-03

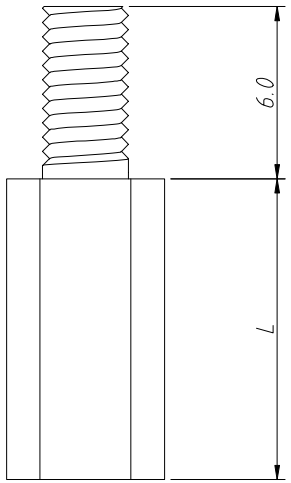

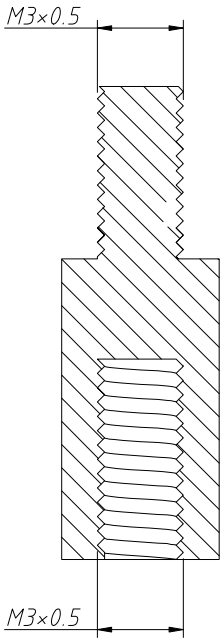

Order Information

L-KLS8-0214-M3-06

RoHS

Length:1~50

Notes:

Material:PA66,UL94V-2,Natural

Operating Temperature:0°C~+80°C

Withstanding Voltage:2500V /0.5mA/1Sec


Temperature Resistance: Class B 130°


(Requires 200° Baking For 30 Minutes Without Melting)

The Appearance Shall Be Free Of Defects Such As Burrs, Burrs,Shrinkage, Etc

This Product Does Not Contain Lead (Pb), Mercury (Hg), Pot (Cd), Hexavalent Inscription (Cr VI)

The Material Used In This Product Has A Water Absorption Of 2.5% After 24 Hours Immersion At A Temperature Of 23 °C And A Relative Humidity Of 50%



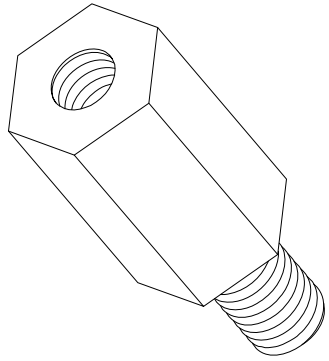

Size	L
Length	1~50

Unmarked	0~4	4~15	15~30	30~50	50~100	100~
Tolerance	±0.15	±0.2	±0.3	±0.5	±0.7	±1.0

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			M3 Hexagonal Isolation Column	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS8-0214-M3-L
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Song	2023-11-03	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2023-11-03	