ULTRASONIC FLOW SENSOR

RWM-1.000-325-2230-13




Electrical Specification

Parameters	Value	Unit
Center Frequency (Fr)	1.0 ±0.1	MHz
Resonance Impedance (R_0)	150 ~ 500	Ω
Static Capacitance (C_P)	1300 ±20%	pF
Withstand Voltage, max	36	V
Operating Temperature (Ta)	0.1 ~ 80	°C
Cable Length (L)*	280	mm

***Other sizes available upon request**

Dimensions

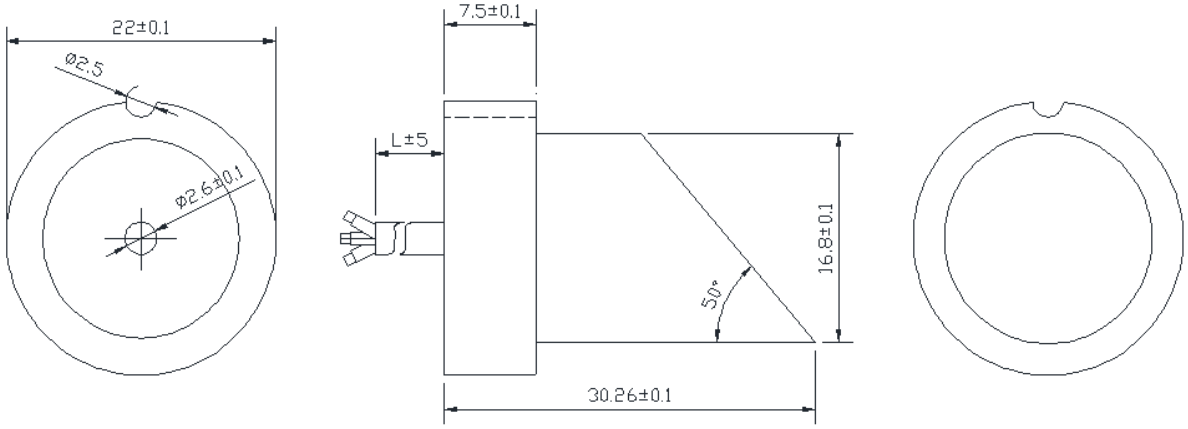

Unit: mm

- **APPROVAL**

DRAWN BY	JS, March 17, 2025
APPROVED BY	CP, March 17, 2025
REVISION	A, Initial Release
	B, AR, March 09, 2026 Updated Operating Temperature
	C, AR, May 22, 2026 Updated the current revision levels

RoHS Compliant

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.

RALTRON ELECTRONICS ▪ 3075 N.W. 107th AVE ▪ Miami, Florida 33172 ▪ U.S.A.
Tel: +1-305-593-6033 ▪ Fax: +1-305-594-3973 ▪ e-mail: sales@raltron.com ▪ internet: http://www.raltron.com