



REV.	CHANGE CONTENT	BY	DATE
A	FIRST ISSUE	SZX	15.7.28
B	改善背光灯灯影及其他边的边缘亮条现象	SZX	15.9.1
C	改为开膜背光	SZX	15.9.23

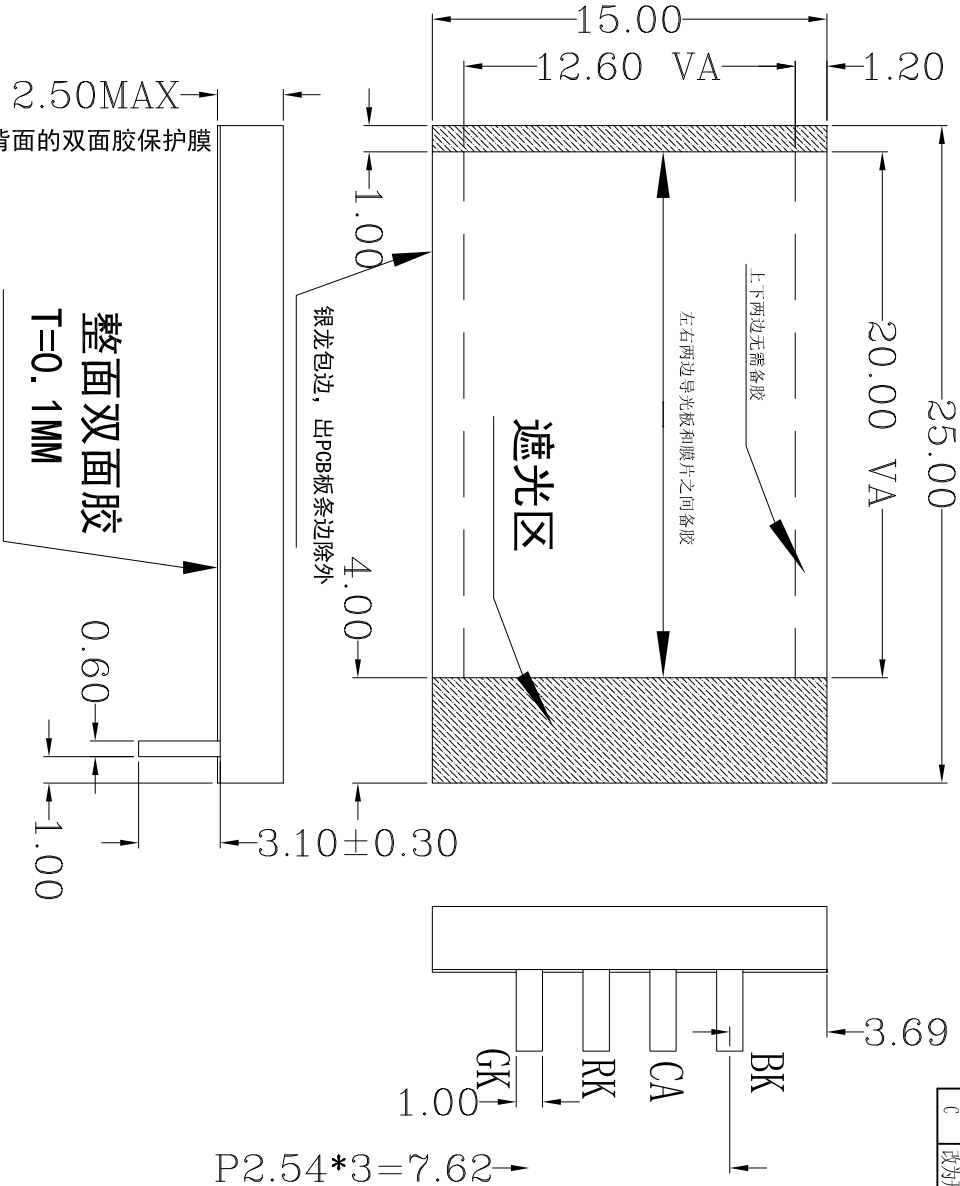

1. ROHS
 2. COLOR:1 RGB LEDs:Material:PC
 3. Operating Temperature Range:-20° C~70° C, Storage Temperature Range:-30° C~80° C,
 4. ALL UNMARKED TOLERANCE: ±0.2mm,
 5. Electrical-Optical Characteristics
- (Unless specified,The Ambient temperature Ta=25°C)

Constant Current Test&Use

项目	Item	符号	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	单位	测定条件 Condition (Ta=25° C)
Forward Current		VF	1.7	1.9	2.1	2.8	3.0	3.2	2.8	3.0	3.2	V	
Dominant Wave Length		λD	620	625	630	515	520	525	465	470	475	nm	
Luminance		Lv	30	40		200	250		20	32		cd/m ²	
Uniformity		AvG	80			80			80			%	
Reverse Current (Per LED)		Ir		20			20			20		uA	



北京海迅华田电子有限公司

DESIGN	SZX	15.7.28		
CHECKED	HY	15.7.28		
APPROVED	WYR	15.7.28		

DRAWING No. : SOOBO2-L

DRAWING TITLE : BACKLIGHT

FILE NO. :

REV. : B

PROJECTION:

SCALE : 1 : 1

UNIT : mm

SHEET : 1/1