
RPSMA-Male To N-Female Adaptor

Part Number: RPSMAM-NF

Specifications	
Part Number	RPSMAM-NF
Contact	RP-SMA Male vs. N Female
Frequency	DC-6GHz
Impedance	50 Ω
Working Voltage	500Vrms Max.
Dielectric Withstanding Voltage	1000Vrms Max.
Insulator Resistance	5000 MegaOhms Min.
VSWR	1.2 Max
IP Ranting	SMA Male IP67









Technical Drawing

Patent Article

REV.	Date	Drawn
A	2018/09/21	Debra



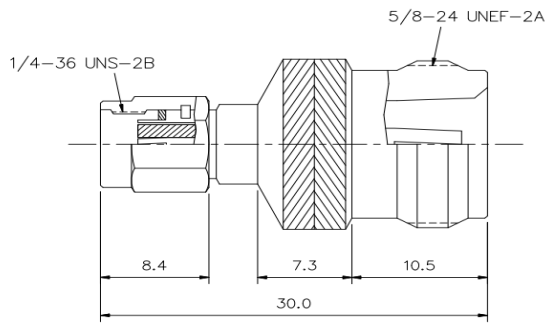

ELECTRICAL PERFORMANCE :

IMPEDANCE : 50 OHMS
FREQUENCY : DC–6.0GHz
WORKING VOLTAGE : 500Vrms MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000Vrms MAX.
INSULATOR RESISTANCE : 5000 MEGOHMS MIN.
VSWR : 1.2 Max.

NO.	DESCRIPTION	MATERIALS	FINISHED
1	BODY	BRASS	Nickel
	CONTACT	P.B.	Gold 5μ"
	INSULATOR	PTFE	
	SHELL	BRASS	Nickel
	C–Ring	Be. Copper	
	GASKET	Silicon	

RoHS COMPLIANCE | Unit : mm | Scale : NTS

TOLERANCE :
X=±0.2 X.X=±0.1 X.XX=±0.05

TITLE :
RP–SMA Male TO N Female

Disclaimer: All images are for reference purposes only

Revised | March 02 2022 (V1)


Important Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed. Satelcom holds the right to change the product specifications without notice.

DMY ELECTRONIC | INVESTMENTS

RPSMA-Male To N-Female Adaptor

Part Number: RPSMAM-NF

Test Report

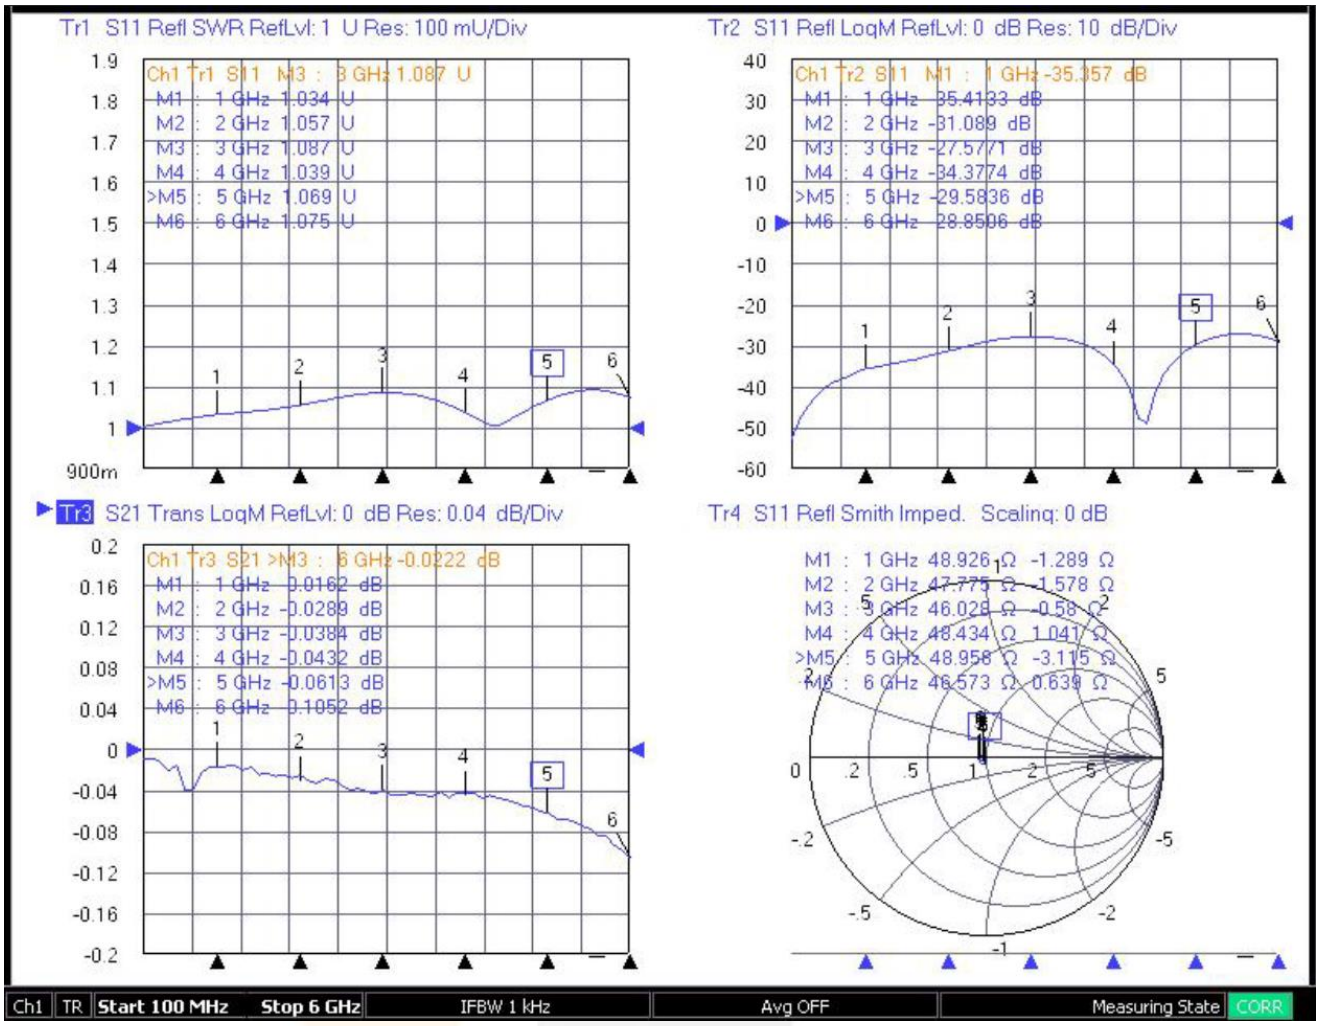

Disclaimer: All images are for reference purposes only

Revised | March 02 2022 (V1)

Important Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed. Satelcom holds the right to change the product specifications without notice.

DMY ELECTRONIC | INVESTMENTS