


SMA-Female To SMA-Female Adaptor

Part Number: SMAF-SMAF


Specifications	
Part Number	SMAF-SMAF
Contact	Female vs. Female
Frequency	DC-10GHz
Impedance	50 Ω
Working Voltage	500Vrms Max.
Dielectric Withstanding Voltage	1000Vrms Max.
Insulator Resistance	5000 MegaOhms Min.
VSWR	1.2 Max
Temp. Range	-65˚C ~ +155˚C
IP Code	IP67
Total Length	22.1mm
Thread Length	14.5mm
Body Finished	Gold
Contact Finished	Gold

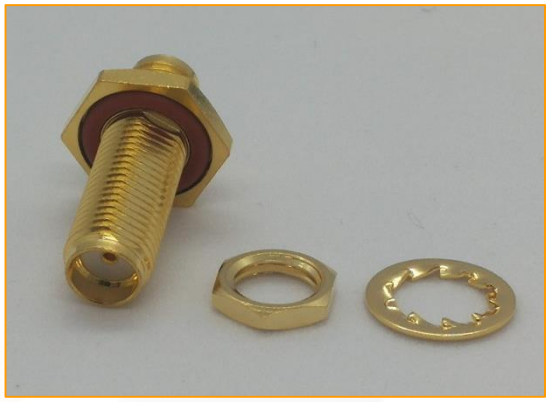





Test Report

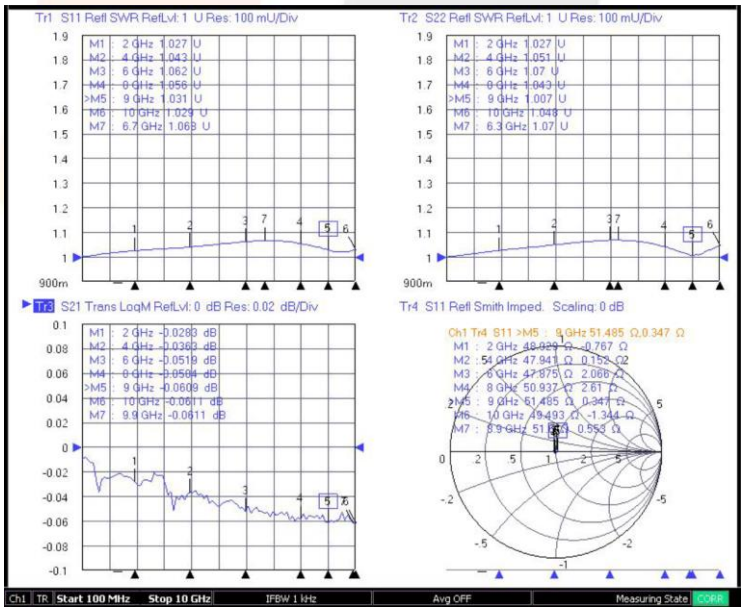

Disclaimer: All images are for reference purposes only

Revised | March 02 2022 (V1)

Important Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed. Satelcom holds the right to change the product specifications without notice.

DMY ELECTRONIC | INVESTMENTS