
SMA-Male To N-Male Adaptor


Part Number: SMAM-NM

Specifications	
Part Number	SMAM-NM
Contact	SMA Male vs. N Male
Frequency	DC-6GHz
Impedance	50 Ω
Working Voltage	1000Vrms Max.
Dielectric Withstanding Voltage	2500Vrms Max.
Insulator Resistance	5000 MegaOhms Min.
VSWR	1.2 Max
IP Rating	SMA Male IP67






SMA (M)



N (M)

Technical Drawing

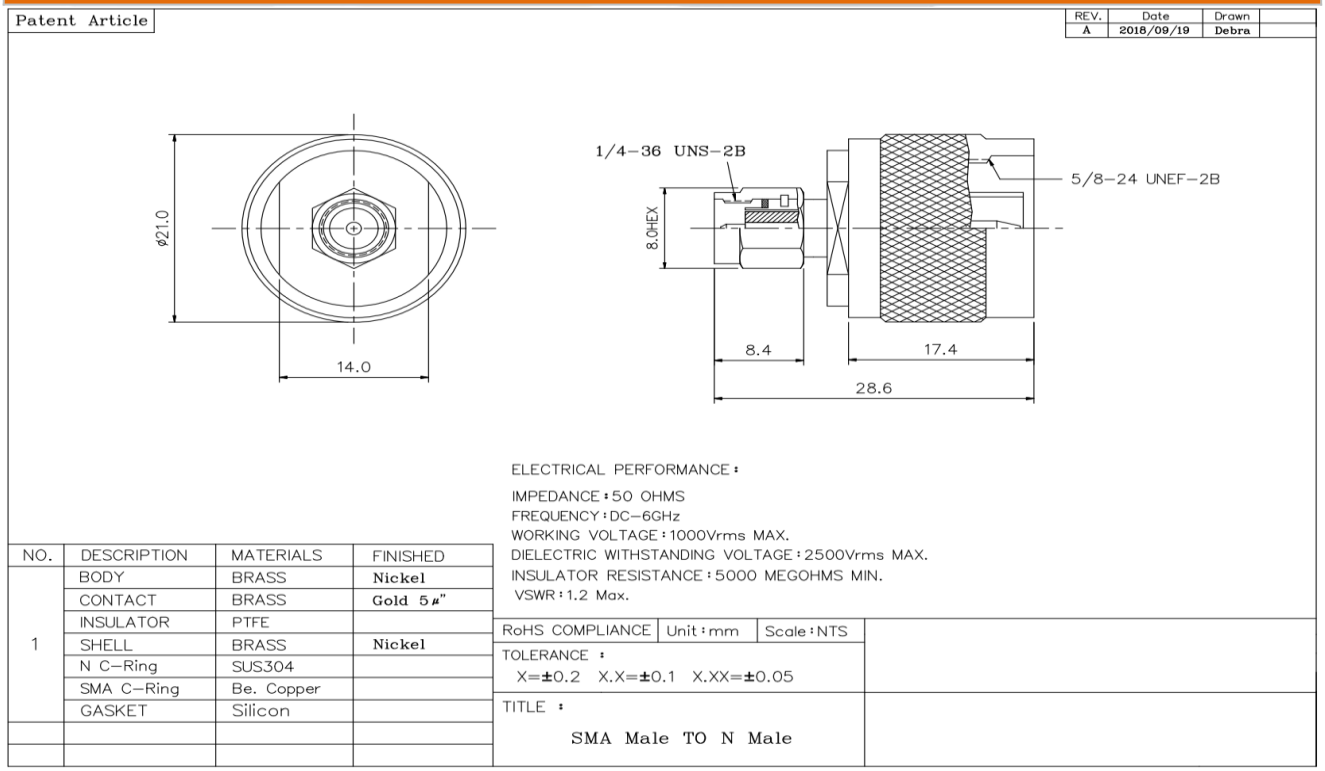

Disclaimer: All images are for reference purposes only

Revised | March 02 2022 (V1)


Important Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed. Satelcom holds the right to change the product specifications without notice.

DMY ELECTRONIC | INVESTMENTS

SMA-Male To N-Male Adaptor

Part Number: SMAM-NM

Test Report

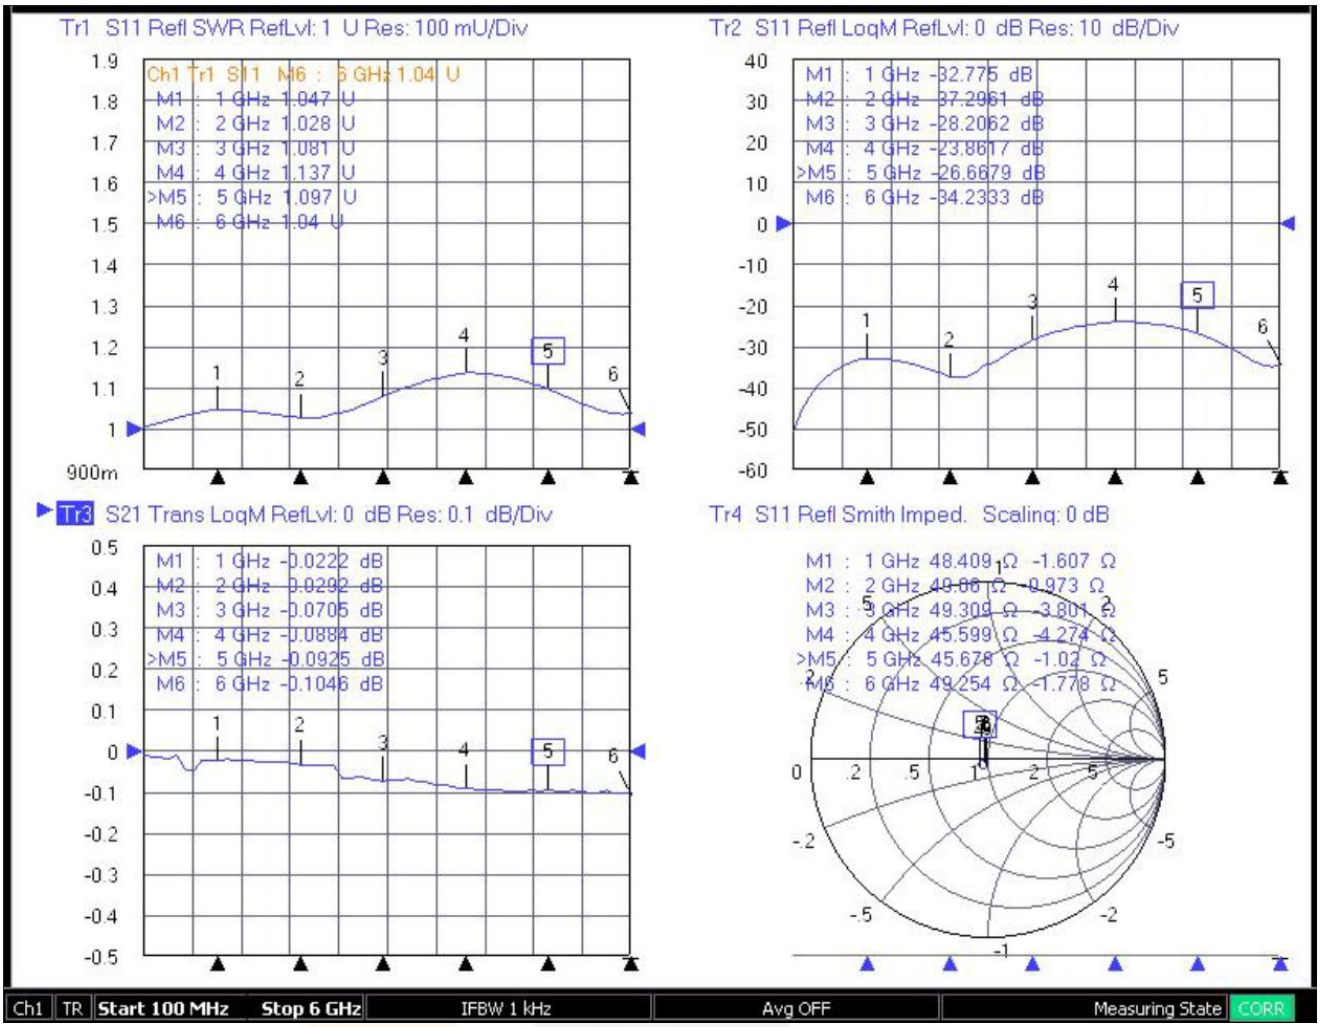

Disclaimer: All images are for reference purposes only

Revised | March 02 2022 (V1)

Important Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed. Satelcom holds the right to change the product specifications without notice.

DMY ELECTRONIC | INVESTMENTS