

DEV-QR-06


Version	content	modifier	date




NUT(H8.0*1.8)_C3604




INTERNAL NENTITION(Ø9.5*0.5)_C3604



SPRING WASHER(Ø8.6*1.2)_C3604



O-RING(color:red)

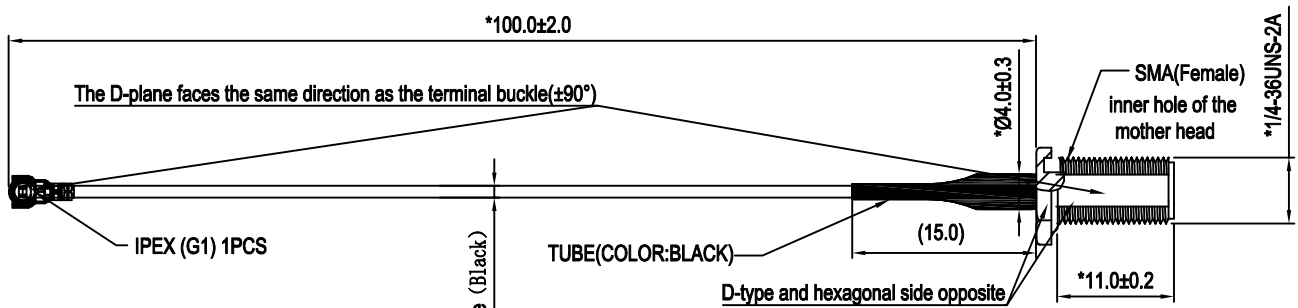

Notes:
1.IPEX connector material:copper alloy; surface treatment:gold plating
2.SMA connector material:C3604;surface treatment:nickel plating;
pin material:P.B. surface treatment:gold plating.
3.cable type:RG1.13;D=Ø1.13mm;color:black.
4. cable performance:
(1).characteristic impedance :50±3Ω.
(2).horizontal force:≥2kg*f.
5.operating temp:-45°C~+85°C /storage temp:-45°C~+105°C.
6.* is key dimension.
7.the appearance of product should be free from
dirt、peeling、scratches and etc..
8.product should satisfy the 《RoHS》 2.0.

SUNNYWAY RF TECHNOLOGY(CHINA)CO.,LTD.			
	PROJECT NAME: SWC009-WP-100	DATE:	2025.06.25
	PART NO.: SW25106IB58	DRAWN:	shaobing
TOLERANCE X.X ±0.25 .XX ±0.20 .XXX±0.05 ANGULAR ∠ ±0.5°	RF:	Tel:	
	PM:	Tel:	
	MATERIAL:	CHECKED:	
	FINISHING:	APPROVED:	
UNIT:mm	COLOUR:	SCALE:FREE	REV:TA