

SWD034

PN: SW24018IB66

Features:

- SMD Compliant
- Impedance 50 Ohm
- Size 7.0 x 2.0 x 2.0 mm



Applications:

- Portable devices
- Remote monitoring
- Asset tracker
- Wearable devices
- Others

1. Introduction	3
2. Specification	4
3. Antenna Characteristics	5
4. Matching circuit	8
5. Antenna Drawings	9
Changelog	10

Sunnyway RF reserves the right to change specifications and product descriptions.

Sunnyway RF reserves all rights to this document and the information contained herein. reproduction, use or disclosure to third parties without express permission is strictly prohibited.

1. Introduction



The Sunnyway RF SWD034 is a low profile SMD embedded antenna designed for direct SMD mount on a device PCB. It provides high efficiency in a very small factor 7.0*2.0*2.0mm.

Its rectangular shape and small size make it very easy to integrate - it is packaged in tape and reel, and solder can be directly reflowed to the edge of PCB by picking and placing. This antenna is recommended for long ground planes of 110 mm or longer to obtain the highest rated efficiency.

Typical applications:

- Portable devices
- Wearable devices
- Others


2. Specification

Frequency range(MHz)	850~880	902~928
Peak Gain (dBi)	2.39~3.44	3.65~4.17
Average Gain (dB)	-3.19~-2.19	-3.08~-2.45
VSWR	< 2.0	< 2.0
Return Loss	< -10	< -10
Efficiency (%)	47.98~60.36%	49.25~56.9%
Polarization mode	Linear	
Radiation pattern	Omni-Directional	
Output impedance (Ω)	50	
Max. Input Power(W)	5	


Mechanical	
Mounting Type	SMD
Antenna size(mm)	7.0(L) x 2.0(W) x 2.0(H)
Material	PCB
Environmental	
Operating Temperature (°C)	- 40 °C ~ + 85 °C
Storage Temperature(°C)	- 40 °C ~ + 85 °C


3. Antenna Characteristics










3.1 VSWR and Return Loss

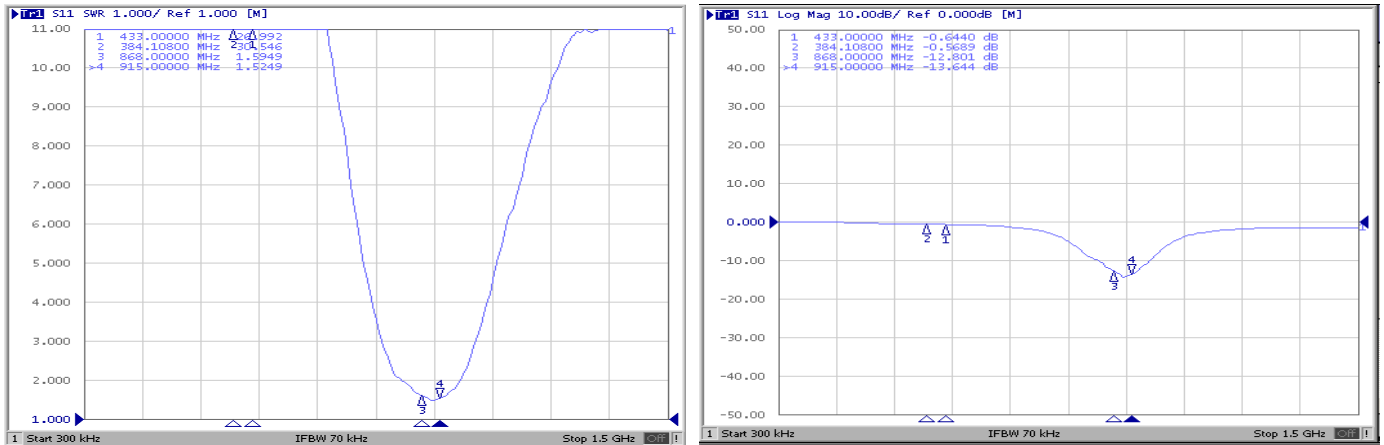

3.2 Efficiency and Gain

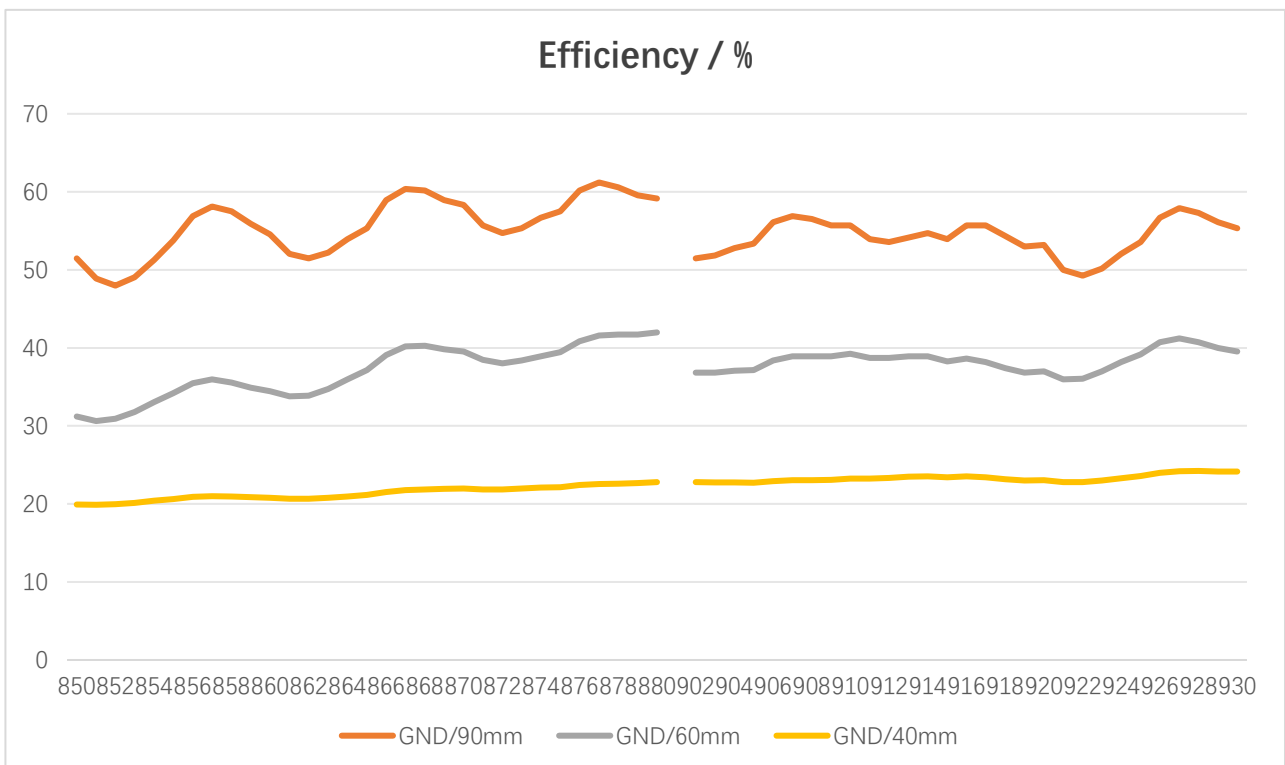

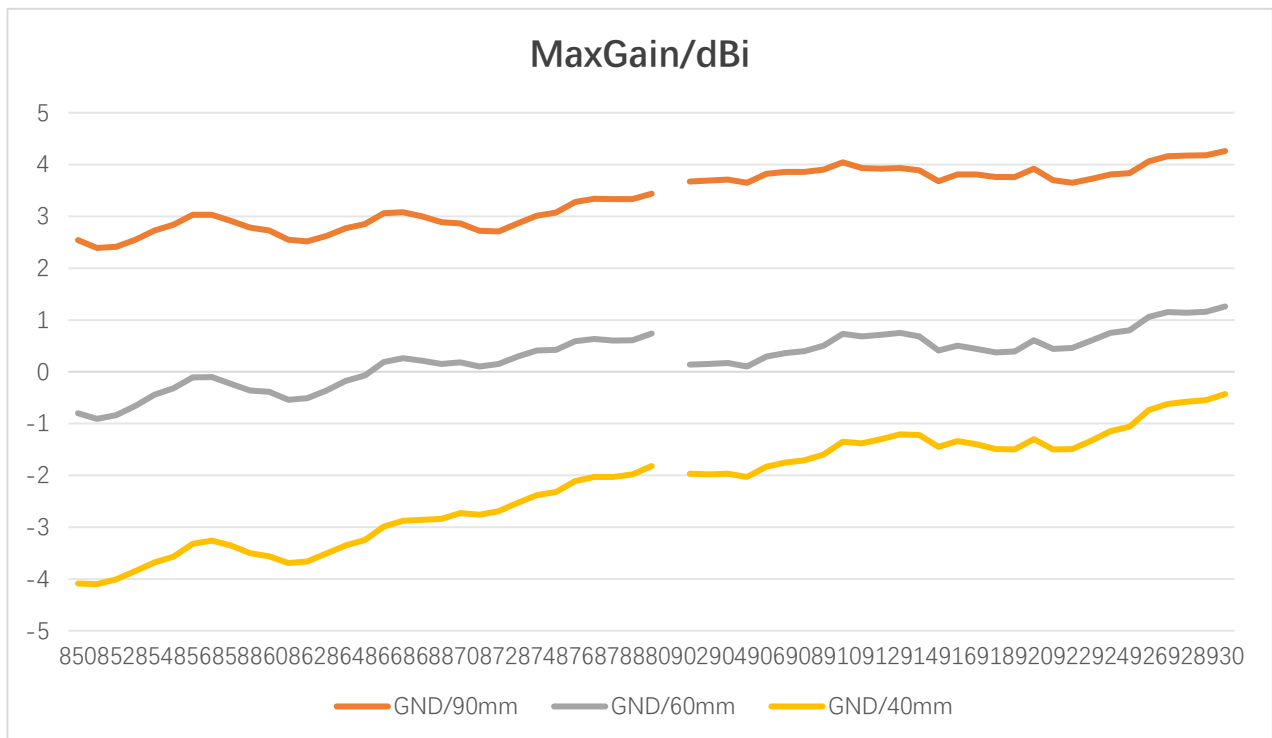


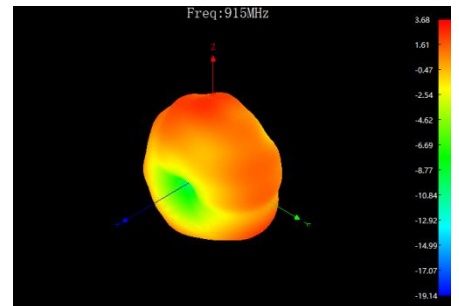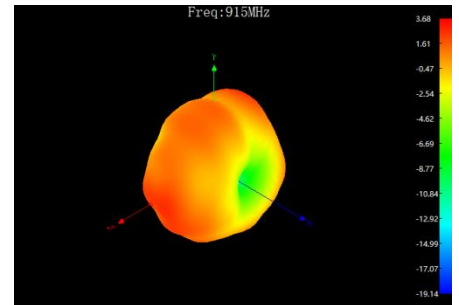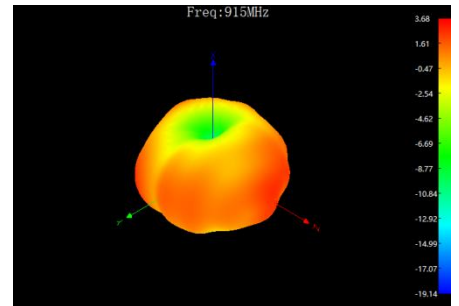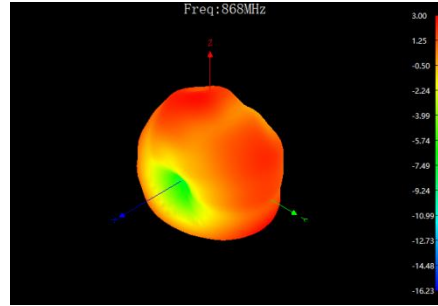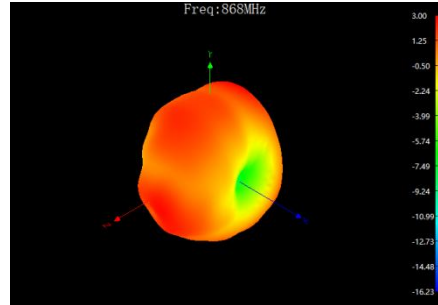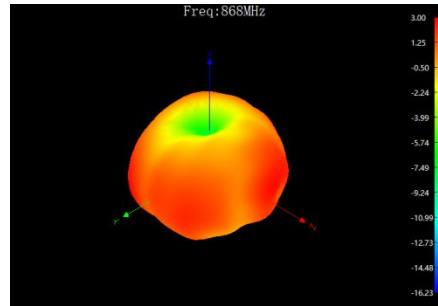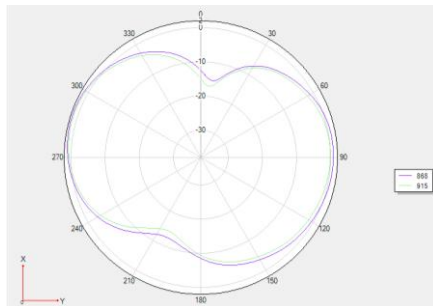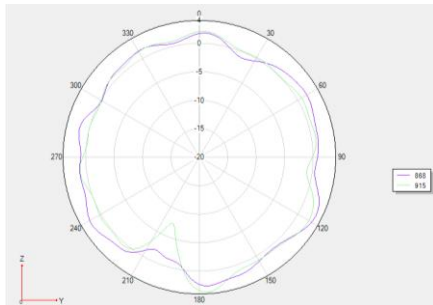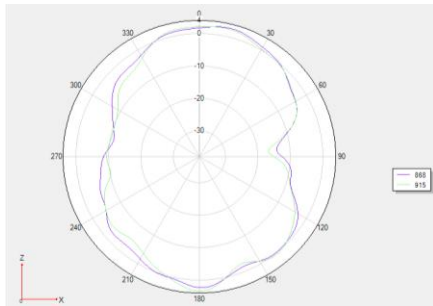

4. Matching Circuit

The antenna requires a matching circuit that must be optimized for each product. The matching circuit will require up to three components and the following circuit should be designed into the host PCB. Not all components may be required but should be included as a precaution.


The matching network must be placed close to the antenna feed to ensure it is more effective in tuning the antenna.

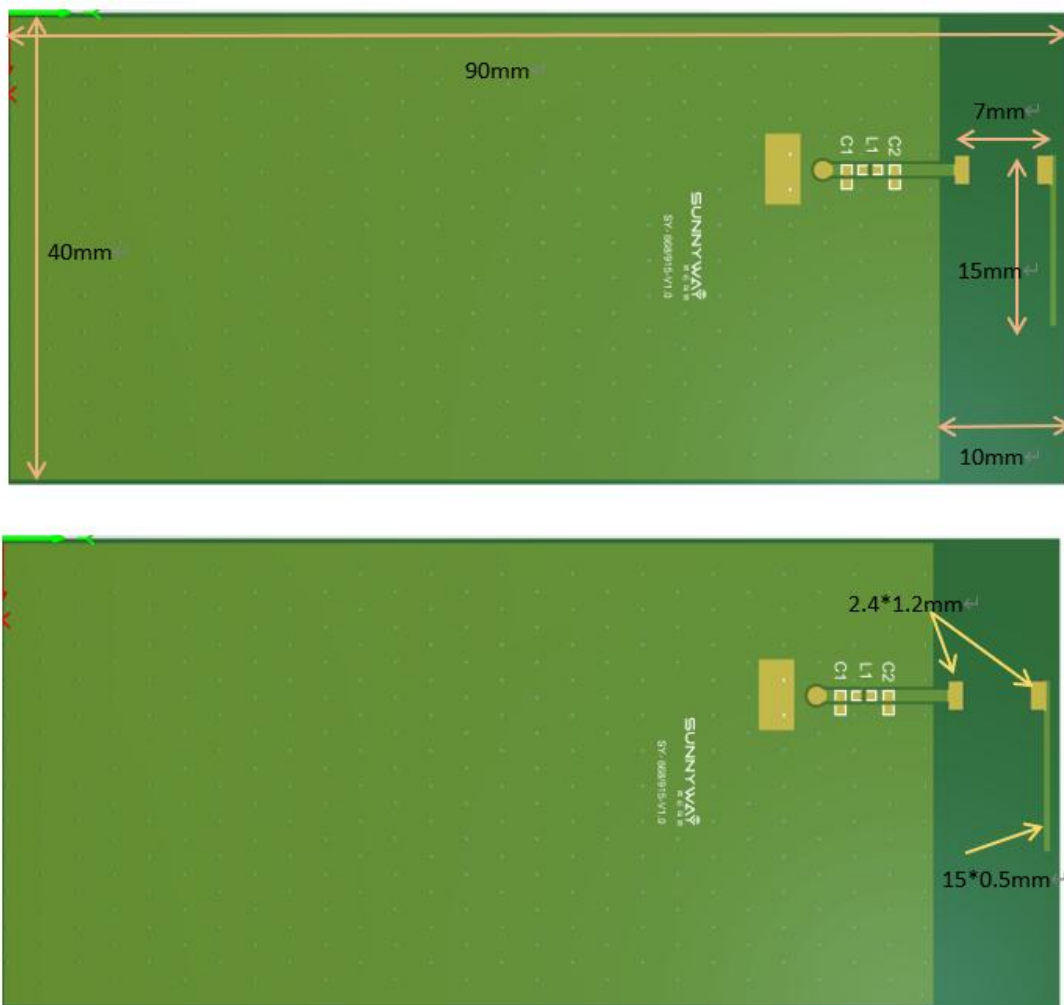

Component	Type	Value
C2	N/A	N/A
L1	Inductance	8.2nH
C1	N/A	N/A

5. Antenna Drawing

Unit: mm

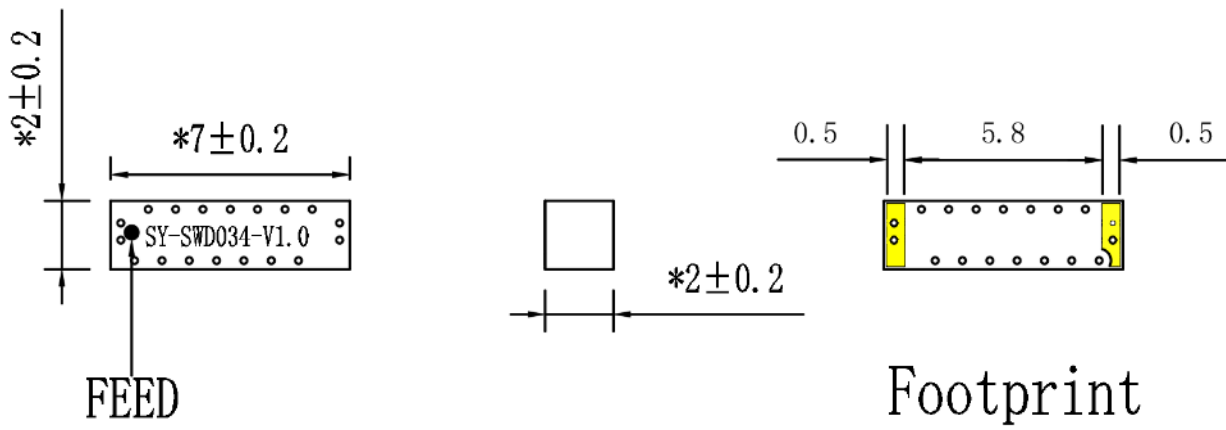

Changelog for the datasheet			
Revision	Date	Author:	Notes:
-	2023-08-11	Kevin LV	Initial Datasheet Release
V0	2025-05-29	Kevin LV	Update text formatting, titles, fonts, etc