



FOR-1351 Rev.1.0


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

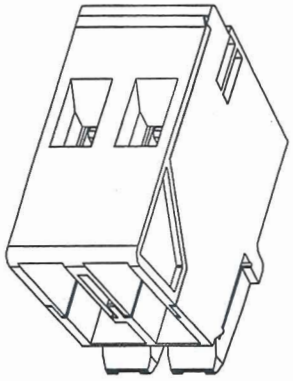

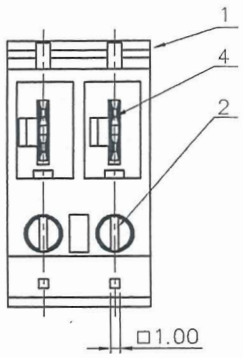



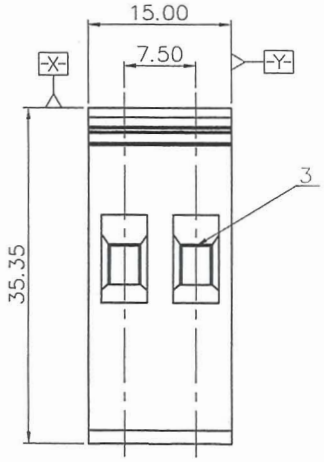

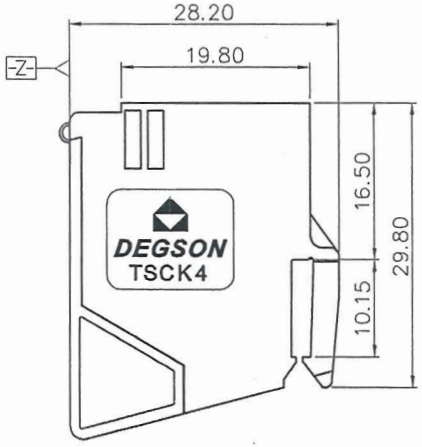

NOTES1:
UL Standard
1.Rated Voltage/Current : 600V / 30A
2.Torque Value : M3 , 4.43Lb.in
3.Wire Range : 30~10AWG

IEC Standard
1.Rated Voltage/Current : 800V / 32A
2.Torque Value : M3 , 0.5N.m
3.Wire Range : 0.2~4.0mm^2

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 7.5mm, Poles : N=02P
3.Stripping length : 10mm
4.Withstanding Voltage : AC3500V/1Min.
5.Operating temperature: -40°C~+105°C
6.Standard color number: PANTONE 158u
7.Undimensioned Tolerances:

Pitch Range In mm			Nominal Dimension Range In mm					— ⌒ ⌓
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

8.RoHS Compliance

文管中心 研发专用 2015 02 (仅限内部使用,对外无效)

ITEM	NAME OF PART	MATERIAL	NOTES
4	SOLDER PIN	COPPER ALLOY	Sn Plated
3	CAGE	COPPER ALLOY	M3/Ni Plated
2	SCREW	COPPER ALLOY	M3/Ni Plated
1	HOUSING	PA66	UL94V-0

DETACHED LISTS

PART NO.: /

APPD: Aaron 10/31-15

CHKD: Kim 10/30/15

DRFT: XHY 07/16/15"

THIRD ANGLE PROJECTION

DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD

NAME: TSCK4-02P-15-01A(H)

TITLE: CUSTOMER DRAWING | REV: TO

DRAWING NO.: TSCK4-C02 | SHEET: 1/

MM (INCH) | DO NOT SCALE DRAWING | SCALE: 1/1