LCD / LCM SPECIFICATION



WINSTAR Display Co.,Ltd.

華凌光電股份有限公司

Winstar Display Co., LTD
華凌光電股份有限公司
WEB: https://www.winstar.com.tw E-mail: sales@winstar.com.tw

SPECIFICATION

CUSTOMER : _____

MODULE NO.: WO24064C-YFH#

APPROVED BY: (FOR CUSTOMER USE ONLY)	**PCB VERSION:** **DATA:**

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY

VERSION	DATE	REVISED PAGE NO.	SUMMARY
I	2024/11/14		Modify the recommended soldering temperature

WINSTAR DISPLAY Co., Ltd.

Winstar Display Co.,

華凌光電股份有限公司

MODLE NO：

RECORDS OF REVISION

DOC. FIRST ISSUE

VERSION	DATE	REVISED PAGE NO.	**SUMMARY**
0	2014/12/30		First issue
A	2015/02/02		Add Pull tape.
B	2016/01/27		Modify Precautions in use of LCD Modules & Static electricity test
C	2016/11/21		Add FPC bending rule
D	2017/09/05		Modify Idd.
E	2019/08/27		Modify Material List of Components for RoHs
F	2019/12/17		Modify Precautions in use of LCD Modules
G	2020/12/30		Add Interface
H	2023/02/07		Modify B/L information
I	2024/11/14		Modify the recommended soldering temperature

WINSTAR DISPLAY Co., Ltd.

Contents

1.Module Classification Information

2.Precautions in use of LCD Modules

3.General Specification

4.Absolute Maximum Ratings

5.Electrical Characteristics

6.Optical Characteristics

7.Interface Pin Function

8.Contour Drawing &Block Diagram

9.Reliability

10.Backlight Information

11.Inspection specification

12.Material List of Components for RoHs

13.Recommendable Storage

WINSTAR DISPLAY Co., Ltd.

1.Module Classification Information

W	O	24064	C	–	Y	F	H	–	#
①	②	③	④		⑤	⑥	⑦		⑧

① Brand：WINSTAR DISPLAY CORPORATION

② Display Type：H→Character Type, G→Graphic Type , X→TAB Type, O→COG Type

③ Display Font： 240 * 64 dot

④ Model serials no.

⑤ Backlight Type：

N→Without backlight	T→LED, White	L→LED, Full color
B→EL, Blue green	A→LED, Amber	J→DIP LED,Blue
D→EL, Green	R→LED, Red	K→DIP LED,White
W→EL, White	O→LED, Orange	E→DIP LED, Yellow Green
M→EL, Yellow Green	G→LED, Green	H→DIP LED,Amber
F→CCFL, White	P→LED, Blue	I→DIP LED, Red
Y→LED, Yellow Green	X→LED, Dual color	
G→LED, Green	C→LED, Full color	

⑥ LCD Mode：

B→TN Positive, Gray	V→FSTN Negative, Blue
N→TN Negative,	T→FSTN Negative, Black
L→VA Negative	D→FSTN Negative (Double film)
H→ HTN Positive, Gray	F→FSTN Positive
I→HTN Negative, Black	K→FSC Negative
U→HTN Negative, Blue	S→FSC Positive
M→STN Negative, Blue	E→ISTN Negative, Black
G→STN Positive, Gray	C→CSTN Negative, Black
Y→STN Positive, Yellow Green	A→ASTN Negative, Black

⑦ LCD Polarize Type/ Temperature range/ View direction

A→Reflective, N.T, 6:00	H→Transflective, W.T,6:00
D→Reflective, N.T, 12:00	K→Transflective, W.T,12:00
G→Reflective, W. T, 6:00	C→Transmissive, N.T,6:00
J→Reflective, W. T, 12:00	F→Transmissive, N.T,12:00
B→Transflective, N.T,6:00	I→Transmissive, W. T, 6:00
E→Transflective, N.T.12:00	L→Transmissive, W.T,12:00

⑧ Special Code #: Fit in with the ROHS Directions and regulations

WINSTAR DISPLAY Co.,Ltd.

2.Precautions in use of LCD Modules

(1)Avoid applying excessive shocks to the module or making any alterations or modifications to it.

(2)Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD module.

(3)Don't disassemble the LCM.

(4)Don't operate it above the absolute maximum rating.

(5)Don't drop, bend or twist LCM.

(6)Soldering: only to the I/O terminals.


(7)Storage: please storage in anti-static electricity container and clean environment.

(8) Winstar have the right to change the passive components, including R3,R6 & backlight adjust resistors. (Resistors,capacitors and other passive components will have different appearance and color caused by the different supplier.)

(9)Winstar have the right to change the PCB Rev. (In order to satisfy the supplying stability, management optimization and the best product performance...etc, under the premise of not affecting the electrical characteristics and external dimensions, Winstar have the right to modify the version.)

(10) To ensure the stability of the display screen, please apply screen saver after showing 30 mins of fixed display content.

(11) The limitation of FPC bending

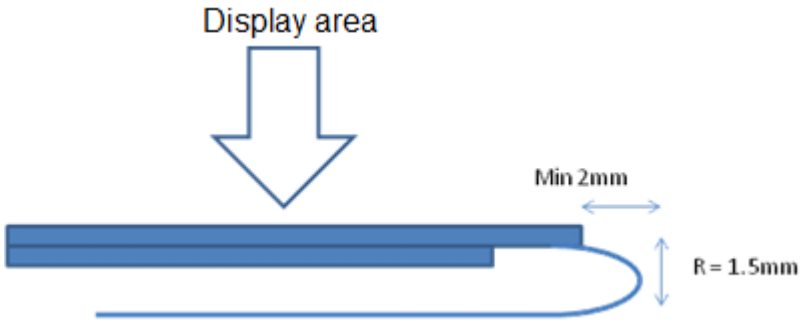

(12)Please heat up a little the tape sticking on the components when removing it; otherwise the components might be damaged.

WINSTAR DISPLAY Co., Ltd.

3.General Specification

Item	Dimension	Unit
Number of dots	240 x 64	—
Module dimension	111.4 x 45.5 x 5.6	mm
View area	106.2 x 31.2	mm
Active area	103.17 x 27.49	mm
Dot size	0.40 x 0.40	mm
Dot pitch	0.43 x 0.43	mm
LCD type	FSTN Positive Transflective (In LCD production, It will occur slightly color difference. We can only guarantee the same color in the same batch.)	
Duty	1/64	
View direction	6 o'clock	
Backlight Type	LED, Yellow Green	
IC	ST7586S	
Interface	68 series /80 series/3-Line/4-Line	

WINSTAR DISPLAY Co., Ltd.

4.Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	T_{OP}	-20	—	+70	℃
Storage Temperature	T_{ST}	-30	—	+80	℃
Digital Power Supply Voltage	VDDI	-0.3	—	3.6	V
Analog Power supply voltage	VDDA	-0.3	—	3.6	V
LCD Power supply voltage	V0-XV0	-0.3	—	19	V
LCD Power supply voltage	VG	-0.3	—	5.5	V

WINSTAR DISPLAY Co., Ltd.

5.Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For Logic	V_{DD}-V_{SS}	—	3.0	3.3	3.4	V
Supply Voltage For LCM	V0-XV0	Ta=-20℃ Ta=25℃ Ta=+70℃	— 9.8 —	— 10.0 —	— 10.2 —	V V V
Input High Volt.	V_{IH}	—	0.7V_{DD}	—	V_{DD}	V
Input Low Volt.	V_{IL}	—	Vss	—	0.3 V_{DD}	V
Output High Volt.	V_{OH}	—	0.8 V_{DD}	—	V_{DD}	V
Output Low Volt.	V_{OL}	—	Vss	—	0.2V_{DD}	V
Supply Current(No include LED Backlight)	I_{DD}	V_{DD}=3.3V	0.1	1.5	3.0	mA


Please kindly consider to design the Vop to be adjustable while programing the software to match LCD contrast tolerance.


WINSTAR DISPLAY Co., Ltd.

6.Optical Characteristics


Item	Symbol	Condition	Min	Typ	Max	Unit
View Angle	θ	CR≧2	0	—	30	ϕ = 180°
	θ	CR≧2	0	—	60	ϕ = 0°
	θ	CR≧2	0	—	45	ϕ = 90°
	θ	CR≧2	0	—	45	ϕ = 270°
Contrast Ratio	CR	—	—	5	—	—
Response Time	T rise	—	—	200	300	ms
	T fall	—	—	250	350	ms


Definition of Operation Voltage (Vop)

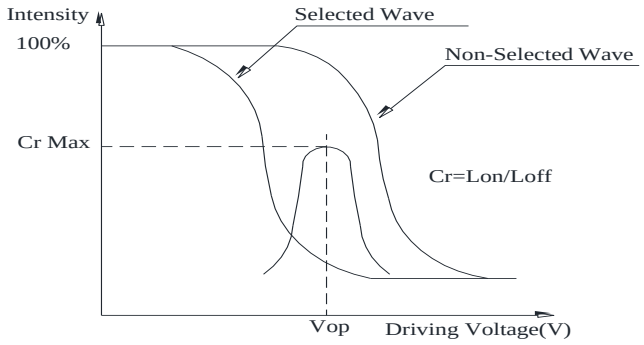

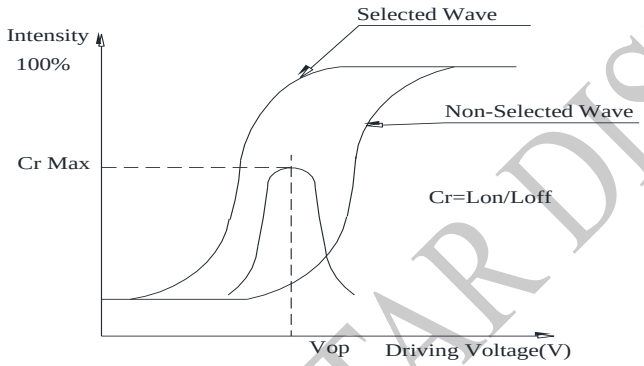

Definition of Response Time (Tr , Tf)

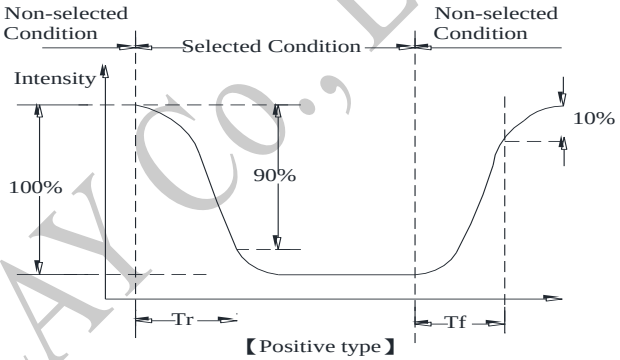

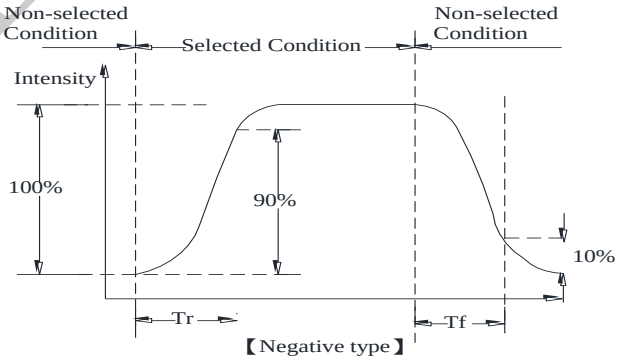


Conditions :

Operating Voltage : Vop　　Viewing Angle(θ ， φ) : 0°， 0°

Frame Frequency : 64 HZ　　Driving Waveform : 1/N duty , 1/a bias

Definition of viewing angle(CR≧2)

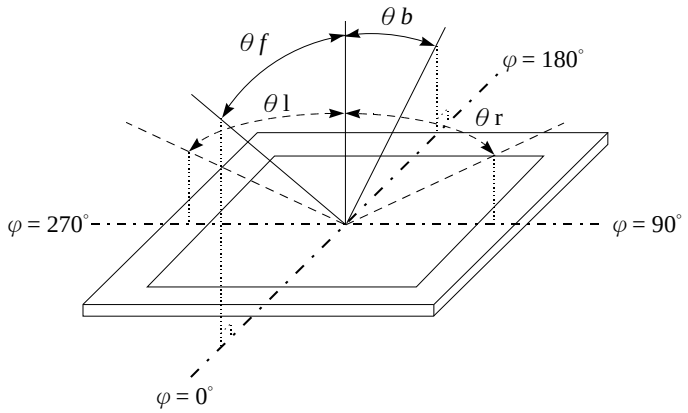

WINSTAR DISPLAY Co., Ltd.

7.Interface Pin Function


<table>
<tr><th>Pin No.</th><th>Symbol</th><th>I/O</th><th>Description</th></tr>
<tr><td>1</td><td>VG</td><td>P</td><td>VG is the power of SEG-drivers.</td></tr>
<tr><td>2</td><td>XV0</td><td>P</td><td>Negative operating voltage of COM-drivers.</td></tr>
<tr><td>3</td><td>V0</td><td>P</td><td>Positive operating voltage of COM-drivers.
V0O is the output of the positive Vop generator.
V0I is the positive Vop supply of LCD drivers.
V0S is the sensor of the positive Vop generator.
V0O, V0I & V0S should be separated on ITO and be connected together by FPC.</td></tr>
<tr><td>4</td><td>VM</td><td>P</td><td>VM is the non-select voltage level of COM-drivers.</td></tr>
<tr><td>5</td><td>VDDA</td><td>P</td><td>Analog power for internal booster.</td></tr>
<tr><td>6</td><td>VSS</td><td>P</td><td>Ground</td></tr>
<tr><td>7</td><td>VD1</td><td>P</td><td>VD1I is the power source of digital circuits.</td></tr>
<tr><td>8</td><td>VDDI</td><td>P</td><td>Power of interface I/O circuit.</td></tr>
<tr><td>9</td><td>CSB</td><td>Input</td><td>Chip select input pin.
CSB=“L”: This chip is selected and the MPU interface is active.</td></tr>
<tr><td>10
11
12</td><td>IF3
IF2
IF1</td><td>Input</td><td>These pins select interface operation mode.
<table>
<tr><th>IF3</th><th>IF2</th><th>IF1</th><th>MPU interface type</th></tr>
<tr><td>H</td><td>H</td><td>L</td><td>80 series 8-bit parallel</td></tr>
<tr><td>H</td><td>L</td><td>L</td><td>68 series 8-bit parallel</td></tr>
<tr><td>L</td><td>H</td><td>H</td><td>8-bit serial (4-Line)</td></tr>
<tr><td>L</td><td>H</td><td>L</td><td>9-bit serial (3-Line)</td></tr>
</table>
Note: Refer to “Interface Selection” for detailed information.</td></tr>
<tr><td>13</td><td>RSTB</td><td>Input</td><td>Reset input pin. When RSTB is “L”, internal initialization procedure is executed.</td></tr>
<tr><td>14</td><td>/RD(E)</td><td>Input</td><td>Read / Write execution control pin. (This pin is only used in parallel interface)</td></tr>
<tr><td>15
16
17
18
19
20
21
22</td><td>D7
D6
D5
D4
D3
D2
D1
D0</td><td>I/O</td><td>The bi-directional data bus of the MPU interface. When CSB is “H”, they are high impedance.
If using serial interface:
D0 is the SDA signal in 4-Line & 3-Line interface.
D1 is the A0 signal in 4-Line interface</td></tr>
<tr><td>23</td><td>NC</td><td></td><td>No connection</td></tr>
</table>

WINSTAR DISPLAY Co., Ltd.

24	/WR(R/W)	Input	Read / Write execution control pin. (This pin is only used in parallel interface)
25	A0(SCL)	Input	The function of this pin is different in parallel and serial interface. In parallel interface: A0 is register selection input.
26	VSS	P	Ground

WINSTAR DISPLAY Co., Ltd.

8.Contour Drawing

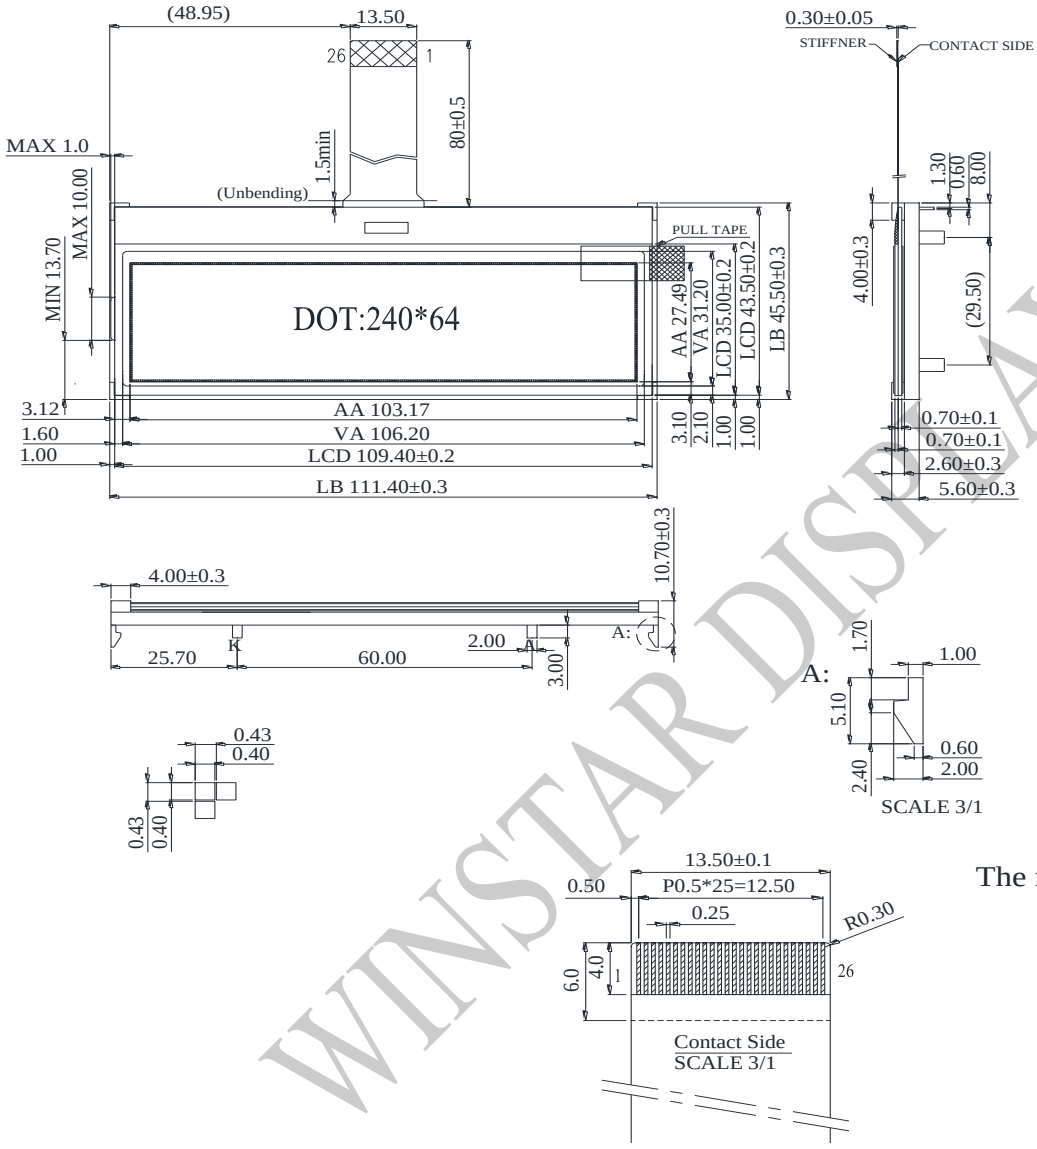


PIN NO.	SYMBOL	PIN NO.	SYMBOL	PIN NO.	SYMBOL
1	VG	10	IF3	19	D3
2	XV0	11	IF2	20	D2
3	V0	12	IF1	21	D1
4	VM	13	RSTB	22	D0
5	VDDA	14	/RD(E)	23	NC
6	VSS	15	D7	24	/WR(R/W)
7	VD1	16	D6	25	A0(SCL)
8	VDDI	17	D5	26	VSS
9	CSB	18	D4		

The non-specified tolerance of dimension is ±0.3 mm .

WINSTAR DISPLAY Co., Ltd.

Application schematic

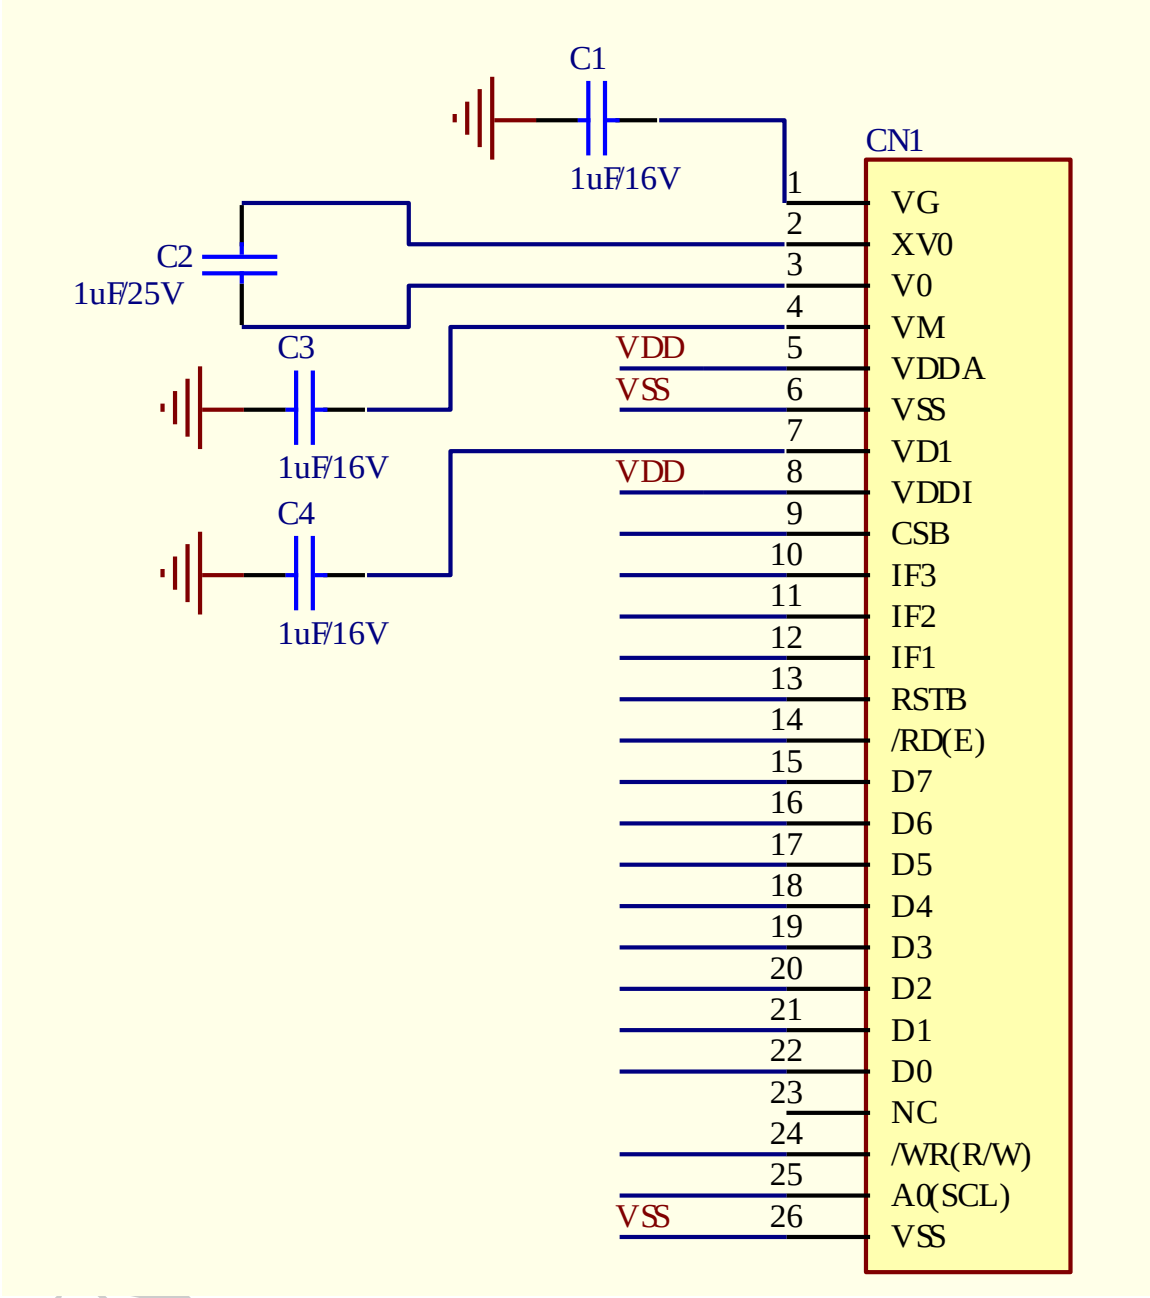

9.Reliability

Content of Reliability Test (Wide temperature, -20℃~70℃)

Environmental Test			
Test Item	**Content of Test**	**Test Condition**	**Note**
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80℃ 200hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30℃ 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70℃ 200hrs	— —
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20℃ 200hrs	1
High Temperature/ Humidity storage	The module should be allowed to stand at 60℃,90%RH max For 96hrs under no-load condition excluding the polarizer, Then taking it out and drying it at normal temperature.	60℃,90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation -20℃ 25℃ 70℃  30min 5min 30min 1 cycle	-20℃/70℃ 10 cycles	— —
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=±600V(contact), ±800v(air), RS=330Ω CS=150pF 10 times	— —

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

WINSTAR DISPLAY Co., Ltd.


10.Backlight Information

Specification

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Supply Current	ILED	—	120	144	mA	V=3.5V
Supply Voltage	V	3.3	3.5	3.7	V	—
Reverse Voltage	VR	—	—	3.0	V	—
Luminance (Without LCD)	IV	920	1150	—	cd/m^2	ILED=120mA
Wave Length	λp	569	572	575	nm	ILED=120mA
Life Time	—	—	50000	—	Hr.	ILED≦120mA 25℃,50-60%RH
Color	Yellow Green					


Note: A backlight driven by voltage will keep the drive current under the safe area (current between minimum and maximum).


If the B/L LED is driven by current only, the drive voltage cannot be considered as a reference value.

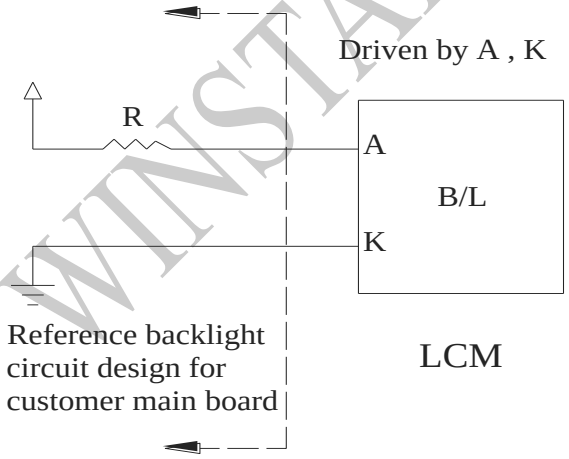

WINSTAR DISPLAY Co., Ltd.

11.Inspection specification


<table>
<tr><th>No</th><th>Item</th><th>Criterion</th><th>AQL</th></tr>
<tr><td>01</td><td>Electrical Testing</td><td>Missing vertical, horizontal segment, segment contrast defect.
Missing character , dot or icon.
Display malfunction.
No function or no display.
Current consumption exceeds product specifications.
LCD viewing angle defect.
Mixed product types.
Contrast defect.</td><td>0.65</td></tr>
<tr><td>02</td><td>Black or white spots on LCD (display only)</td><td>2.1 White and black spots on display ≦0.25mm, no more than three white or black spots present.
2.2 Densely spaced: No more than two spots or lines within 3mm</td><td>2.5</td></tr>
<tr><td rowspan="2">03</td><td rowspan="2">LCD black spots, white spots, contamination (non-display)</td><td>3.1 Round type : As following drawing
Φ=(x + y) / 2


<table>
<tr><th>Size</th><th>Acceptable QTY</th></tr>
<tr><td>Φ≦0.10</td><td>Accept no dense</td></tr>
<tr><td>0.10＜Φ≦0.20</td><td>2</td></tr>
<tr><td>0.20＜Φ≦0.25</td><td>1</td></tr>
<tr><td>0.25＜Φ</td><td>0</td></tr>
</table></td><td>2.5</td></tr>
<tr><td>3.2 Line type : (As following drawing)


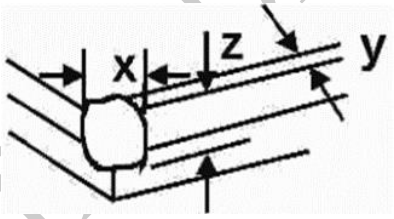
<table>
<tr><th>Length</th><th>Width</th><th>Acceptable Q TY</th></tr>
<tr><td>---</td><td>W≦0.02</td><td>Accept no dense</td></tr>
<tr><td>L≦3.0</td><td>0.02＜W≦0.03</td><td rowspan="2">2</td></tr>
<tr><td>L≦2.5</td><td>0.03＜W≦0.05</td></tr>
<tr><td>---</td><td>0.05＜W</td><td>As round type</td></tr>
</table></td><td>2.5</td></tr>
<tr><td>04</td><td>Polarizer bubbles</td><td>If bubbles are visible, judge using black spot specifications, not easy to find, must check in specify direction.
<table>
<tr><th>Size Φ</th><th>Acceptable Q TY</th></tr>
<tr><td>Φ≦0.20</td><td>Accept no dense</td></tr>
<tr><td>0.20＜Φ≦0.50</td><td>3</td></tr>
<tr><td>0.50＜Φ≦1.00</td><td>2</td></tr>
<tr><td>1.00＜Φ</td><td>0</td></tr>
<tr><td>Total Q TY</td><td>3</td></tr>
</table></td><td>2.5</td></tr>
</table>

WINSTAR DISPLAY Co.,Ltd.

<table>
<tr><th>No</th><th>Item</th><th>Criterion</th><th>AQL</th></tr>
<tr><td>05</td><td>Scratches</td><td>Follow NO.3 LCD black spots, white spots, contamination</td><td></td></tr>
<tr><td>06</td><td>Chipped glass</td><td>Symbols Define:
x: Chip length y: Chip width z: Chip thickness
k: Seal width t: Glass thickness a: LCD side length
L: Electrode pad length:

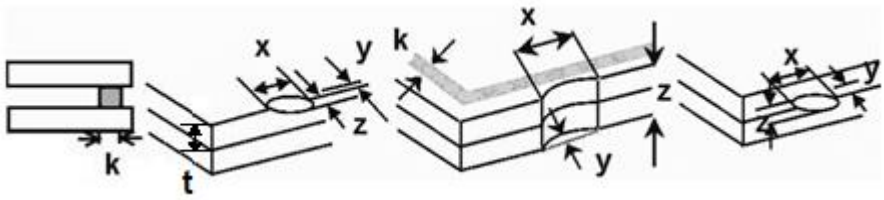
6.1 General glass chip :
6.1.1 Chip on panel surface and crack between panels:


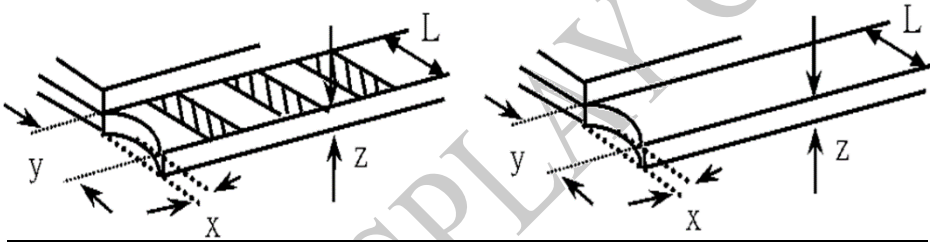
<table><tr><th>z: Chip thickness</th><th>y: Chip width</th><th>x: Chip length</th></tr><tr><td>Z≦1/2t</td><td>Not over viewing area</td><td>x≦1/8a</td></tr><tr><td>1/2t＜z≦2t</td><td>Not exceed 1/3k</td><td>x≦1/8a</td></tr></table>⊙If there are 2 or more chips, x is total length of each chip.


6.1.2 Corner crack:


<table><tr><th>z: Chip thickness</th><th>y: Chip width</th><th>x: Chip length</th></tr><tr><td>Z≦1/2t</td><td>Not over viewing area</td><td>x≦1/8a</td></tr><tr><td>1/2t＜z≦2t</td><td>Not exceed 1/3k</td><td>x≦1/8a</td></tr></table>⊙If there are 2 or more chips, x is the total length of each chip.</td><td>2.5</td></tr>
</table>

WINSTAR DISPLAY Co., Ltd.

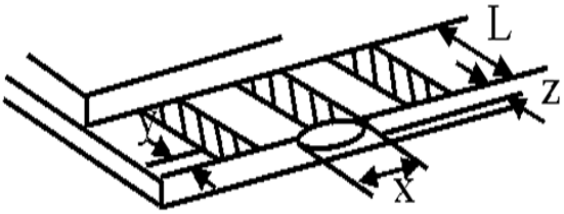
<table>
<tr><th>No</th><th>Item</th><th>Criterion</th><th>AQL</th></tr>
<tr><td>06</td><td>Glass crack</td><td>
Symbols :
x: Chip length y: Chip width z: Chip thickness
k: Seal width t: Glass thickness a: LCD side length
L: Electrode pad length
6.2 Protrusion over terminal :
6.2.1 Chip on electrode pad :


<table>
<tr><th>y: Chip width</th><th>x: Chip length</th><th>z: Chip thickness</th></tr>
<tr><td>y≦0.5mm</td><td>x≦1/8a</td><td>0 ＜ z ≦ t</td></tr>
</table>
6.2.2 Non-conductive portion:

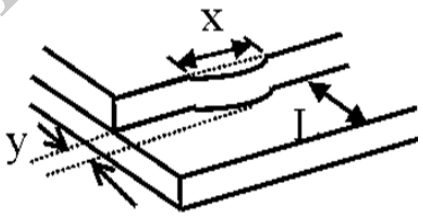
<table>
<tr><th>y: Chip width</th><th>x: Chip length</th><th>z: Chip thickness</th></tr>
<tr><td>y≦ L</td><td>x≦1/8a</td><td>0 ＜ z ≦ t</td></tr>
</table>
⊙If the chipped area touches the ITO terminal, over 2/3 of the ITO must remain and be inspected according to electrode terminal specifications.
⊙If the product will be heat sealed by the customer, the alignment mark not be damaged.
6.2.3 Substrate protuberance and internal crack.
<table>
<tr><th>y: width</th><th>x: length</th></tr>
<tr><td>y≦1/3L</td><td>x ≦ a</td></tr>
</table>


</td><td>2.5</td></tr>
</table>

WINSTAR DISPLAY Co., Ltd.

No	Item	Criterion	AQL
07	Cracked glass	The LCD with extensive crack is not acceptable.	2.5
08	Backlight elements	8.1 Illumination source flickers when lit. 8.2 Spots or scratched that appear when lit must be judged. Using LCD spot, lines and contamination standards. 8.3 Backlight doesn't light or color wrong.	0.65 2.5 0.65
09	Bezel	9.1 Bezel may not have rust, be deformed or have fingerprints, stains or other contamination. 9.2 Bezel must comply with job specifications.	2.5 0.65
10	PCB、COB	10.1 COB seal may not have pinholes larger than 0.2mm or contamination. 10.2 COB seal surface may not have pinholes through to the IC. 10.3 The height of the COB should not exceed the height indicated in the assembly diagram. 10.4 There may not be more than 2mm of sealant outside the seal area on the PCB. And there should be no more than three places. 10.5 No oxidation or contamination PCB terminals. 10.6 Parts on PCB must be the same as on the production characteristic chart. There should be no wrong parts, missing parts or excess parts. 10.7 The jumper on the PCB should conform to the product characteristic chart. 10.8 If solder gets on bezel tab pads, LED pad, zebra pad or screw hold pad, make sure it is smoothed down. 10.9 The Scraping testing standard for Copper Coating of PCB  X * Y<=2mm^2	2.5 2.5 0.65 2.5 2.5 0.65 0.65 2.5 2.5
11	Soldering	11.1 No un-melted solder paste may be present on the PCB. 11.2 No cold solder joints, missing solder connections, oxidation or icicle. 11.3 No residue or solder balls on PCB. 11.4 No short circuits in components on PCB.	2.5 2.5 2.5 0.65

WINSTAR DISPLAY Co., Ltd.

NO	Item	Criterion	AQL
12	General appearance	12.1 No oxidation, contamination, curves or, bends on interface Pin (OLB) of TCP.	2.5
		12.2 No cracks on interface pin (OLB) of TCP.	0.65
		12.3 No contamination, solder residue or solder balls on product.	2.5
		12.4 The IC on the TCP may not be damaged, circuits.	2.5
		12.5 The uppermost edge of the protective strip on the interface pin must be present or look as if it cause the interface pin to sever.	2.5
		12.6 The residual rosin or tin oil of soldering (component or chip component) is not burned into brown or black color.	2.5
		12.7 Sealant on top of the ITO circuit has not hardened.	2.5
		12.8 Pin type must match type in specification sheet.	0.65
		12.9 LCD pin loose or missing pins.	0.65
		12.10 Product packaging must the same as specified on packaging specification sheet.	0.65
		12.11 Product dimension and structure must conform to product specification sheet.	0.65
		12.12 Visual defect outside of VA is not considered to be rejection.	0.65

WINSTAR DISPLAY Co., Ltd.

12.Material List of Components for RoHs

1. WINSTAR Display Co., Ltd hereby declares that all of or part of products (with the mark "#"in code), including, but not limited to, the LCM, accessories or packages, manufactured and/or delivered to your company (including your subsidiaries and affiliated company) directly or indirectly by our company (including our subsidiaries or affiliated companies) do not intentionally contain any of the substances listed in all applicable EU directives and regulations, including the following substances.

   Exhibit A：The Harmful Material List

Material	Cd	Pb	Hg	Cr6+	PBB	PBDE	DEHP	BBP	DBP	DIBP
Limited Value	**100 ppm**	**1000 ppm**	**1000 ppm**	**1000 ppm**	**1000 ppm**	**1000 ppm**	**1000 ppm**	**1000 ppm**	**1000 ppm**	**1000 ppm**
Above limited value is set up according to RoHS.										

2. For RoHS compliance, the recommended soldering temperatures for different components are as follows:

(1) FPC：300℃, 1-3 seconds

(2) Backlight AK and metal pin glass: 330℃, 1-5 seconds

Note: Customers should adjust the temperature and duration based on the actual materials used in their soldering process, including the soldering iron, solder paste, and any other components involved.

WINSTAR DISPLAY Co.,Ltd.

13.Recommendable Storage

1. Place the panel or module in the temperature 25°C±5°C and the humidity below 65% RH
2. Do not place the module near organics solvents or corrosive gases.
3. Do not crush, shake, or jolt the module.

WINSTAR DISPLAY Co., Ltd.

winstar **LCM Sample Estimate Feedback Sheet**

Module Number： _____ **Page: 1**

1、Panel Specification：

1. Panel Type： ☐ Pass ☐ NG ,_____
2. View Direction： ☐ Pass ☐ NG ,_____
3. Numbers of Dots： ☐ Pass ☐ NG ,_____
4. View Area： ☐ Pass ☐ NG ,_____
5. Active Area： ☐ Pass ☐ NG ,_____
6. Operating Temperature： ☐ Pass ☐ NG ,_____
7. Storage Temperature： ☐ Pass ☐ NG ,_____
8. Others：_____

2、Mechanical Specification：

1. PCB Size： ☐ Pass ☐ NG ,_____
2. Frame Size： ☐ Pass ☐ NG ,_____
3. Materal of Frame： ☐ Pass ☐ NG ,_____
4. Connector Position： ☐ Pass ☐ NG ,_____
5. Fix Hole Position： ☐ Pass ☐ NG ,_____
6. Backlight Position： ☐ Pass ☐ NG ,_____
7. Thickness of PCB： ☐ Pass ☐ NG ,_____
8. Height of Frame to PCB： ☐ Pass ☐ NG ,_____
9. Height of Module： ☐ Pass ☐ NG ,_____
10. Others： ☐ Pass ☐ NG ,_____

3、Relative Hole Size：

1. Pitch of Connector： ☐ Pass ☐ NG ,_____
2. Hole size of Connector： ☐ Pass ☐ NG ,_____
3. Mounting Hole size： ☐ Pass ☐ NG ,_____
4. Mounting Hole Type： ☐ Pass ☐ NG ,_____
5. Others： ☐ Pass ☐ NG ,_____

4、Backlight Specification：

1. B/L Type： ☐ Pass ☐ NG ,_____
2. B/L Color： ☐ Pass ☐ NG ,_____
3. B/L Driving Voltage (Reference for LED Type)： ☐ Pass ☐ NG ,_____
4. B/L Driving Current： ☐ Pass ☐ NG ,_____
5. Brightness of B/L： ☐ Pass ☐ NG ,_____
6. B/L Solder Method： ☐ Pass ☐ NG ,_____
7. Others： ☐ Pass ☐ NG ,_____

>> **Go to page 2** <<

WINSTAR DISPLAY Co., Ltd.

5、Electronic Characteristics of Module：

1.	Input Voltage：	☐ Pass	☐ NG , _____
2.	Supply Current：	☐ Pass	☐ NG , _____
3.	Driving Voltage for LCD：	☐ Pass	☐ NG , _____
4.	Contrast for LCD：	☐ Pass	☐ NG , _____
5.	B/L Driving Method：	☐ Pass	☐ NG , _____
6.	Negative Voltage Output：	☐ Pass	☐ NG , _____
7.	Interface Function：	☐ Pass	☐ NG , _____
8.	LCD Uniformity：	☐ Pass	☐ NG , _____
9.	ESD test：	☐ Pass	☐ NG , _____
10.	Others：	☐ Pass	☐ NG , _____

6、Summary：

WINSTAR DISPLAY Co., Ltd.

Sales signature：_____

Customer Signature：_____ **Date**： / /