
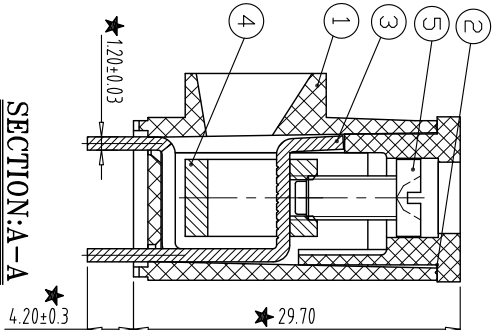
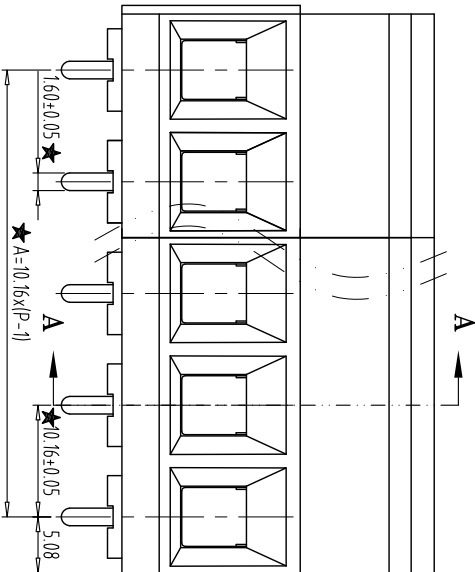
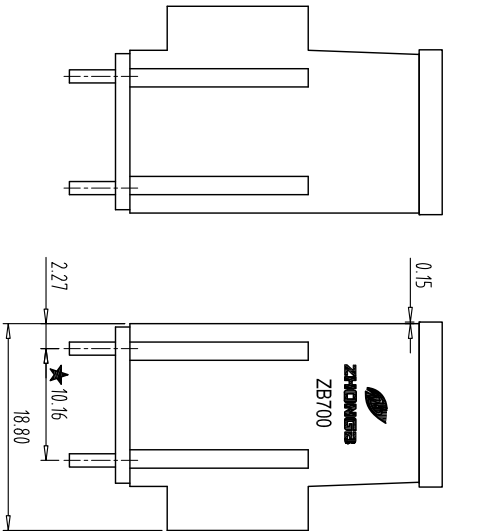
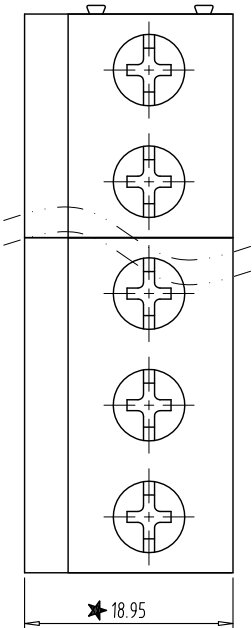


REV	CONTENT	CHK	DATE
V0.1	首次公差	CXL	15.06.11

NOTES:

1. Rating:300V 52A;
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance:500M Ω or more at DC500V
4. Using Temperature Range: -40 $^{\circ}$ C/+105 $^{\circ}$ C
5. Screw Torque Value:12N.m
6. Suitable Electric Wire: 6-26AWG
- 7, "★" the important dimension.

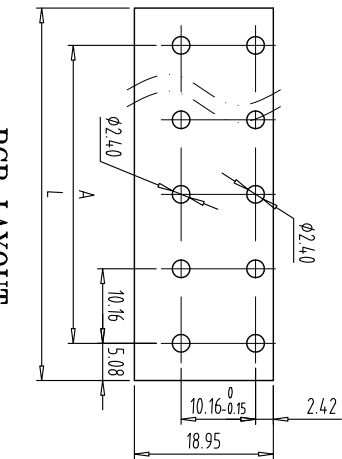

SECTION:A-A

DIM	P	2	3	4	5	6	7	8	9	10	11	12
L		20.32	30.48	40.64	50.80	60.96	71.12	81.28	91.44	101.60	111.76	121.92

A	10.16	20.32	30.48	40.64	50.80	60.96	71.12	81.28	91.44	101.60	111.76
---	-------	-------	-------	-------	-------	-------	-------	-------	-------	--------	--------

over	0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	10	all	0	100	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
±0.18	±0.25	±0.30	±0.35	±0.40	±0.45	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.40	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

5	SCREW	ZBST0014	P	STEEL	M4/Zn Plated
4	BLOCK	ZBXC0009	P	BRASS	Ni Plated
3	SOLDER PIN	ZB700B0001	P	BRASS	Tin Plated
2	COVER	ZB700A1XXXX	/	SEE NOTE	
1	HOUSING	ZB700A0XXXX	/	SEE NOTE	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SK	DATE	2014-12-23	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.	DATE	SCALE	1:1	135T标准品	
APP.	DATE	NAME	ZB700V-XXP-XC		