

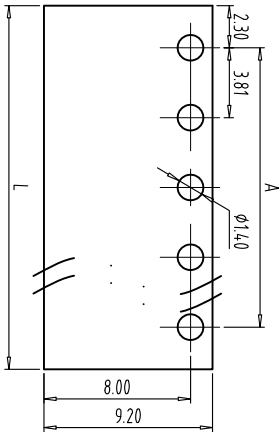



REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	2014-11-29


- NOTES:
- 1.Rating:300V 8A ,
 - 2.Insulation Withstands Voltage: AC2000V/MIN
 - 3.Insulation Resistance: 500MΩ or more at DC500V
 - 4.Using Temperature Range: -40°C---+105°C
 - 5." ★ " is the important dimension

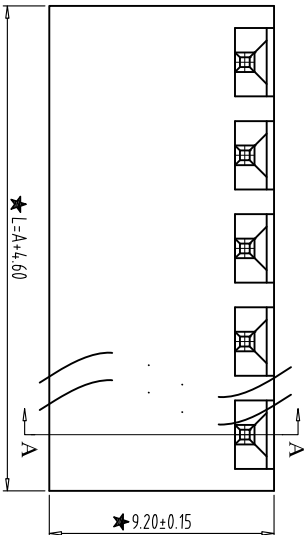

PCB LAYOUT
S=3:1

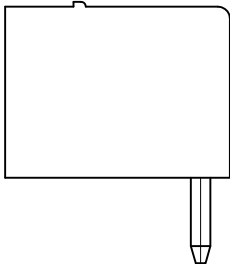

SECTION:A-A

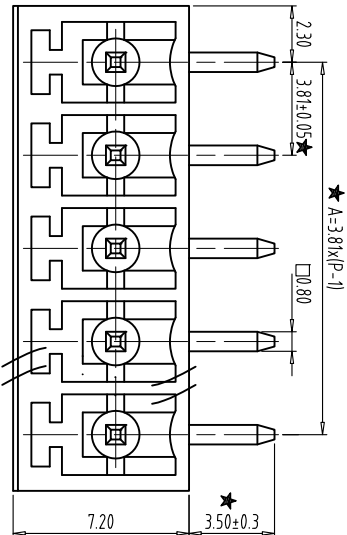

Total Pitch Tolerances										Nominal dimension range										±	≡	—	//
in mm										in mm													

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	10	0	100	150	0
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	100	150	150	150	150
±0.18	±.20	±0.25	±0.3	±0.35	±.44	±0.60	±0.70	±.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

2	PIN	ZF100B0001	P	BRASS	Sn Plated
1	HOUSING	ZF200A0XXXX	1	PA66(V0)	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CXL	DATE	SIZE	A4	UNITS mm
CHK.	DATE		SCALE	4:1	SHEET/OF 1 / 1
APP.	DATE				
NINGBO ZHONGBO PHOTOVOLTALIC TECHNOLOGY CO., LTD			NAME	ZBF200R-XXP-X	



NINGBO ZHONGBO PHOTOVOLTALIC TECHNOLOGY CO., LTD

ZB-02-ZBF200RXXPX

DWGNO.

ZB-02-ZBF200RXXPX

1