
Rating	:500mA 30V DC.	Contact Resistance	:100mΩ Max. (initial)
Operating Position	001 Series : 6.7mm±0.5mm. 002 Series : 5.5mm±0.1mm. 003 Series : 6mm±0.5mm. 004 Series : 5.7mm±0.4mm.	Operating Force	:50g Max.
Life	:300,000 Cycles Min.	Operating Temperature	:-25C ~ +70C.
Insulation Resistance	:100MΩ Min. (at 500V DC)	Ambient Humidity	:35% ~ 85%RH.
Dielectric Withstanding Voltage	:250V AC 1 minute.	Maifunction Durability	:10 ~ 55Hz 1.5mm. double amplitude during 2 hours.




SSM-001



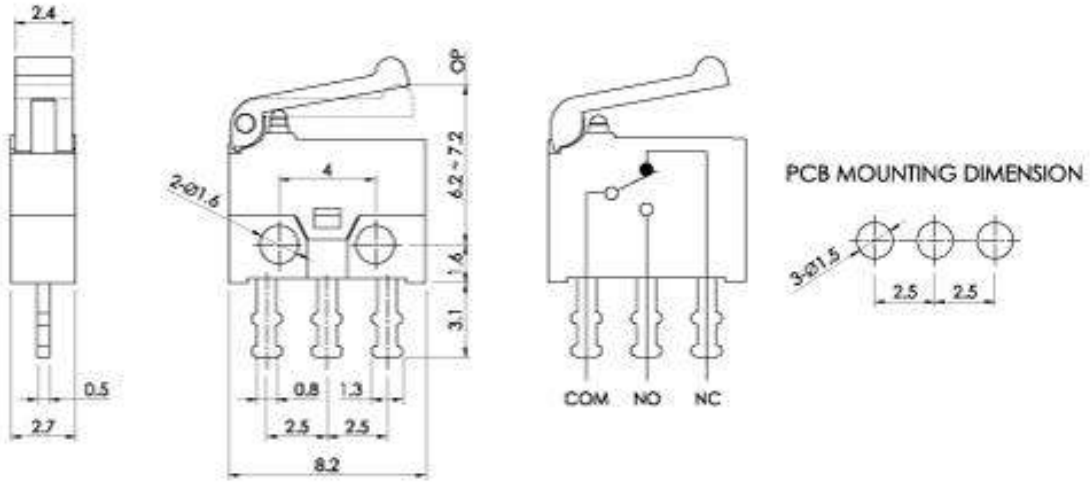

SSM-001L


L1 = 1.5
L2 = 3.1

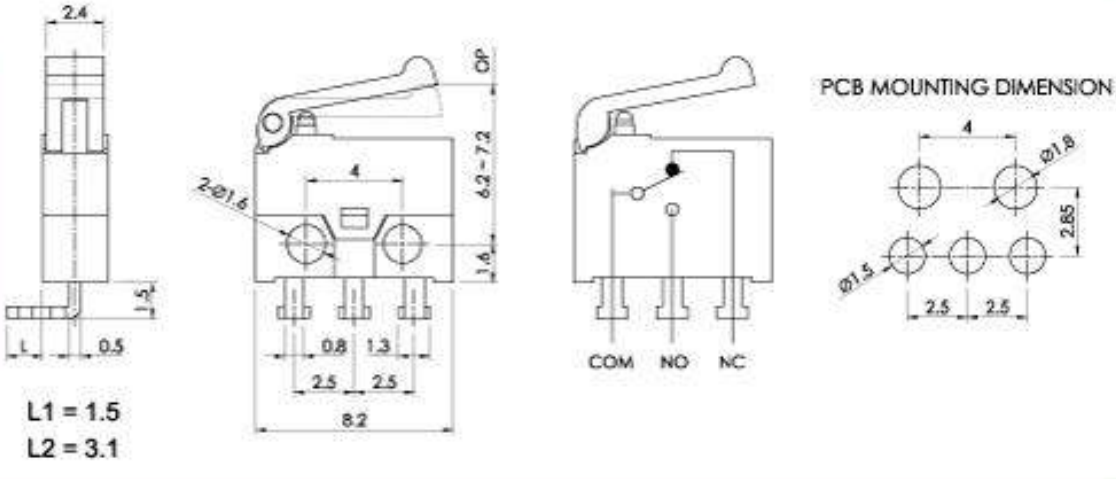




SSM-001R


L1 = 1.5

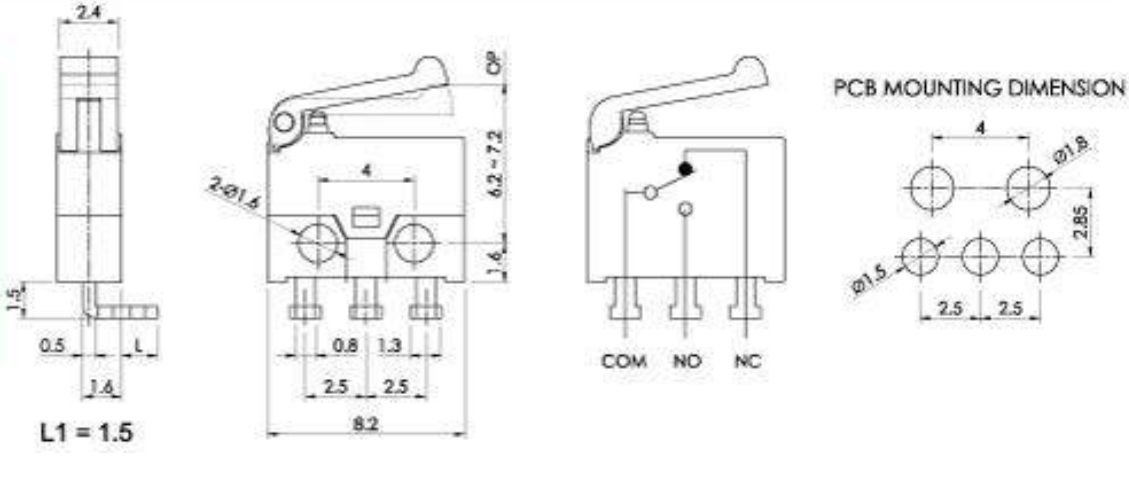





SSM-003



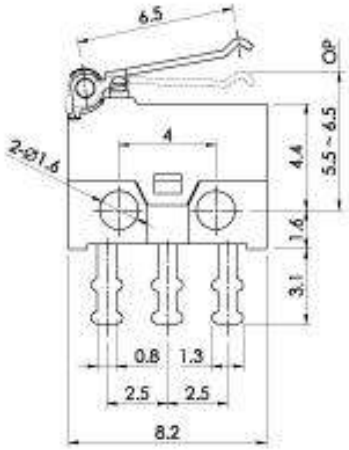

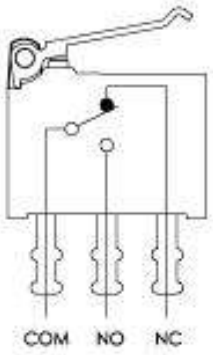



PCB MOUNTING DIMENSION







SSM-004



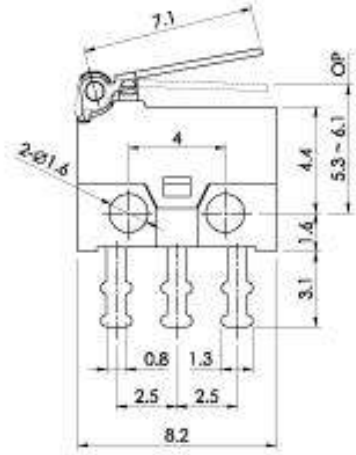




PCB MOUNTING DIMENSION







SSM-003L

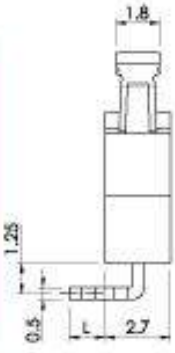

L1 = 1.5
L2 = 3.1

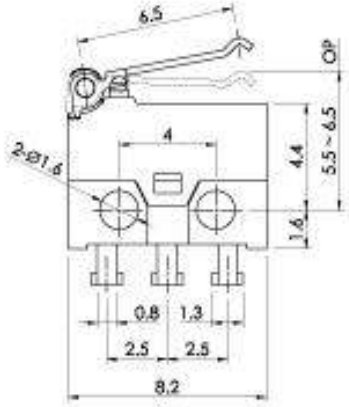



PCB MOUNTING DIMENSION

