



Spec No. :DS22-2004-210 Effective Date: 12/22/2021

Revision: E

**LITE-ON DCC** 

RELEASE

BNS-OD-FC001/A4



# 1. Description

SMD LED lamps from Lite-On are available in miniature sizes and special configurations for automated PC board assembly and space-sensitive applications. These SMD LED lamps are suitable for use in a wide variety of electronic equipment, including cordless and cellular phones, notebook computers, network systems, home appliances, and indoor signboard applications.


#### 1.1 Features

- Meet ROHS.
- Side Looking Full Color Chip LED With Tin Plating
- Ultra Bright InGaN / AlInGaP Chip LED.
- Package in 8mm tape on 7" diameter reels.
- EIA STD Package.
- I.C. Compatible.
- Compatible with Automatic Placement Equipment.
- Compatible with Infrared Reflow Solder Process.

#### 1.2 Applications

- Telecommunication, Office automation, home appliances, industrial equipment
- Keypad/Keyboard Backlighting
- Status indicator
- Micro-displays
- Signal and Symbol Luminary

# 2. Package Dimensions

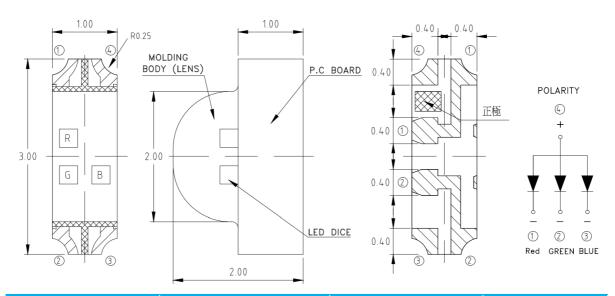

Part No.	Lens Color	Source Color	Pin Assignment
LTST-S32F1KT-5A		AllnGaP Red	1
	Water Clear	InGaN Green	2
		InGaN Blue	3

#### Notes:

- 1. All dimensions are in millimeters.
- 2. Tolerance is  $\pm 0.1$  mm (.004") unless otherwise noted.




# 3. Rating and Characteristics

## 3.1 Absolute Maximum Ratings at Ta=25℃

Parameter	LTST-S32F1KT-5A			Unit
, aramots.	Red	Green	Blue	O.I.I.
Power Dissipation	75	80	80	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	80	100	100	mA
DC Forward Current	30	20	20	mA
Operating Temperature Range		-20 °C to +	80 °C	
Storage Temperature Range -30 °C to +100°C				
Infrared Soldering Condition	2	:60 ℃ For 10 \$	Seconds	

## 3.2 Suggest IR Reflow Condition For Pb Free Process:

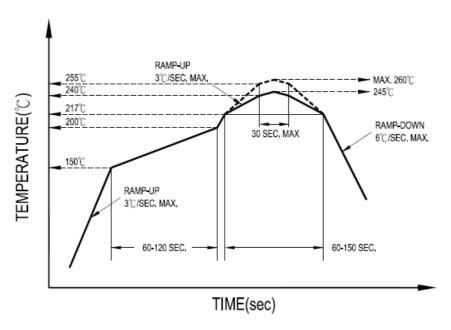



## 3.3 Electrical / Optical Characteristics at Ta=25℃

Parameter	Parameter Symbol		LTST-S32F1KT-5A			Unit	Test
raranietei	Syllibol		Red	Green	Blue	Offic	Condition
		MIN.	18.0	45.0	11.2		JE 5 A
Luminous Intensity	IV	TYP.	-	-	-	mcd	IF = 5mA
		MAX.	45.0	180.0	45.0		Note 1
Viewing Angle	<b>2θ</b> 1/2	TYP.		130		deg	Note 2 (Fig.5)
Dook Emission Woyslandth	Λn	TYP.	632	520	468	nm	Measurement
Peak Emission Wavelength	Λр	IIF.	032 320	520	400	11111	@Peak (Fig.1)
	λd	MIN.	617	520	463	nm	IF = 5mA Note 3
Dominant Wavelength		TYP.	624	527	470		
		MAX.	631	540	477		
Spectral Line Half-Width	Δλ	TYP.	17	35	26	nm	
Forward Voltage	VF	MIN.	1.6	2.7	2.7	V	IF = 5 mA
Torward voltage	VI	MAX.	2.3	3.1	3.1		11 - 5111/1
Reverse Current	IR MAX	MAX	10	10	10	μA	VR = 5V
Troverse Ourient	Ш	1717.173	. 10	10	10	μΑ	Note 5

#### Notes:

- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- 2. Iv classification code is marked on each packing bag.
- 3. The chromaticity coordinates (x, y) is derived from the 1931 CIE chromaticity diagram.
- 4. Caution in ESD:

Static Electricity and surge damages the LED. It is recommend to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

5. Reverse voltage (VR) condition is applied to IR test only. The device is not designed for reverse operation



# 4. Bin Rank

### 4.1 Bin code list

### ■ VF Rank

Forward \	/oltage Color : <u>Blue,</u> Uni	t: V @5mA
Bin Code	Min.	Max.
E7	2.70	2.90
E8	2.90	3.10

Tolerance on each Forward Voltage bin is +/-0.1 volt

Forward V	oltage Color : <u>Green,</u> Un	it: V @5mA
Bin Code	Min.	Max.
E7	2.70	2.90
E8	2.90	3.10

Tolerance on each Forward Voltage bin is +/-0.1 volt



#### ■ IV Rank

Luminous Int	ensity Color : <u>Blue</u> , Uni	t: mcd @5 mA
Bin Code	Min.	Max.
L	11.2	18.0
М	18.0	28.0
N	28.0	45.0

Tolerance on each Luminous Intensity bin is +/- 15%

Luminous Inte	ensity Color : <u>Green</u> , Un	it: mcd @5mA
Bin Code	Min.	Max.
Р	45.0	71.0
Q	71.0	112.0
R	112.0	180.0

Tolerance on each Luminous Intensity bin is +/- 15%

Luminous In	tensity Color : <u>Red</u> , Uni	t: mcd @5mA
Bin Code	Min.	Max.
М	18.0	28.0
N	28.0	45.0

Tolerance on each Luminous Intensity bin is +/- 15%



## Bin Code List

## Bin Batch List on Barcode

BIN CODE	DESCRIPTION	BIN CODE	DESCRIPTION	BIN CODE	DESCRIPTION	BIN CODE	DESCRIPTION
1	E7E7/MPL	19	E8E7/MPL	37	E8E8/MPL	55	E7E8/MPL
2	E7E7/MPM	20	E8E7/MPM	38	E8E8/MPM	56	E7E8/MPM
3	E7E7/MPN	21	E8E7/MPN	39	E8E8/MPN	57	E7E8/MPN
4	E7E7/MQL	22	E8E7/MQL	40	E8E8/MQL	58	E7E8/MQL
5	E7E7/MQM	23	E8E7/MQM	41	E8E8/MQM	59	E7E8/MQM
6	E7E7/MQN	24	E8E7/MQN	42	E8E8/MQN	60	E7E8/MQN
7	E7E7/MRL	25	E8E7/MRL	43	E8E8/MRL	61	E7E8/MRL
8	E7E7/MRM	26	E8E7/MRM	44	E8E8/MRM	62	E7E8/MRM
9	E7E7/MRN	27	E8E7/MRN	45	E8E8/MRN	63	E7E8/MRN
10	E7E7/NPL	28	E8E7/NPL	46	E8E8/NPL	64	E7E8/NPL
11	E7E7/NPM	29	E8E7/NPM	47	E8E8/NPM	65	E7E8/NPM
12	E7E7/NPN	30	E8E7/NPN	48	E8E8/NPN	66	E7E8/NPN
13	E7E7/NQL	31	E8E7/NQL	49	E8E8/NQL	67	E7E8/NQL
14	E7E7/NQM	32	E8E7/NQM	50	E8E8/NQM	68	E7E8/NQM
15	E7E7/NQN	33	E8E7/NQN	51	E8E8/NQN	69	E7E8/NQN
16	E7E7/NRL	34	E8E7/NRL	52	E8E8/NRL	70	E7E8/NRL
17	E7E7/NRM	35	E8E7/NRM	53	E8E8/NRM	71	E7E8/NRM
18	E7E7/NRN	36	E8E7/NRN	54	E8E8/NRN	72	E7E8/NRN

# **BIN** Description

BIN CODE	Description
41	$E7E8/MQM \rightarrow VF(Green) + VF(Blue) / IV(Red) + IV (Green) + IV (Blue)$



# 5. Typical Electrical / Optical Characteristics Curves.

### (25℃ Ambient Temperature Unless Otherwise Noted)


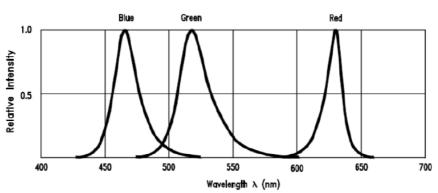


Fig.1 Relative Intensity vs. Wavelength



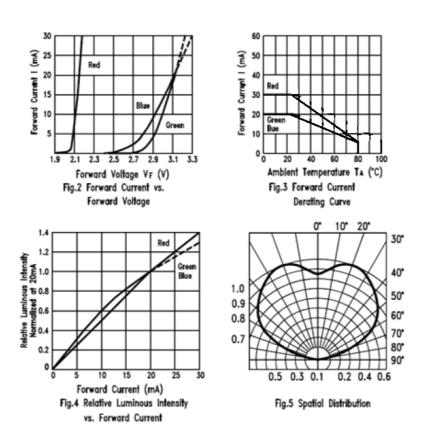


## 6. User Guide

#### 6.1 Cleaning


Do not use unspecified chemical liquid to clean LED they could harm the package.

If clean is necessary, immerse the LED in ethyl alcohol or in isopropyl alcohol at normal temperature for less one minute.

### 6.2 Recommend Printed Circuit Board Attachment Pad & Soldering Direction



## 6.3 Package Dimensions Of Tape And Reel

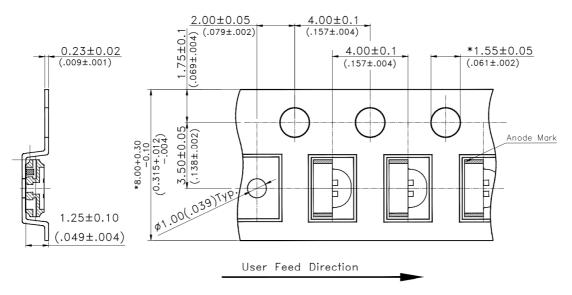



#### Note:

1. All dimensions are in millimeters (inches).



## **6.4 Package Dimensions of Reel**





#### Notes:

- 1. Empty component pockets sealed with top cover tape.
- 2. 7 inch reel-3000 pieces per reel.
- 3. Minimum packing quantity is 500 pieces for remainders.
- 4. The maximum number of consecutive missing lamps is two.
- 5. In accordance with ANSI/EIA 481 specifications.



## 7. Cautions

#### 7.1 Application

The LEDs described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household applications). Consult Liteon's Sales in advance for information on applications in which exceptional reliability is required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as in aviation, transportation, traffic control equipment, medical and life support systems and safety devices).

#### 7.2 Storage

The package is sealed:

The LEDs should be stored at 30℃ or less and 90%RH or less. And the LEDs are limited to use within one year, while the LEDs is packed in moisture-proof package with the desiccants inside.

The package is opened:

The storage ambient for the LEDs should not exceed 30℃ temperature or 60% relative humidity.

It is recommended that LEDs out of their original packaging are IR-reflowed within one week. (MSL 3).

For extended storage out of their original packaging, it is recommended that the LEDs be stored in a sealed container with appropriate desiccant, or in a desiccators with nitrogen ambient.

LEDs stored out of their original packaging for more than one week should be baked at about 60 deg C for at least 20 hours before solder assembly.

#### 7.3 Cleaning

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED if necessary.

#### 7.4 Soldering

Recommended soldering conditions:

Ref	ow soldering	Soldering iron		
Pre-heat	150~200℃	Temperature	300℃ Max.	
Pre-heat time	120 sec. Max.	Soldering time	3 sec. Max.	
Peak temperature	260℃ Max.		(one time only)	
Soldering time	10 sec. Max.(Max. two times)			

#### Notes:

Because different board designs use different number and types of devices, solder pastes, reflow ovens, and circuit boards, no single temperature profile works for all possible combinations.

However, you can successfully mount your packages to the PCB by following the proper guidelines and PCB-specific characterization.

LITE-ON Runs both component-level verification using in-house **KYRAMX98** reflow chambers and board-level assembly. The results of this testing are verified through post-reflow reliability testing. Profiles used at LITE-ON are based on JEDEC standards to ensure that all packages can be successfully and reliably surface mounted.

Figure on page3 shows a sample temperature profile compliant to JEDEC standards. You can use this example as a generic target to set up your reflow process. You should adhere to the JEDEC profile limits as well as specifications and recommendations from the solder paste manufacturer to avoid damaging the device and create a reliable solder joint.





#### 7.5 Drive Method

A LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

#### Circuit model A

### Circuit model B





- (A) Recommended circuit.
- (B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

### 7.6 ESD (Electrostatic Discharge)

Static Electricity or power surge will damage the LED.

Suggestions to prevent ESD damage:

- Use of a conductive wrist band or anti-electrostatic glove when handling these LEDs.
- All devices, equipment, and machinery must be properly grounded.
- Work tables, storage racks, etc. should be properly grounded.
- Use ion blower to neutralize the static charge which might have built up on surface of the LED's plastic lens as a result of friction between LEDs during storage and handling.

ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or "no lightup" at low currents.

To verify for ESD damage, check for " lightup " and Vf of the suspect LEDs at low currents.

The Vf of "good" LEDs should be >2.0V@0.1mA for InGaN product and >1.4V@0.1mA for AllnGaP product.



# 8. Reliability Test

Classification	Test Item	Test Condition	Reference Standard
	Operation Life	Ta= Under Room Temperature As Per Data Sheet Maximum Rating *Test Time= 1000HRS (-24HRS,+72HRS)	MIL-STD-750D:1026 MIL-STD-883D:1005 JIS C 7021:B-1
Endurance	High Temperature High Humidity Storage	Ta= 65±5°C,RH= 90∼95% *Test Time= 240HRS±2HRS	MIL-STD-202F:103B JIS C 7021:B-11
Test	High Temperature Storage	Ta= 105±5 °C *Test Time=1000HRS (-24HRS,+72HRS)	MIL-STD-883D:1008 JIS C 7021:B-10
	Low Temperature Storage	Ta= -55±5 °C *Test Time= 1000HRS (-24HRS,+72HRS)	JIS C 7021:B-12
	Temperature Cycling	105 °C $\sim$ 25 °C $\sim$ -55 °C $\sim$ 25 °C 30mins 5mins 30mins 5mins 10 Cycles	MIL-STD-202F:107D MIL-STD-750D:1051 MIL-STD-883D:1010 JIS C 7021:A-4
	Thermal Shock	$85 \pm 5$ °C $\sim$ -40 °C $\pm 5$ °C 10mins 10mins 10 cycles	MIL-STD-202F:107D MIL-STD-750D:1051 MIL-STD-883D:1011
Environmental	Solder Resistance	T.sol= 260 ± 5 °C Dwell Time= 10 ± 1secs	MIL-STD-202F:210A MIL-STD-750D:2031 JIS C 7021:A-1
Test	IR-Reflow	Ramp-up rate(217 °C to Peak) +3 °C / second max Temp. maintain at 175(±25) °C 180 seconds max Temp. maintain above 217 °C 60-150 seconds Peak temperature range 260 °C +0/-5 °C Time within 5°C of actual Peak Temperature (tp) 10-30 seconds Ramp-down rate +6 °C /second max	MIL-STD-750D:2031.2 J-STD-020D
	Solder ability	T.sol= 235 ± 5 °C Immersion time 2±0.5 sec Immersion rate 25±2.5 mm/sec Coverage ≥95% of the dipped surface	MIL-STD-202F:208D MIL-STD-750D:2026 MIL-STD-883D:2003 IEC 68 Part 2-20 JIS C 7021:A-2



#### 9. Others

The appearance and specifications of the product may be modified for improvement without prior notice.

# 10. Suggested Checking List

#### Training and Certification

- 1. Everyone working in a static-safe area is ESD-certified?
- 2. Training records kept and re-certification dates monitored?

#### Static-Safe Workstation & Work Areas

- 1. Static-safe workstation or work-areas have ESD signs?
- 2. All surfaces and objects at all static-safe workstation and within 1 ft measure less than 100V?
- 3. All ionizer activated, positioned towards the units?
- 4. Each work surface mats grounding is good?

#### Personnel Grounding

- 1. Every person (including visitors) handling ESD sensitive (ESDS) items wears wrist strap, heel strap or conductive shoes with conductive flooring?
- 2. If conductive footwear used, conductive flooring also present where operator stand or walk?
- 3. Garments, hairs or anything closer than 1 ft to ESD items measure less than 100V\*?
- 4. Every wrist strap or heel strap/conductive shoes checked daily and result recorded for all DLs?
- 5. All wrist strap or heel strap checkers calibration up to date?

Note: \*50V for InGaN LED.

#### **Device Handling**

- 1. Every ESDS items identified by EIA-471 labels on item or packaging?
- 2. All ESDS items completely inside properly closed static-shielding containers when not at static-safe workstation?
- 3. No static charge generators (e.g. plastics) inside shielding containers with ESDS items?
- 4. All flexible conductive and dissipative package materials inspected before reuse or recycles?

#### Others

- 1. Audit result reported to entity ESD control coordinator?
- 2. Corrective action from previous audits completed?
- 3. Are audit records complete and on file?