

### Chip Ferrite Bead BLM18□□□□□□N1□ Reference Specification

#### 1.Scope

This reference specification applies to Chip Ferrite Bead BLM18\_□N Series.

#### 2.Part Numbering

(ex.) <u>BL</u> <u>M</u> <u>18</u> <u>AG</u> <u>121</u> <u>S</u> <u>N</u> <u>1</u> <u>D</u> (1) (2) (3) (4) (5) (6) (7) (8) (9)

 $\hbox{(1)Product ID} \quad \hbox{(2)Type} \quad \hbox{(3)Dimension(LxW)} \quad \hbox{(4)Characteristics} \quad \hbox{(5)Typical Impedance at 100MHz}$ 

(6)Performance (7)Category (8)Numbers of Circuit (9)Packaging(D:Taping / B:Bulk)

#### 3.Rating

Customer Part Number	Customer MURATA Part Number Part Number		2) andard condition)	Rated Current (mA)		DC Resistance (Ω max.) Initial Values		Remark
			Typical	at 85°C	at 125°C	Values	After Testing	
	BLM18RK121SN1D	120±25%	120	21	00	0.25	0.35	
	BLM18RK121SN1B	12012070	120			0.20	0.00	
	BLM18RK221SN1D	220±25%	220	2	00	0.30	0.40	
	BLM18RK221SN1B	22012070	220			0.00	0.10	For
	BLM18RK471SN1D	470±25%	470	2	00	0.50	0.60	Digital
	BLM18RK471SN1B	022070		_		0.00	0.00	Interface
	BLM18RK601SN1D	600±25%	600	2	00	0.60	0.70	
	BLM18RK601SN1B							
	BLM18RK102SN1D	1000±25%	1000	2	00	0.80	0.90	
	BLM18RK102SN1B							
	BLM18PG300SN1D	20 min.	30	10	000	0.05	0.10	
	BLM18PG300SN1B						-	
	BLM18PG330SN1D	33±25%	33	3000*1	1000*1	0.025	0.050	
	BLM18PG330SN1B							
	BLM18PG600SN1D	40 min.	60	10	000	0.1	0.2	
	BLM18PG600SN1B				l			
	BLM18PG121SN1D BLM18PG121SN1B	120±25%	120	2000*1	1000*1	0.05	0.10	
	BLM18PG181SN1D	400.070/	400	4=00*1	4000*1		2.42	
	BLM18PG181SN1B	180±25%	180	1500*1	1000*1	0.09	0.18	
	BLM18PG221SN1D	000 050/	000	4.400*1	4000*1	0.40	0.44	
	BLM18PG221SN1B	220±25%	220	1400*1	1000*1	0.10	0.14	
	BLM18PG331SN1D	220 - 250/	220	1200*1	1000*1	0.45	0.20	
	BLM18PG331SN1B	330±25%	330	1200	1000	0.15	0.20	
	BLM18PG471SN1D	470±25%	470	1000		0.20	0.26	For DC
	BLM18PG471SN1B	470±2576	470	1000		0.20	0.20	power line
	BLM18KG221SN1D	220±25%	220	2200*1	1500*1	0.050	0.060	
	BLM18KG221SN1B	220 ± 20 70	220	2200	1000	0.000	0.000	
	BLM18KG331SN1D	330±25%	330	1700*1	1200*1	0.080	0.095	
	BLM18KG331SN1B	000=2070	000			0.000	0.000	
	BLM18KG471SN1D	470±25%	470	1500*1	1000*1	0.130	0.145	
	BLM18KG471SN1B							
	BLM18KG601SN1D BLM18KG601SN1B	600±25%	600	1300*1	1000*1	0.150	0.165	
	BLM18KG102SN1D BLM18KG102SN1B	1000±25%	1000	1000*1	800*1	0.200	0.230	
	<b>†</b>					-	-	
	BLM18SD220SN1D	22±25%	22	6000*	3500 <sup>*1</sup>	0.008	0.013	
	BLM18SD220SN1B					1	-	
	BLM18SG330SN1D BLM18SG330SN1B	33±25%	33	6000*1	3500*1	0.008	0.013	

#### Spec. No. JENF243A-0003AB-01

# Reference Only P.2/12

	243A-0003AB-01						P.2/12
		Impedance (Ω)	Rated	DC Re	sistance		
Customer	MURATA	(at 100MHz, Under Sta		Current		nax.)	
Part Number	Part Number	Testing Co	ndition)	(mA)	Initial	Values	Remark
1 art rainbei	1 art rambor		Typical	at at	Values	After	
			. , p	85°C 125°C		Testing	
	BLM18AG121SN1D	120±25%	120	800	0.18	0.28	
	BLM18AG121SN1B						
	BLM18AG151SN1D	150±25%	150	700	0.25	0.35	
	BLM18AG151SN1B						
	BLM18AG221SN1D	220±25%	220	700	0.25	0.35	
	BLM18AG221SN1B						For
	BLM18AG331SN1D	330±25%	330	600	0.30	0.40	general
	BLM18AG331SN1B						use
	BLM18AG471SN1D	470±25%	470	550	0.35	0.45	
	BLM18AG471SN1B						
	BLM18AG601SN1D	600±25%	600	500	0.38	0.48	
	BLM18AG601SN1B						
	BLM18AG102SN1D BLM18AG102SN1B	1000±25%	1000	450	0.50	0.60	
	BLM18BB050SN1D				<u> </u>		
	BLM18BB050SN1B	5±25%	5	800	0.05	0.10	
	BLM18BA050SN1D						
	BLM18BA050SN1B	5±25%	5	500	0.2	0.3	
	BLM18BB100SN1D						
	BLM18BB100SN1B	10±25%	10	700	0.10	0.20	
	BLM18BA100SN1D						
	BLM18BA100SN1B	10±25%	10	500	0.25	0.35	
	BLM18BB220SN1D						
	BLM18BB220SN1B	22±25%	22	700	0.20	0.30	
	BLM18BA220SN1D						
	BLM18BA220SN1B	22±25%	22	500	0.35	0.45	
	BLM18BB470SN1D						
	BLM18BB470SN1B	47±25%	47	600	0.25	0.35	
	BLM18BD470SN1D						
	BLM18BD470SN1B	47±25%	47	500	0.3	0.4	
	BLM18BA470SN1D						
	BLM18BA470SN1B	47±25%	47	300	0.55	0.65	
	BLM18BB600SN1D						
	BLM18BB600SN1B	60±25%	60	600	0.25	0.35	For
	BLM18BA750SN1D			0.7.7	0 = -	0.55	high speed
	BLM18BA750SN1B	75±25%	75	300	0.70	0.80	signal line
	BLM18BB750SN1D			0.7.7			
	BLM18BB750SN1B	75±25%	75	600	0.30	0.40	
	BLM18BB121SN1D	400.0501	400	550	0.00	0.40	
	BLM18BB121SN1B	120±25%	120	550	0.30	0.40	
	BLM18BD121SN1D	400.050/	400	200	0.4	0.5	
	BLM18BD121SN1B	120±25%	120	300	0.4	0.5	
	BLM18BA121SN1D	400.050/	400	000	0.0	4.0	
	BLM18BA121SN1B	120±25%	120	200	0.9	1.0	
	BLM18BB141SN1D	140,050/	1.40	F00	0.05	0.45	
	BLM18BB141SN1B	140±25%	140	500	0.35	0.45	
	BLM18BB151SN1D	150.050/	150	450	0.27	0.47	
	BLM18BB151SN1B	150±25%	150	450	0.37	0.47	
	BLM18BD151SN1D	150.050/	450	200	0.4	0.5	
	BLM18BD151SN1B	150±25%	150	300	0.4	0.5	
	BLM18BB221SN1D	220, 250/	220	450	0.45	0.55	
	BLM18BB221SN1B	220±25%	220	450	0.45	0.55	
	BLM18BD221SN1D	220+250/	220	250	0.45	0.55	
	BLM18BD221SN1B	220±25%	220	250	0.45	0.55	

# Reference Only P.3/12

		Impedance $(\Omega)$		Rated		DC Resistance			
Customer	MURATA				Current		nax.)		
Part Number	Part Number	Testing Co				Initial	Values	Remark	
			Typical	at at 85°C 125°C		Values	After Testing		
			. 71	85°C	85°C 125°C		resung		
	BLM18BB331SN1D	330±25%	330	4	00	0.58	0.68		
	BLM18BB331SN1B								
	BLM18BD331SN1D	330±25%	330	2	50	0.5	0.6		
	BLM18BD331SN1B								
	BLM18BD421SN1D	420±25%	420	2	50	0.55	0.65		
	BLM18BD421SN1B								
	BLM18BB471SN1D	470±25%	470	3	00	0.85	0.95		
	BLM18BB471SN1B								
	BLM18BD471SN1D	470±25%	470	2	50	0.55	0.65		
	BLM18BD471SN1B	11 0220 70		_		0.00	0.00		
	BLM18BD601SN1D	600±25%	600	2	00	0.65	0.75		
	BLM18BD601SN1B	00012070	000			0.00	0.70		
	BLM18BD102SN1D	1000±25%	1000	ာ	00	0.85	0.95		
	BLM18BD102SN1B	1000±2070	1000			0.00	0.95		
	BLM18BD152SN1D	1500.050/	1500		<u></u>	4.0	4.0	For	
	BLM18BD152SN1B	1500±25%	1500	1	50	1.2	1.3	high speed	
	BLM18BD182SN1D	1000 0701	4000					signal line	
	BLM18BD182SN1B	1800±25%	1800	1	50	1.5	1.6		
	BLM18BD222SN1D							1	
	BLM18BD222SN1B	2200±25%	2200	150		1.5	1.6		
	BLM18BD252SN1D			+					
	BLM18BD252SN1B	2500±25%	2500		50	1.5	1.6		
	BLM18TG121TN1D					<del>                                     </del>			
	BLM18TG121TN1B	120±25%	120	200		0.25	0.3		
	BLM18TG221TN1D	220±25%	220	200		0.3	0.4		
	BLM18TG221TN1B								
	BLM18TG601TN1D	600±25%	600	200		0.45	0.6		
	BLM18TG601TN1B								
	BLM18TG102TN1D	1000±25%	1000	1	00	0.6	0.8		
	BLM18TG102TN1B				ı				
	BLM18SG260TN1D	26±25%	26	6000*1	1000*1	0.007	0.012		
	BLM18SG260TN1B		<u> </u>						
	BLM18SG700TN1D	70±25%	70	4000*1	1000*1	0.020	0.030		
	BLM18SG700TN1B		ļ -						
	BLM18SG121TN1D	120±25%	120	3000*1	1000*1	0.025	0.035		
	BLM18SG121TN1B		-						
	BLM18SG221TN1D BLM18SG221TN1B	220±25%	220	2500*1	1000*1	0.040	0.055		
	BLM18SG331TN1D								
	BLM18SG331TN1B	330±25%	330	1500*1	1000*1	0.070	0.085		
	BLM18SN220TN1D							For DC	
	BLM18SN220TN1B	22±7	22	8000*1	5000*1	0.004	0.005	power line	
	BLM18KG260TN1D	_						(Thin type)	
	BLM18KG260TN1B	26±25%	26	26   6000*1   400		0.007	0.012		
	BLM18KG300TN1D	0.5 : .5-:		5000*1 5000*1					
	BLM18KG300TN1B	30±25%	30	5000*1 3300*1		0.010	0.015		
	BLM18KG700TN1D	70 1 050/		2500*1 2222*1		0.000	0.000		
	BLM18KG700TN1B	70±25%	70	3500*1	2200*1	0.022	0.032		
	BLM18KG101TN1D	100+250/	100	2000*1	1000*1	0.000	0.040		
	BLM18KG101TN1B	100±25%	100	3000*1	1900*1	0.030	0.040		
	BLM18KG121TN1D	120±25%	120	3000*1	1900*1	0.020	0.040		
	BLM18KG121TN1B	120±23%	120	3000	1900	0.030	0.040		


### Reference Only

• Operating Temperature : -55°C to +125°C


depending on the operating temperature.

(\*1)In case of Rated current is more than 1A, Rated Current is derated as right figure


• Storage Temperature : -55°C to +125°C

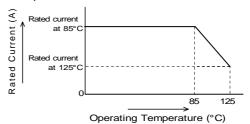

#### 4. Style and Dimensions

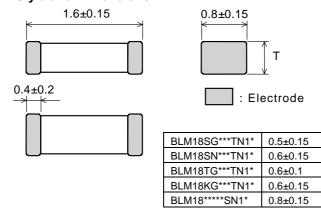

■ Equivalent Circuit



Resistance element becomes dominant at high frequencies.

■ Unit Mass (Typical value) BLM18\*\*\*\*\*SN1\*:0.005g BLM18\*\*\*\*\*TN1\*:0.004g

(in mm)

#### 5.Marking

No marking.

#### **6.Standard Testing Conditions**

< Unless otherwise specified >

Temperature : Ordinary Temp. (15 °C to 35 °C ) Humidity : Ordinary Humidity (25%(RH) to 85%(RH)) < In case of doubt >

Temperature : 20°C±2 °C Humidity : 60%(RH) to 70%(RH)

Atmospheric pressure: 86kPa to 106kPa

#### 7. Specifications

#### 7-1. Electrical Performance

No.	Item	Specification	Test Method
7-1-1	Impedance	Meet item 3.	Measuring Frequency: 100MHz±1MHz Measuring Equipment: KEYSIGHT 4991A or the equivalent Test Fixture: KEYSIGHT 16192A or the equivalent
7-1-2	DC Resistance	Meet item 3.	Measuring Equipment : Digital multi meter For BLM18SN_TN Measuring Equipment : YOKOGAWA 755611 or the equivalent Test Fixture : KEYSIGHT 16044A or the equivalent *Except resistance of the Substrate and Wire

## Reference Only P.5/12

#### 7-2.Mechanical Performance

No.	echanical Pe	Specification	Test Method				
	Appearance	Meet item 4.	Visual Inspection and measured with Slide Calipers.				
	and Dimensions	Weet tell 4.	Visual Inspection and measured with olide Galipers.				
	Bonding	Meet Table 1.	It shall be soldered on the substrate.				
	Strength	T-1.1- 4	Applying Force(F): 6.8N				
		Table 1	Applying Time : 5s±1s Applied direction :Parallel to substrate				
		Appearance No damage	Side view				
		Impedance Within ±30%					
		Change (for BLM18SN (at 100MHz) Within ±50%)	R0.5				
		DC					
		Resistance Meet item 3.					
			Substrate				
7-2-3	Bending		It shall be soldered on the substrate.				
	Strength		Substrate: Glass-epoxy 100mm×40mm×1.6mm				
			Deflection: 1.0mm				
			Speed of Applying Force : 0.5mm/s Pressure jig Keeping Time : 30s				
			R340 F				
			Deflection				
			V TR V 1				
			45mm 45mm Product				
7-2-4	Vibration		It shall be soldered on the substrate.				
			Oscillation Frequency: 10Hz to 55Hz to 10Hz for 1 min				
			Total Amplitude : 1.5mm				
			Testing Time: A period of 2 hours in each of 3 mutually perpendicular directions. (Total 6 h)				
7-2-5	Resistance	Meet Table 2.	Pre-Heating: 150°C±10°C, 60s~90s				
	to Soldering		Solder : Sn-3.0Ag-0.5Cu				
	Heat	Table 2	Solder Temperature : 270°C±5°C				
		Appearance No damage Impedance Within ±30%	Immersion Time: 10s±0.5s Immersion and emersion rates: 25mm/s				
		Impedance Within ±30% Change (for BLM18SN	The second of th				
		(at 100MHz) BLM18KG					
		Within ±50%)					
		DC Meet item 3.					
		Resistance Neet terr 5.	<u> </u>				
7-2-6	Drop	Products shall be no failure					
		after tested.	Method : free fall Height : 75cm				
			Attitude from which the product is dropped: 3 direction				
			The number of times: 3 times for each direction(Total 9 times)				
7-9 7	Solderability	The electrodes shall be at	, , , , , , , , , , , , , , , , , , , ,				
1-2-1			Pro_Hosting				
1-2-1		least 95% covered with new	3 3				
1-2-1		solder coating.	Solder : Sn-3.0Ag-0.5Cu				
1-2-1			3 3				



#### 7-3. Environmental Performance

It shall be soldered on the substrate.


No.	Item	Specification	Test Method
7-3-1	Temperature Cycle	Meet Table 2.	1 cycle: 1 step:-55 °C(+0 °C,-3 °C) / 30min±3min 2 step:Ordinary temp. / 10min to 15min 3 step:+125 °C(+3 °C,-0 °C) / 30min±3min 4 step: Ordinary temp. / 10min to 15min Total of 100 cycles Then measured after exposure in the room condition for 48h±4h.
7-3-2	Humidity	Meet Table 1.	Temperature: 40°C±2°C Humidity: 90%(RH) to 95%(RH) Time: 1000h(+48h,-0h) Then measured after exposure in the room condition for 48h±4h.
7-3-3	Heat Life	Meet Table 2.	Temperature: 125°C±3°C (in case of Rated current is more than 1A, do the test at: +85 °C±3°C) Applying Current: Rated Current Time: 1000h(+48h,-0h) Then measured after exposure in the room condition for 48h±4h.
7-3-4	Cold Resistance	Meet Table 1.	Temperature: -55±2°C Time: 1000h(+48h,-0h) Then measured after exposure in the room condition for 48h±4h.

(in mm)



#### 8. Specification of Packaging

8-1. Appearance and Dimensions (8mm-wide paper tape)

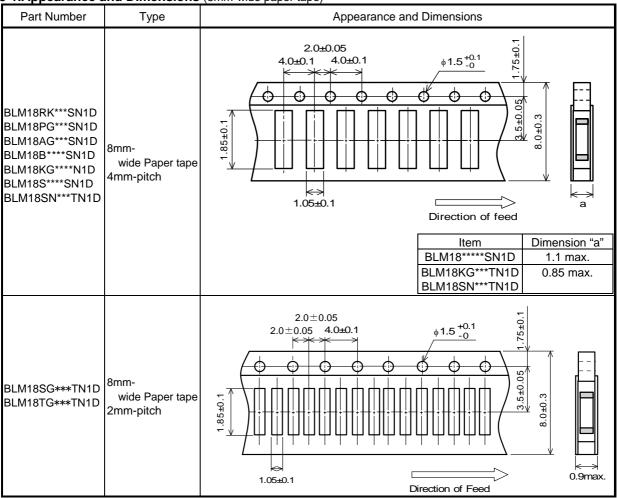

(1) Taping

Products shall be packaged in the cavity of the base tape continuously and sealed by top tape and bottom tape.

- (2) Sprocket hole: The sprocket holes are to the right as the tape is pulled toward the user.
- (3) Spliced point: The base tape and top tape have no spliced point
- (4) Cavity: There shall not be burr in the cavity.
- (5) Missing components number

Missing components number within 0.1% of the number per reel or 1 pc., whichever is greater, and are not continuous. The specified quantity per reel is kept.

#### 8-2. Tape Strength


(1)Pull Strength

•					
Top tape	5N min				
Bottom tape	ON MIII.				

(2)Peeling off force of Top tape

0.1N to 0.6N (Minimum value is typical.)

\*Speed of Peeling off:300mm/min



## Reference Only

#### 8-3. Taping Condition

(1)Standard quantity per reel

Type	Quantity per 180mm reel
BLM18(except BLM18SG/BLM18TG)	4000 pcs. / reel
BLM18SG/BLM18TG	10000 pcs. / reel

- (2)There shall be leader-tape (top tape and empty tape ) and trailer- tape (empty tape) as follows.
- (3)On paper tape, the top tape and the base tape shall not be adhered at the tip of the empty leader tape for more than 5 pitch.

#### (4)Marking for reel

The following items shall be marked on a label and the label is stuck on the reel.

(Customer part number, MURATA part number, Inspection number(\*1), RoHS Marking(\*2), Quantity, etc)

\*1) « Expression of Inspection No. »

(1) Factory Code

(2) Date

First digit Second digit Year / Last digit of year

: Month / Jan. to Sep. ightarrow 1 to 9, Oct. to Dec. ightarrow O, N, D

Third, Fourth digit: Day

(3) Serial No.

\*2) « Expression of RoHS Marking »

 $ROHS - \underline{Y}_{(1)} (\underline{\triangle})$ 

- (1) RoHS regulation conformity parts.
- (2) MURATĂ classification number


#### (5)Outside package

These reels shall be packed in the corrugated cardboard package and the following items shall be marked on a label and the label is stuck on the box.


(Customer name, Purchasing order number, Customer part number, MURATA part number,

RoHS discrimination(\*2), Quantity, etc)

(6) Dimensions of reel and taping (leader-tape, trailer-tape)

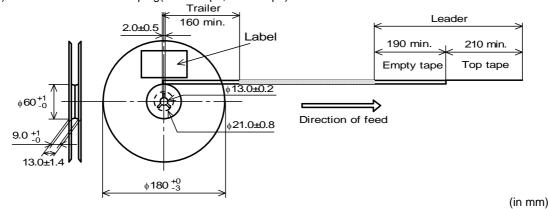

#### 8-4. Specification of Outer Case



Outer Case Dimensions (mm)			Standard Reel Quantity in Outer Case (Reel)
W	D	Н	(Reel)
186	186	93	5

<sup>\*</sup> Above Outer Case size is typical. It depends on a quantity of an order.



#### 9. 🗥 Caution

#### 9-1.Surge current

Excessive surge current (pulse current or rush current) than specified rated current applied to the product may cause a critical failure, such as an open circuit, burnout caused by excessive temperature rise.

Please contact us in advance in case of applying the surge current.

#### 9-2.Limitation of Applications

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property.

- (1) Aircraft equipment
- (6) Disaster prevention / crime prevention equipment
- (2) Aerospace equipment
- (7) Traffic signal equipment
- (3) Undersea equipment
- (8) Transportation equipment (vehicles, trains, ships, etc.)
- (4) Power plant control equipment
- (9) Data-processing equipment
- (5) Medical equipment
- (10) Applications of similar complexity and /or reliability requirements to the applications listed in the above


#### 10. Notice

This product is designed for solder mounting.

Please consult us in advance for applying other mounting method such as conductive adhesive.

#### 10-1.Land pattern designing


- Standard land dimensions
- < For BLM18 series (except BLM18P/BLM18S/BLM18K type) >

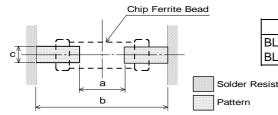

Type	Soldering	а	b	С
BLM18 (except18P/18S/	Flow	0.7	2.2 to 2.6	0.7
BLM18K type)	Reflow	0.7	1.8 to 2.0	0.7

(in mm)

< For BLM18P/BLM18S/BLM18K type >



Rated Current	а	b	С						
(A)				18µm	35µm	70µm			
0.5 to 1.5		Flow		0.7	0.7	0.7			
1.7 to 2.5	0.7	0.7	2.2 to 2.6	0.7	1.2	0.7	0.7		
3 to 4			0.7	0.7	0.7	Kello			2.4
5 to 6		1.8 to 2.0		6.4	3.3	1.65			
8	0.7	2.0	0.7	-	6.4	3.3			
	Current (A) 0.5 to 1.5 1.7 to 2.5 3 to 4	Current (A)  0.5 to 1.5  1.7 to 2.5  3 to 4  5 to 6	Current (A)  0.5 to 1.5  1.7 to 2.5  3 to 4  5 to 6   a b  Flow 2.2 to 2.6 Reflow 1.8 to 2.0	Current (A)         a         b         c           0.5 to 1.5 1.7 to 2.5 3 to 4 5 to 6         0.7         Flow 2.2 to 2.6 Reflow 1.8 to 2.0         0.7	Current (A)         a         b         c         and 18μm           0.5 to 1.5 1.7 to 2.5 3 to 4 5 to 6         0.7         Flow 2.2 to 2.6 Reflow 1.8 to 2.0         0.7         1.2 2.4 6.4	Current (A)         a         b         c         and dimens           0.5 to 1.5         1.7 to 2.5         0.7         1.7 to 2.6         0.7         0.7         0.7           3 to 4         5 to 6         Reflow 1.8 to 2.0         0.7         0.7         0.7         0.7			

(in mm)

#### 10-2. Soldering Conditions

Products can be applied to reflow and flow soldering.

#### (1) Flux, Solder

,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
Flux	Use rosin-based flux, but not highly acidic flux (with chlorine content exceeding 0.2(wt)%.)
	Do not use water-soluble flux.
Solder	Use Sn-3.0Ag-0.5Cu solder
	Standard thickness of solder paste : 100 µm to 200 µm

#### (2) Soldering conditions

• Pre-heating should be in such a way that the temperature difference between solder and ferrite surface is limited to 150°C max. Also cooling into solvent after soldering should be in such a way that the temperature difference is limited to 100°C max.

Insufficient pre-heating may cause cracks on the ferrite, resulting in the deterioration of product quality.

• Standard soldering profile and the limit soldering profile is as follows.


The excessive limit soldering conditions may cause leaching of the electrode and / or resulting in the deterioration of product quality.

<sup>\*</sup>The excessive heat by land pads may cause deterioration at joint of products with substrate.

## Reference Only


#### (3) soldering profile

#### ☐Flow soldering profile

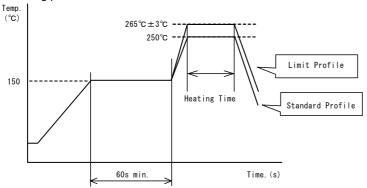

	St	tandard Profile	Limit Profile
Pre-hea	ting 15	50°C、60s min.	
Heating	25	50°C、4∼6s	265°C±3°C, 5s max.
Cycle of	flow 2	times	2 times

#### □Reflow soldering profile

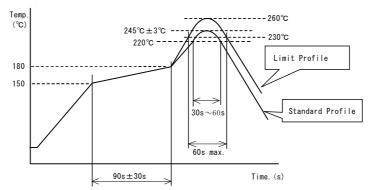

	Standard Profile	Limit Profile	
Pre-heating	150~180°C 、90s±30s		
Heating	above 220°C、30s~60s	above 217°C、60s~150s	
Peak temperature	245±3°C	260°C,10s	
Cycle of reflow	2 times	2 times	

#### 10-3. Reworking with soldering iron

• Pre-heating: 150°C, 1 min

• Soldering iron output: 80W max.

• Tip temperature: 350°C max.

• Tip diameter:  $\phi$  3mm max.

• Soldering time : 3(+1,-0) seconds.

• Times : 2times max.

Note :Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the ferrite material due to the thermal shock.

#### 10-4. Solder Volume

Solder shall be used not to be exceeded as shown below.




Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance.



#### 10-5. Attention regarding P.C.B. bending

The following shall be considered when designing and laying out P.C.B.'s.

(1) P.C.B. shall be designed so that products are not subject to the mechanical stress for board warpage. <Products direction>




Products shall be located in the sideways direction (Length: a<b) to the mechanical stress.

#### (2)Components location on P.C.B. separation.

It is effective to implement the following measures, to reduce stress in separating the board.

It is best to implement all of the following three measures; however, implement as many measures as possible to reduce stress.


Contents of Measures	Stress Level
(1) Turn the mounting direction of the component parallel to the board separation surface.	A > D*1
(2) Add slits in the board separation part.	A > B
(3) Keep the mounting position of the component away from the board separation surface.	A > C



\*1 A > D is valid when stress is added vertically to the perforation as with Hand Separation. If a Cutting Disc is used, stress will be diagonal to the PCB, therefore A > D is invalid.

#### (3) Mounting Components Near Screw Holes

When a component is mounted near a screw hole, it may be affected by the board deflection that occurs during the tightening of the screw. Mount the component in a position as far away from the screw holes as possible.



#### 10-6. Mounting density

Add special attention to radiating heat of products when mounting the inductor near the products with heating. The excessive heat by other products may cause deterioration at joint of this product with substrate.

#### 10-7. Operating Environment

Do not use this product under the following environmental conditions, on deterioration of the Insulation Resistance of the Ferrite material and/or corrosion of Inner Electrode may result from the use.

- (1) in the corrodible atmosphere (acidic gases, alkaline gases, chlorine, sulfur gases, organic gases and etc.)
- (2) in the atmosphere where liquid such as organic solvent, may splash on the products
- (3) in the atmosphere where the temperature / humidity changes rapidly and it is easy to dew

#### 10-8. Resin coating

The impedance value may change and/or it may affect on the product's performance due to high cure-stress of resin to be used for coating / molding products. So please pay your careful attention when you select resin. In prior to use, please make the reliability evaluation with the product mounted in your application set.



#### 10-9. Cleaning Conditions

Products shall be cleaned on the following conditions.

- (1)Cleaning temperature shall be limited to 60°C max. (40°C max. for IPA.)
- (2)Ultrasonic cleaning shall comply with the following conditions, avoiding the resonance phenomenon at the mounted products and P.C.B.

Power:20W/ℓ max. Frequency:28kHz to 40kHz Time:5 min max.

(3)Cleaner

- 1.Alternative cleaner
  - •Isopropyl alcohol (IPA)
- 2. Aqueous agent
  - •PINE ALPHA ST-100S
- (4) There shall be no residual flux and residual cleaner after cleaning.

In the case of using aqueous agent, products shall be dried completely after rinse with de-ionized water in order to remove the cleaner.


(5)Other cleaning

Please contact us.

#### 10-10. Handling of a substrate

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate.

Excessive mechanical stress may cause cracking in the product.



Twisting



#### 10-11. Storage Conditions

(1)Storage period

Use the products within 6 months after delivered.

Solderability should be checked if this period is exceeded.

(2)Storage conditions

• Products should be stored in the warehouse on the following conditions.

Temperature : -10°C to 40°C

Humidity : 15% to 85% relative humidity

No rapid change on temperature and humidity

- Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.
- Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.
- Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.
- Products should be stored under the airtight packaged condition.

(3)Delivery

Care should be taken when transporting or handling product to avoid excessive vibration or mechanical shock.

### 11 . A Note

- (1)Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.
- (2) You are requested not to use our product deviating from the reference specifications.
- (3)The contents of this reference specification are subject to change without advance notice. Please approve our product specifications or transact the approval sheet for product specifications before ordering.