



**SANCORE** Zhongshan Sancore Electronic co.,ltd



XUYI OUGE ELECTRONIC CO.,LTD

**Add:** No.9 Ruiping Rd, Luosha Village, Yongning Industrial, Xiaolan Town, Zhongshan City, Guangdong, China.



Tel: +86-760-22286356      Fax: +86-760-22286951  
Email: sales03@ougedianzi.com      Website: www.ougedianzi.com


## ***SPECIFICATION FOR APPROVAL***

CUSTOMER NAME	Ozdisan		
Item No:	EF20 horizontal transformer		
CUSTOMER NO:		CUSTOMER REVISION:	1.0
OUGE No:	SX-0237EF20	OU GE REVISION:	A1


Note: Please send confirmation to us with signature and seal

sign and seal by seller			Sign and seal by buyer		
Preparer	Reviewer	Approver	Reviewer	Approver	confirmer
ZhiHua Zhang					
Date:	1 <sup>st</sup> Sep. 2017		Date		


# 1. Dimensions (unit:mm)

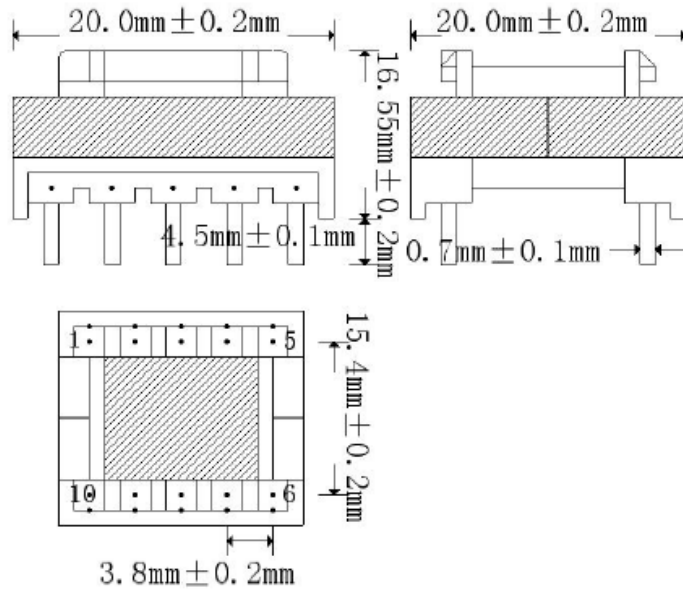

# 2. Circuit diagram:

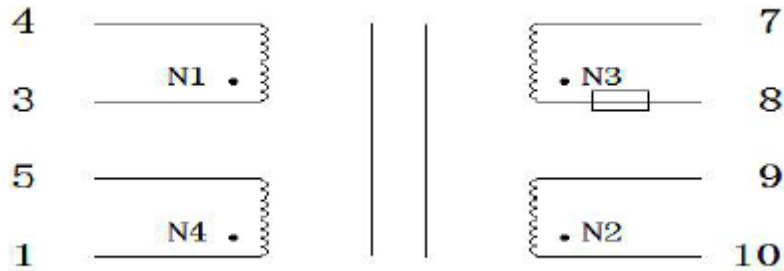

# 3. cross-section drawn:

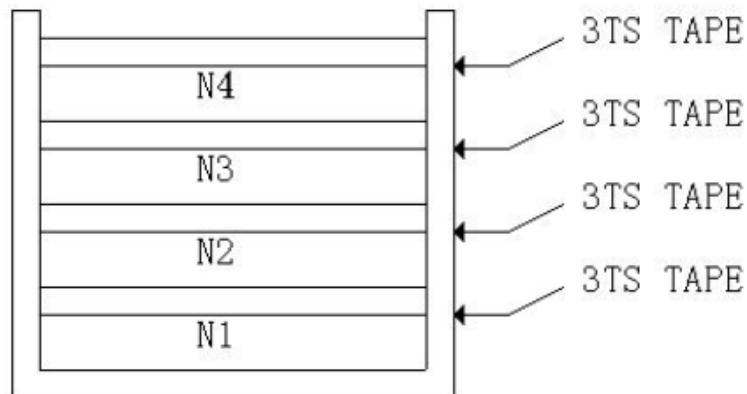

XuYi OuGe Electronic Co., Ltd

TEL: 0760-22131648 Fax: 0760-22286311

Ouge Item No

SX-0237EF20

Name

EF20 horizontal Transformer

Revision

A1

Page No

1/3

#### 4. winding process:

No	Pin(start-stop)	Specification of copper line	Turns	Specification of tape	Layer of tape
N1	3-4	2UEW $\phi$ 0.29mm $\times$ 1P	96	T0.055 $\times$ 15.5mm	3
N2	10-9	T. I. W $\phi$ 0.40mm $\times$ 2P	6	T0.055 $\times$ 15.5mm	3
N3	8-7	T. I. W $\phi$ 0.40mm $\times$ 2P	4	T0.055 $\times$ 15.5mm	3
N4	1-5	2UEW $\phi$ 0.15mm $\times$ 1P	12	T0.055 $\times$ 15.5mm	

#### 5. Description:

1. EF2002-1 horizontal pin5+5, less pin2, 6
2. EF25 PC40 Ferrite Core with 1 side air gap.
3. N2 starting and ending add 28L sleeve, N6 starting add 26L sleeve;
3. Transformers vacuum impregnation and bake.
4. Coils are packaged with 12.8mm yellow tape, Cores are packaged with 5.6mm Yellow tape

#### 6. Electrical Parameter

##### ① Inductance

No	Pins	Specification	Test condition	Test equipment
1	3-4	1.4mH $\pm$ 10%	1.0KHZ 0.3V	TH2819XB

##### ② Leakage Inductance

No	Pins	Specification	Test condition	Test equipment
1	3-4	/	/	TH2819XB

##### ③ Isolation Voltage

No	Part	Standard	Time	Test equipment
1	PRI TO SEC	1000V/AC//3mA/50HZ	5s	WB2671
2	PRI TO CORE	1000V/AC//3mA/50HZ	5s	
3	SEC TO CORE	1000V/AC//3mA/50HZ	5s	

XuYi Electronic oc., ltd  TEL: 0760-22131648 Fax: 0760-22286311  Email:sales03@ougedianzi.com	Item No	SX-0237EF20		
	Name	EF20 horizontal Transformer		
	Revision	A12	Page No	2/3

#### 7. BOM List

No	Name	Specification	Remark
1	Ferrite core	EF20/PC40	SGS
2	Bobbin coil	EF20 pin5: 5	SGS
3	Magnet wire	2UEW 155°C	E85640
4	Insulating oil	T1148-1	E228349
5	Diluent	T1148-1X	
6	MYLAR tape	CT-280 yellow/yellow 0.055mm	E165111
7	High temperature tin	100H	SGS

XuYi OuGe Electronic oc.,ltd TEL: 0760-22131648 FAX: 0760-22286311 Email: sales03@ougedianzi.com	Item No	SX-0237EF20		
	Name:	EF20 horizontal Transformer		
	Revision	A1	Page No	3/3