



ULTRA LOW VF SCHOTTKY RECTIFIER

VOLTAGE 120 Volt CURRENT 10 Ampere

FEATURES

- · Ideal for automated placement
- Ultra low forward voltage drop, low power loss
- · High efficiency operation
- · Low thermal resistance
- Ultra thin profile package for space constrained utilization
- Package suitable for automated handling
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA


Case: TO-277B, Plastic

Terminals: Solderable per MIL-STD-750, Method 2026

Weight: 0.0038 ounces, 0.1088 grams

Marking: Part number





MAXIMUM RATINGS(Ta=25°C unless otherwise noted)

PARAMETER		SYMBOL	VALUE	UNIT	
Maximum Recurrent Peak Reverse Voltage		VRRM	120	V	
Maximum RMS Voltage		VRMS	85	V	
Maximum DC Blocking Voltage		VR	120	V	
Maximum Average Rectified Output Current		l F(AV)	10	А	
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load		IFSM	200	А	
Typical Thermal Resistance	(Note 2) (Note 1)	Rejja Rejjc	110 4	°C/W	
Operating Junction Temperature Range And Storage Temperature Range		ТЈ,Тѕтс	-55 to + 150	°C	

NOTES: 1. Mounted on a FR4 PCB, single-sided copper, mini pad.

2.Mounted on 10cm*10cm*0.5mm copper pad area





ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
Breakdown voltage	VBR	I R=0.5mA	Ta=25°C	120	-	-	V
Instantaneous forward voltage	VF	I F=1A I F=5A I F=10A I F=1A I F=5A	Ta=25°C	- - - -	0.43 0.63 0.74 0.33 0.54	- - 0.79 - -	V
Reverse current	l R	VR=96V	T _A =25°C	-	10	-	μА
		VR=120V	T _A =25°C T _A =125°C		- 16	100	μA mA








Fig.1 Forward Current Derating Curve




Fig.2 Typical Junction Capacitance




Fig.3 Typical Reverse Characteristics




Fig.4 Typical Forward Characteristics





Fig.5 Operating Temperature Derating Curve





MOUNTING PAD LAYOUT

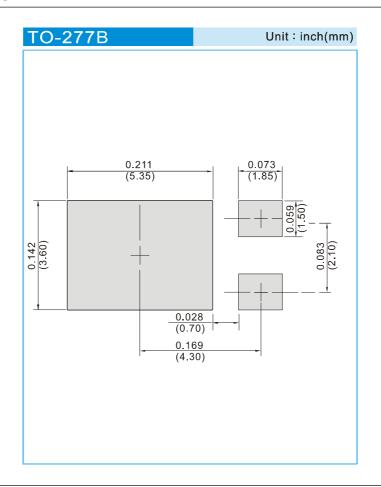

ORDER INFORMATION

• Packing information

T/R - 5K per 13" plastic Reel





Part No_packing code_Version

SVC10120VB_R2_00001

For example :



Packing Code XX			Version Code XXXXX			
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	В	13"	2			
Tube Packing (T/P)	Т	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
 of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
 Customers are responsible in comprehending the suitable use in particular applications.
 Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.