Low Power, Standard Frequency Oscillator



## Features

- 52 standard frequencies between 3.57 MHz and 77.76 MHz
- 100% pin-to-pin drop-in replacement to quartz-based XO
- Excellent total frequency stability as low as ±20 ppm
- Operating temperature from -40°C to 85°C. For 125°C and/or -55°C options, refer to SiT1618, SiT8918, SiT8920
- Low power consumption of 3.5 mA typical at 1.8 V
- Qualify just one device with 1.62 V to 3.63 V continuous supply voltage
- Standby mode for longer battery life
- Fast startup time of 5 ms
- LVCMOS/HCMOS compatible output
- Industry-standard packages: 2.0 x 1.6, 2.5 x 2.0, 3.2 x 2.5, 5.0 x 3.2, 7.0 x 5.0 mm x mm
- Instant samples with Time Machine II and Field Programmable Oscillators
- RoHS and REACH compliant, Pb-free, Halogen-free and Antimony-free
- For AEC-Q100 oscillators, refer to SiT8924 and SiT8925

# **Electrical Characteristics**

All Min and Max limits are specified over temperature and rated operating voltage with 15 pF output load unless otherwise stated. Typical values are at 25°C and nominal supply voltage.

Parameters	Symbol	Min.	Тур.	Max.	Unit	Condition
				requency R	ange	
Output Frequency Range	f	52 standard frequencies between 3.57 MHz and 77.76 MHz		MHz	Refer to Table 13 for the exact list of supported frequencies	
			Freque	ncy Stability	/ and Aging	g
Frequency Stability	F_stab	-20	-	+20	ppm	Inclusive of initial tolerance at 25°C, 1st year aging at 25°C,
	_	-25	-	+25	ppm	and variations over operating temperature, rated power supply voltage and load.
		-50	-	+50	ppm	Supply voltage and load.
	•		Operati	ing Tempera	ature Rang	e
Operating Temperature Range	T use	-20	-	+70	°C	Extended Commercial
		-40	-	+85	°C	Industrial
	•	S	upply Volta	ge and Curr	ent Consu	mption
Supply Voltage Options	Vdd_1.8	1.62	1.8	1.98	V	Contact SiTime for 1.5 V support
	Vdd 2.5	2.25	2.5	2.75	V	
	Vdd 2.8	2.52	2.8	3.08	V	
	Vdd 3.0	2.7	3.0	3.3	V	
	Vdd 3.3	2.97	3.3	3.63	V	
	Vdd XX	2.25	_	3.63	V	1
	Vdd YY	1.62	_	3.63	V	-
Current Consumption	Idd	-	3.8	4.5	mA	No load condition, f = 20 MHz, Vdd_2.8, Vdd_3.0, Vdd_3.3, Vdd_XX, Vdd_YY
		-	3.7	4.2	mA	No load condition, f = 20 MHz, Vdd_2.5
		-	3.5	4.1	mA	No load condition, f = 20 MHz, Vdd_1.8
OE Disable Current	I_OD	-	-	4.2	mA	Vdd_2.5, Vdd_2.8, Vdd_3.0, Vdd_3.3, Vdd_XX, Vdd_YY. OE = GND, Output in high-Z state
		-	-	4.0	mA	Vdd_1.8. OE = GND, Output in high-Z state
Standby Current	I_std	I	2.6	4.3	μΑ	ST = GND, Vdd_2.8, Vdd_3.0, Vdd_3.3, Vdd_XX, Vdd_YY. Output is weakly pulled down
		-	1.4	2.5	μΑ	ST = GND, Vdd_2.5, Output is weakly pulled down
		-	0.6	1.3	μA	ST = GND, Vdd_1.8, Output is weakly pulled down

## Applications

- Ideal for DSC, DVC, DVR, IP CAM, Tablets, e-Books, SSD, GPON, EPON, etc
- Ideal for high-speed serial protocols such as: USB, SATA, SAS, Firewire, 100M/1G/10G Ethernet, etc.




#### Table 1. Electrical Characteristics (continued)

Parameters	Symbol	Min.	Тур.	Max.	Unit	Condition
			LVCMOS	Output Cha	aracteristics	
Duty Cycle	DC	45	-	55	%	All Vdds. See Duty Cycle definition in Figure 3 and Footnote 6
Rise/Fall Time	Tr, Tf	-	1	2	ns	20% - 80% Vdd_2.5, Vdd_2.8, Vdd_3.0, Vdd_3.3
		-	1.3	2.5	ns	20% - 80% Vdd_1.8
		-	-	2	ns	20% - 80% Vdd_XX
		-	-	2.7	ns	20% - 80% Vdd_YY
Output High Voltage	VOH	90%	-	-	Vdd	IOH = -4 mA (Vdd_3.0 and Vdd_3.3) IOH = -3 mA (Vdd_2.8 and Vdd_2.5) IOH = -2 mA (Vdd_1.8)
Output Low Voltage	VOL	-	-	10%	Vdd	IOH = -4 mA (Vdd_3.0 and Vdd_3.3) IOH = -3 mA (Vdd_2.8 and Vdd_2.5) IOH = -2 mA (Vdd_1.8)
			Inpu	t Characte	ristics	
Input High Voltage	VIH	70%	-	-	Vdd	Pin 1, OE or ST
Input Low Voltage	VIL	-	-	30%	Vdd	Pin 1, OE or ST
Input Pull-up Impedance	Z_in	50	87	150	kΩ	Pin 1, OE logic high or logic low, or ST logic high
		2	-	-	MΩ	Pin 1, ST logic low
			Startup	and Resun	ne Timing	
Startup Time	T_start	-	-	5	ms	Measured from the time Vdd reaches its rated minimum value
Enable/Disable Time	T_oe	-	-	138	ns	f = 77.76 MHz. For other frequencies, T_oe = 100 ns + 3*cycles
Resume Time	T_resume	-	-	5	ms	Measured from the time ST pin crosses 50% threshold
				Jitter		
RMS Period Jitter	T_jitt	-	1.8	3	ps	f = 75 MHz, Vdd_1.8, Vdd_2.5, Vdd_2.8, Vdd_3.0, Vdd_3.3, Vdd_XX,
		-	-	3.3	ps	f = 75 MHz, Vdd_YY
Peak-to-peak Period Jitter	T_pk	-	12	25	ps	f = 75 MHz, Vdd_2.5, Vdd_2.8, Vdd_3.0, Vdd_3.3, Vdd_XX, Vdd_YY
		-	14	30	ps	f = 75 MHz, Vdd_1.8
RMS Phase Jitter (random)	T_phj	-	0.5	0.9	ps	f = 75 MHz, Integration bandwidth = 900 kHz to 7.5 MHz. Vdd_1.8, Vdd_2.5, Vdd_2.8, Vdd_3.0, Vdd_3.3, Vdd_XX
		-	1.3	2	ps	f = 75 MHz, Integration bandwidth = 12 kHz to 20 MHz. Vdd_1.8, Vdd_2.5, Vdd_2.8, Vdd_3.0, Vdd_3.3, Vdd_XX
		-	-	1.4	ps	f = 75 MHz, Integration bandwidth = 900 kHz to 7.5 MHz. Vdd_YY
		-	-	2.3	ps	$f$ = 75 MHz, Integration bandwidth = 12 kHz to 20 MHz. Vdd_YY

### Table 2. Pin Description

Pin	Symbol		Functionality	Top Vie
		Output Enable	H <sup>[1]</sup> : specified frequency output L: output is high impedance. Only output driver is disabled.	
1	OE/ST/NC	Standby	H <sup>[1]</sup> : specified frequency output L: output is low (weak pull down). Device goes to sleep mode. Supply current reduces to I_std.	OE/ST/NC 1
		No Connect	Any voltage between 0 and Vdd or Open <sup>[1]</sup> : Specified frequency output. Pin 1 has no function.	
2	GND	Power	Electrical ground	GND <sup>2</sup>
3	OUT	Output	Oscillator output	
4	VDD	Power	Power supply voltage <sup>[2]</sup>	Figure 1. Pin Ass



#### signments

#### Notes:

- 1. In OE or ST mode, a pull-up resistor of 10 kΩ or less is recommended if pin 1 is not externally driven. If pin 1 needs to be left floating, use the NC option.
- 2. A capacitor of value 0.1  $\mu F$  or higher between Vdd and GND is required.





#### **Table 3. Absolute Maximum Limits**

Attempted operation outside the absolute maximum ratings may cause permanent damage to the part. Actual performance of the IC is only guaranteed within the operational specifications, not at absolute maximum ratings.

Parameter	Min.	Max.	Unit
StorageTemperature	-65	150	°C
Vdd	-0.5	4	V
Electrostatic Discharge	-	2000	V
Soldering Temperature (follow standard Pb free soldering guidelines)	-	260	°C
Junction Temperature <sup>[3]</sup>	-	150	°C

Note:

3. Exceeding this temperature for extended period of time may damage the device.

#### Table 4. Thermal Consideration<sup>[4]</sup>

Package	θJA, 4 Layer Board (°C/W)	θJA, 2 Layer Board (°C/W)	θJC, Bottom (°C/W)
7050	142	273	30
5032	97	199	24
3225	109	212	27
2520	117	222	26
2016	152	252	36

Note:

4. Refer to JESD51 for  $\theta$ JA and  $\theta$ JC definitions, and reference layout used to determine the  $\theta$ JA and  $\theta$ JC values in the above table.

#### Table 5. Maximum Operating Junction Temperature<sup>[5]</sup>

Max Operating Temperature (ambient)	Maximum Operating Junction Temperature
70°C	80°C
85°C	95°C

Note:


5. Datasheet specifications are not guaranteed if junction temperature exceeds the maximum operating junction temperature.

#### Table 6. Environmental Compliance

Parameter	Condition/Test Method		
Mechanical Shock	MIL-STD-883F, Method 2002		
Mechanical Vibration	MIL-STD-883F, Method 2007		
Temperature Cycle	JESD22, Method A104		
Solderability	MIL-STD-883F, Method 2003		
Moisture Sensitivity Level	MSL1 @ 260°C		



## Test Circuit and Waveform<sup>[6]</sup>







#### Note:

6. Duty Cycle is computed as Duty Cycle = TH/Period.

# **Timing Diagrams**



#### Figure 4. Startup Timing (OE/ ST Mode)



T\_oe: Time to re-enable the clock output

#### Figure 6. OE Enable Timing (OE Mode Only)

#### Note:

7. SiT1602 has "no runt" pulses and "no glitch" output during startup or resume.






Figure 3. Waveform



#### Figure 5. Standby Resume Timing (ST ModeOnly)





T\_oe: Time to put the output in High Z mode

#### Figure 7. OE Disable Timing (OE Mode Only)



## Performance Plots<sup>[8]</sup>








Figure 10. RMS Period Jitter vs Frequency




Figure 12. 20%-80% Rise Time vs Temperature




Figure 9. Frequency vs Temperature




Figure 11. Duty Cycle vs Frequency





Figure 13. 20%-80% Fall Time vs Temperature




80

# Performance Plots<sup>[8]</sup> (continued)

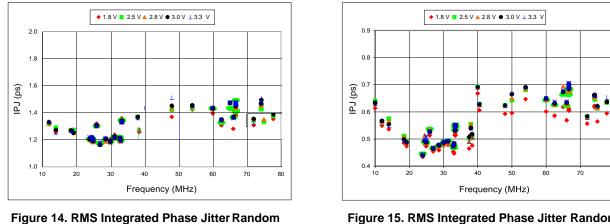

(12 kHz to 20 MHz) vs Frequency<sup>[9]</sup>



Notes:

8. All plots are measured with 15 pF load at room temperature, unless otherwise stated.

9. Phase noise plots are measured with Agilent E5052B signal source analyzer. Integration range is up to 5 MHz for carrier frequencies below 40 MHz.

# Programmable Drive Strength

The SiT1602 includes a programmable drive strength feature to provide a simple, flexible tool to optimize the clock rise/fall time for specific applications. Benefits from the programmable drive strength feature are:

- Improves system radiated electromagnetic interference (EMI) by slowing down the clock rise/fall time
- Improves the downstream clock receiver's (RX) jitter by decreasing (speeding up) the clock rise/fall time.
- Ability to drive large capacitive loads while maintaining full swing with sharp edge rates.

For more detailed information about rise/fall time control and drive strength selection, see the SiTime Application Notes section.

#### **EMI Reduction by Slowing Rise/Fall Time**

Figure 16 shows the harmonic power reduction as the rise/fall times are increased (slowed down). The rise/fall times are expressed as a ratio of the clock period. For the ratio of 0.05, the signal is very close to a square wave. For the ratio of 0.45, the rise/fall times are very close to near-triangular waveform. These results, for example, show that the 11<sup>th</sup> clock harmonic can be reduced by 35 dB if the rise/fall edge is increased from 5% of the period to 45% of the period.




Figure 16. Harmonic EMI reduction as a Function of Slower Rise/Fall Time

#### Jitter Reduction with Faster Rise/Fall Time

Power supply noise can be a source of jitter for the downstream chipset. One way to reduce this jitter is to speed up the rise/fall time of the input clock. Some chipsets may also require faster rise/fall time in order to reduce their sensitivity to this type of jitter. Refer to the Rise/Fall Time Tables (Table 7 to Table 11) to determine the proper drive strength.

#### **High Output Load Capability**

The rise/fall time of the input clock varies as a function of the actual capacitive load the clock drives. At any given drive strength, the rise/fall time becomes slower as the output load increases. As an example, for a 3.3 V SiT1602 device with default drive strength setting, the typical rise/fall time is 1 ns for 15 pF output load. The typical rise/fall time slows down to 2.6 ns when the output load increases to 45 pF. One can choose to speed up the rise/fall time to 1.83 ns by then increasing the drive strength setting on the SiT1602.

The SiT1602 can support up to 60 pF or higher in maximum capacitive loads with drive strength settings. Refer to the Rise/Fall Time Tables (Table 7 to 11) to determine the proper drive strength for the desired combination of output load vs. rise/fall time.

#### SiT1602 Drive Strength Selection

Tables 7 through 11 define the rise/fall time for a given capacitive load and supply voltage.

- 1. Select the table that matches the SiT1602 nominal supply voltage (1.8 V, 2.5 V, 2.8 V, 3.0 V, 3.3 V).
- 2. Select the capacitive load column that matches the application requirement (5 pF to 60 pF)
- **3.** Under the capacitive load column, select the desired rise/fall times.
- 4. The left-most column represents the part number code for the corresponding drive strength.
- **5.** Add the drive strength code to the part number for ordering purposes.

#### **Calculating Maximum Frequency**

Any given rise/fall time in Table 7 through 11 dictates the maximum frequency under which the oscillator can operate with guaranteed full output swing over the entire operating temperature range. This max frequency can be calculated as the following:

Max Frequency = 
$$\frac{1}{5 \text{ x Trf}_{20/80}}$$

where  ${\rm Trf}\_20/80$  is the typical value for 20%-80% rise/fall time.

#### Example 1

Calculate f<sub>MAX</sub> for the following condition:

- Vdd = 1.8 V (Table 7)
- Capacitive Load: 30 pF
- Desired Tr/f time = 3 ns (rise/fall time part number code = E)
- f<sub>MAX</sub> = 66.666660

Part number for the above example:

#### SiT1602BIE12-18E-66.666660

1

Drive strength code is inserted here. Default setting is "-"



# Rise/Fall Time (20% to 80%) vs CLOAD Tables

Table 7. Vdd = 1.8 V (Vdd\_1.8) Rise/Fall Times for Specific  $C_{LOAD}$ 

Rise/Fall Time Typ (ns)							
Drive Strength $\C_{LOAD}$	5 pF	15 pF	30 pF	45 pF	60 pF		
L	6.16	11.61	22.00	31.27	39.91		
А	3.19	6.35	11.00	16.01	21.52		
R	2.11	4.31	7.65	10.77	14.47		
В	1.65	3.23	5.79	8.18	11.08		
Т	0.93	1.91	3.32	4.66	6.48		
E	0.78	1.66	2.94	4.09	5.74		
U	0.70	1.48	2.64	3.68	5.09		
F or "-": default	0.65	1.30	2.40	3.35	4.56		

# Table 9. Vdd = 2.8 V (Vdd\_2.8) Rise/Fall Times for Specific CLOAD

Rise/Fall Time Typ (ns)							
Drive Strength $\ C_{LOAD}$	5 pF	15 pF	30 pF	45 pF	60 pF		
L	3.77	7.54	12.28	19.57	25.27		
А	1.94	3.90	7.03	10.24	13.34		
R	1.29	2.57	4.72	7.01	9.06		
В	0.97	2.00	3.54	5.43	6.93		
Т	0.55	1.12	2.08	3.22	4.08		
E or "-": default	0.44	1.00	1.83	2.82	3.67		
U	0.34	0.88	1.64	2.52	3.30		
F	0.29	0.81	1.48	2.29	2.99		

# Table 11. Vdd = 3.3 V (Vdd\_3.3) Rise/Fall Times for Specific CLOAD

Rise/Fall Time Typ (ns)								
Drive Strength $\ C_{LOAD}$	5 pF	15 pF	30 pF	45 pF	60 pF			
L	3.39	6.88	11.63	17.56	23.59			
А	1.74	3.50	6.38	8.98	12.19			
R	1.16	2.33	4.29	6.04	8.34			
В	0.81	1.82	3.22	4.52	6.33			
T or "-": default	0.46	1.00	1.86	2.60	3.84			
E	0.33	0.87	1.64	2.30	3.35			
U	0.28	0.79	1.46	2.05	2.93			
F	0.25	0.72	1.31	1.83	2.61			

# Table 8. Vdd = 2.5 V (Vdd\_2.5) Rise/Fall Times for Specific CLOAD

Rise/Fall Time Typ (ns)							
Drive Strength $C_{LOAD}$	5 pF	15 pF	30 pF	45 pF	60 pF		
L	4.13	8.25	12.82	21.45	27.79		
А	2.11	4.27	7.64	11.20	14.49		
R	1.45	2.81	5.16	7.65	9.88		
В	1.09	2.20	3.88	5.86	7.57		
Т	0.62	1.28	2.27	3.51	4.45		
E or "-": default	0.54	1.00	2.01	3.10	4.01		
U	0.43	0.96	1.81	2.79	3.65		
F	0.34	0.88	1.64	2.54	3.32		

# Table 10. Vdd = 3.0 V (Vdd\_3.0) Rise/Fall Times for Specific CLOAD

Rise/Fall Time Typ (ns)						
Drive Strength $\ C_{LOAD}$	5 pF	15 pF	30 pF	45 pF	60 pF	
L	3.60	7.21	11.97	18.74	24.30	
А	1.84	3.71	6.72	9.86	12.68	
R	1.22	2.46	4.54	6.76	8.62	
В	0.89	1.92	3.39	5.20	6.64	
T or "-": default	0.51	1.00	1.97	3.07	3.90	
E	0.38	0.92	1.72	2.71	3.51	
U	0.30	0.83	1.55	2.40	3.13	
F	0.27	0.76	1.39	2.16	2.85	

# **Si**Time

# Pin 1 Configuration Options (OE, ST, or NC)

Pin 1 of the SiT1602 can be factory-programmed to support three modes: Output Enable (OE), standby  $(\overline{ST})$  or No Connect (NC). These modes can also be programmed with the Time Machine using field programmable devices.

#### Output Enable (OE) Mode

In the OE mode, applying logic Low to the OE pin only disables the output driver and puts it in Hi-Z mode. The core of the device continues to operate normally. Power consumption is reduced due to the inactivity of the output. When the OE pin is pulled High, the output is typically enabled in <1  $\mu$ s.

### Standby (ST) Mode

In the  $\overline{ST}$  mode, a device enters into the standby mode when Pin 1 pulled Low. All internal circuits of the device are turned off. The current is reduced to a standby current, typically in the range of a few  $\mu$ A. When  $\overline{ST}$  is pulled High, the device goes through the "resume" process, which can take up to 5 ms.

#### No Connect (NC) Mode

In the NC mode, the device always operates in its normal mode and outputs the specified frequency regardless of the logic level on pin 1.

Table 12 below summarizes the key relevant parameters in the operation of the device in OE, ST, or NC mode.

	OE	ST	NC
Active current 20 MHz (max, 1.8 V)	4.1 mA	4.1 mA	4.1 mA
OE disable current (max. 1.8 V)	4 mA	N/A	N/A
Standby current (typical 1.8 V)	N/A	0.6 µA	N/A
OE enable time at 77.76 MHz (max)	138 ns	N/A	N/A
Resume time from standby (max, all frequency)	N/A	5 ms	N/A
Output driver in OE disable/standby mode	High Z	weak pull-down	N/A

#### Table 12. OE vs. ST vs. NC

#### **Output on Startup and Resume**

The SiT1602 comes with gated output. Its clock output is accurate to the rated frequency stability within the first pulse from initial device startup or resume from the standby mode.

In addition, the SiT1602 features "no runt" pulses and "no glitch" output during startup or resume as shown in the waveform captures in Figure 17 and Figure 18.



Figure 17. Startup Waveform vs. Vdd




Figure 18. Startup Waveform vs. Vdd (Zoomed-in View of Figure 17)

# Instant Samples with Time Machine and Field Programmable Oscillators

SiTime supports a field programmable version of the SiT1602 low power oscillator for fast prototyping and real time customization of features. The field programmable devices (FP devices) are available for all five standard SiT1602 package sizes and can be configured to one's exact specification using the Time Machine II, an USB powered MEMS oscillator programmer.

# Customizable Features of the SiT1602 FP Devices Include


- 52 standard frequencies between 3.75 MHz and 77.76 MHz (Refer to the frequency list on page 12)
- Three frequency stability options, ±20 ppm, ±25 ppm, ±50 ppm
- Two operating temperatures, -20 to 70°C or -40 to 85°C
- Six supply voltage options, 1.8 V, 2.5 V, 2.8 V, 3.0 V, 3.3 V, 2.25 to 3.65 V, and 1.62 to 3.63 V continuous
- Output drive strength
- OE, ST or NC mode

For more information regarding SiTime's field programmable solutions, see Time Machine II and Field Programmable Oscillators.

SiT1602 is typically factory-programmed per customer ordering codes for volume delivery.




### **Dimensions and Patterns**

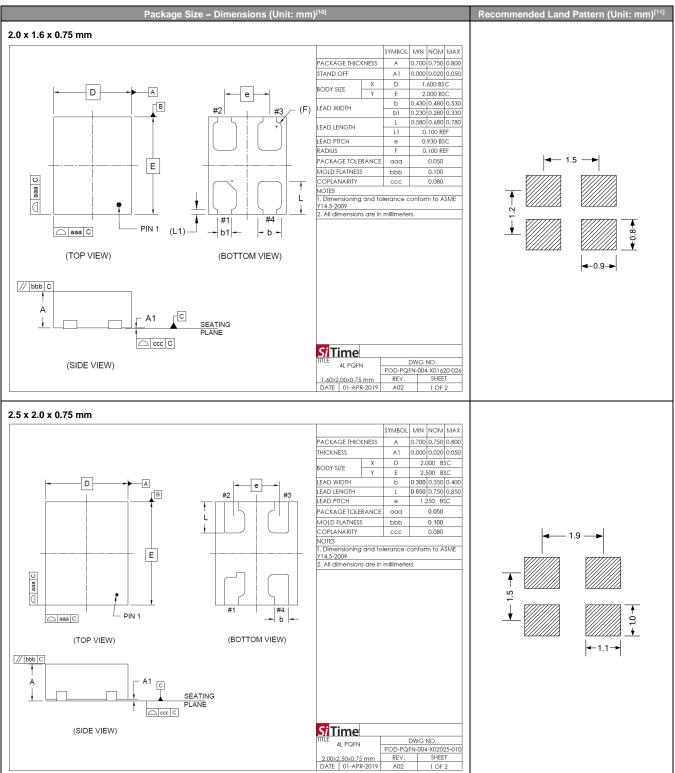




#### **Dimensions and Patterns (continued)**

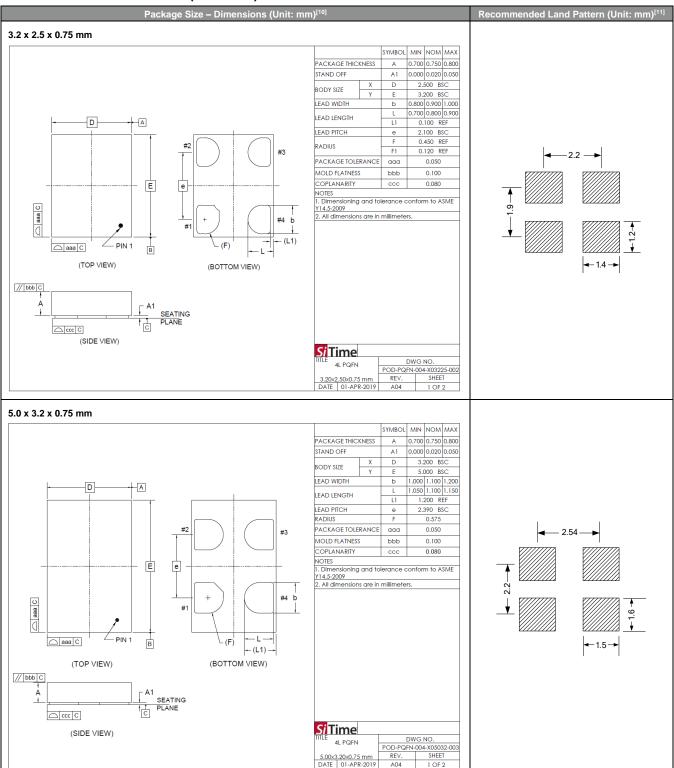



### **Dimensions and Patterns (continued)**

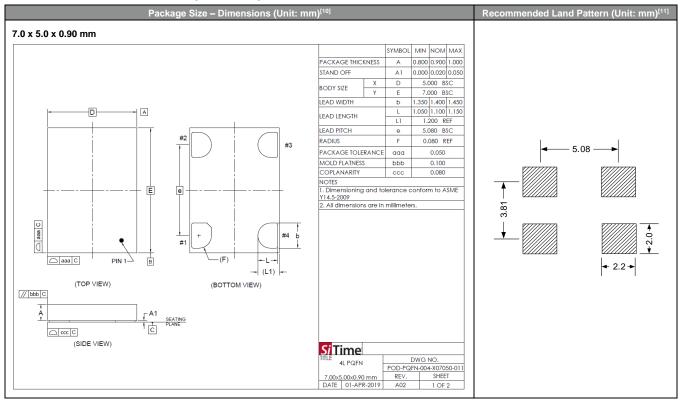


#### Notes:

- 10. Top marking: Y denotes manufacturing origin and XXXX denotes manufacturing lot number. The value of "Y" will depend on the assembly location of the device.
- 11. A capacitor of value 0.1  $\mu F$  or higher between Vdd and GND is required.

# **Ordering Information**

The Part No. Guide is for reference only.

To customize and build an exact part number, use the SiTime Part Number Generator.

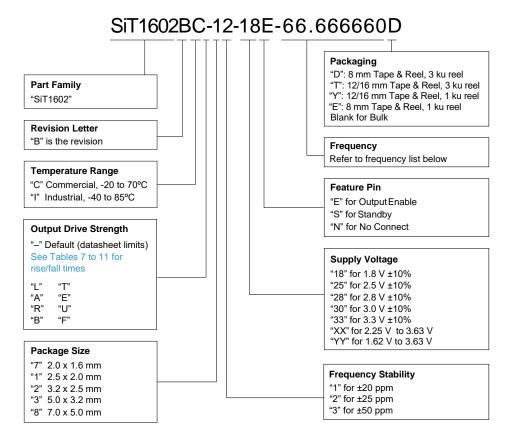

#### Table 13. List of Supported Frequencies

3.57 MHz	4 MHz	4.096 MHz	6 MHz	7.3728 MHz	8.192 MHz	10 MHz	12 MHz	14 MHz
18.432 MHz	19.2 MHz	20 MHz	24 MHz	24.576 MHz	25 MHz	25.000625 MHz	26 MHz	27 MHz
28.6363 MHz	30 MHz	31.25 MHz	32.768 MHz	33 MHz	33.3 MHz	33.33 MHz	33.333 MHz	33.3333 MHz
33.33333 MHz	35.84 MHz	37.5 MHz	38 MHz	38.4 MHz	40 MHz	40.5 MHz	48 MHz	50 MHz
54 MHz	60 MHz	62.5 MHz	65 MHz	66 MHz	66.6 MHz	66.66 MHz	66.666 MHz	66.6666 MHz
66.66666 MHz	72 MHz	74.175824 MHz	74.176 MHz	74.25 MHz	75 MHz	77.76 MHz		

Table 14. Ordering Codes for Supported Tape & Reel Packing Method

Device Size (mm x mm)	16 mm T&R (3 ku)	16 mm T&R (1 ku)	12 mm T&R (3 ku)	12 mm T&R (1 ku)	8 mm T&R (3 ku)	8 mm T&R (1 ku)
2.0 x 1.6	-	-	-	-	D	E
2.5 x 2.0	-	-	-	-	D	E
3.2 x 2.5	-	-	-	-	D	E
5.0 x 3.2	-	-	т	Y	_	-
7.0 x 5.0	Т	Y	-	-	-	-



#### Table 15. Additional Information

Document	Description	Download Link	
Time Machine II	MEMS oscillator programmer	http://www.sitime.com/support/time-machine-oscillator-programmer	
Field Programmable Oscillators	Devices that can be programmable in the field by Time Machine II	http://www.sitime.com/products/field-programmable-oscillators	
Manufacturing Notes	Tape & Reel dimension, reflow profile and other manufacturing related info	https://www.sitime.com/sites/default/files/gated/Manufacturing-Notes- for-SiTime-Products.pdf	
Qualification Reports	RoHS report, reliability reports, composition reports	http://www.sitime.com/support/quality-and-reliability	
Performance Reports	Additional performance data such as phase noise, current consumption and jitter for selected frequencies	http://www.sitime.com/support/performance-measurement-report	
Termination Techniques	Termination design recommendations	http://www.sitime.com/support/application-notes	
Layout Techniques	Layout recommendations	http://www.sitime.com/support/application-notes	

#### Table 16. Revision History

Revision	Release Date	Change Summary
0.9	1-Apr-2014	Preliminary
1.0	14-May-2014	Removed preliminary Updated max spec for current consumption and OE disable current Updated the maximum operating junction temperature Updated the current consumption and OE disable current in Table 12 Updated performance plots 8 and 10 Revised the formula for calculating the max frequency with different rise/fall time options
1.01	7-May-2015	Added 20 MHz to the frequency selection Revised the Electrical Characteristics, Timing Diagrams and Performance Plots Revised 2016 PKG diagram
1.02	18-Jun-2015	Added 16 mm T&R information to Table 14 Revised 12 mm T&R information to Table 14
1.03	30-Aug-2016	Revised part number example in the ordering information
1.04	9-Jan-2018	Updated logo and company address, other page layout changes Revised 2520 package land pattern
1.05	8-Jul-2020	Updated ordering information with "YY" supply voltage option Updated ordering information with note
1.06	27-Jan-2021	Removed Note 12 Added Rise/Fall Time, RMS Period Jitter, and RMS Phase Jitter specifications for "YY" supply voltage Various formatting changes
1.07	10-Mar-2021	Updated Dimensions and Patterns drawings Updated hyperlinks, trademarks and changed rev table date format

#### SiTime Corporation, 5451 Patrick Henry Drive, Santa Clara, CA 95054, USA | Phone: +1-408-328-4400 | Fax: +1-408-328-4439

© SiTime Corporation 2014-2021. The information contained herein is subject to change at any time without notice. SiTime assumes no responsibility or liability for any loss, damage or defect of a Product which is caused in whole or in part by (i) use of any circuitry other than circuitry embodied in a SiTime product, (ii) misuse or abuse including static discharge, neglect or accident, (iii) unauthorized modification or repairs which have been soldered or altered during assembly and are not capable of being tested by SiTime under its normal test conditions, or (iv) improper installation, storage, handling, warehousing or transportation, or (v) being subjected to unusual physical, thermal, or electrical stress.

Disclaimer: SiTime makes no warranty of any kind, express or implied, with regard to this material, and specifically disclaims any and all express or implied warranties, either in fact or by operation of law, statutory or otherwise, including the implied warranties of merchantability and fitness for use or a particular purpose, and any implied warranty arising from course of dealing or usage of trade, as well as any common-law duties relating to accuracy or lack of negligence, with respect to this material, any SiTime product and any product documentation. Products sold by SiTime are not suitable or intended to be used in a life support application or component, to operate nuclear facilities, or in other mission critical applications where human life may be involved or at stake. All sales are made conditioned upon compliance with the critical uses policy set forth below.

CRITICAL USE EXCLUSION POLICY

BUYER AGREES NOT TO USE SITIME'S PRODUCTS FOR ANY APPLICATION OR IN ANY COMPONENTS USED IN LIFE SUPPORT DEVICES OR TO OPERATE NUCLEAR FACILITIES OR FOR USE IN OTHER MISSION-CRITICAL APPLICATIONS OR COMPONENTS WHERE HUMAN LIFE OR PROPERTY MAY BE AT STAKE.

SiTime owns all rights, title and interest to the intellectual property related to SiTime's products, including any software, firmware, copyright, patent, or trademark. The sale of SiTime products does not convey or imply any license under patent or other rights. SiTime retains the copyright and trademark rights in all documents, catalogs and plans supplied pursuant to or ancillary to the sale of products or services by SiTime. Unless otherwise agreed to in writing by SiTime, any reproduction, modification, translation, compilation, or representation of this material shall be strictly prohibited.



# **Supplemental Information**


The Supplemental Information section is not part of the datasheet and is for informational purposes only.


#### **Best Reliability**

Silicon is inherently more reliable than quartz. Unlike quartz suppliers, SiTime has in-house MEMS and analog CMOS expertise, which allows SiTime to develop the most reliable products. Figure 1 shows a comparison with quartz technology.

#### Why is SiTime MEMS Best in Class:

- SiTime's MEMS resonators are vacuum sealed using an advanced EpiSeal<sup>™</sup> process, which eliminates foreign particles and improves long term aging and reliability
- World-class MEMS and CMOS design expertise





#### Best Aging

Unlike quartz, MEMS oscillators have excellent long term aging performance which is why every new SiTime product specifies 10-year aging. A comparison is shown in Figure 2.

#### Why is SiTime Best in Class:

- SiTime's MEMS resonators are vacuum sealed using an advanced EpiSeal<sup>™</sup> process, which eliminates foreign particles and improves long term aging and reliability
- Inherently better immunity of electrostatically driven MEMS resonator




Figure 2. Aging Comparison<sup>[2]</sup>

#### Best Electro Magnetic Susceptibility (EMS)

SiTime's oscillators in plastic packages are up to 54 times more immune to external electromagnetic fields than quartz oscillators as shown in Figure 3.

#### Why is SiTime Best in Class:

- Internal differential architecture for best common mode noise rejection
- Electrostatically driven MEMS resonator is more immune to EMS




Figure 3. Electro Magnetic Susceptibility (EMS)<sup>[3]</sup>

#### **Best Power Supply Noise Rejection**

SiTime's MEMS oscillators are more resilient against noise on the power supply. A comparison is shown in Figure 4.

#### Why is SiTime Best in Class:

- On-chip regulators and internal differential architecture for common mode noise rejection
- MEMS resonator is paired with advanced analog CMOS IC




Figure 4. Power Supply Noise Rejection<sup>[4]</sup>



#### **Best Vibration Robustness**

High-vibration environments are all around us. All electronics, from handheld devices to enterprise servers and storage systems are subject to vibration. Figure 5 shows a comparison of vibration robustness.

#### Why is SiTime Best in Class:

- The moving mass of SiTime's MEMS resonators is up to 3000 times smaller than quartz
- Center-anchored MEMS resonator is the most robust design




Figure 5. Vibration Robustness<sup>[5]</sup>

#### Best Shock Robustness

SiTime's oscillators can withstand at least  $50,000 \ g$  shock. They all maintain their electrical performance in operation during shock events. A comparison with quartz devices is shown in Figure 6.

#### Why is SiTime Best in Class:

- The moving mass of SiTime's MEMS resonators is up to 3000 times smaller than quartz
- Center-anchored MEMS resonator is the most robust design




Figure 6. Shock Robustness<sup>[6]</sup>

#### Figure labels:

- TXC = TXC
- Epson = EPSN
- Connor Winfield = CW
- Kyocera = KYCA
- SiLabs = SLAB
- SiTime = EpiSeal MEMS



#### Notes:

- 1. Data source: Reliability documents of named companies.
- Data source: SiTime and quartz oscillator devices datasheets.
  Test conditions for Electro Magnetic Susceptibility (EMS):
- According to IEC EN61000-4.3 (Electromagnetic compatibility standard)
- Field strength: 3V/m
- Radiated signal modulation: AM 1 kHz at 80% depth
- Carrier frequency scan: 80 MHz 1 GHz in 1% steps
- Antenna polarization: Vertical
- DUT position: Center aligned to antenna

#### Devices used in this test:

Label	Manufacturer	Part Number	Technology
EpiSeal MEMS	SiTime	SiT9120AC-1D2-33E156.250000	MEMS + PLL
EPSN	Epson	EG-2102CA156.2500M-PHPAL3	Quartz, SAW
TXC	TXC	BB-156.250MBE-T	Quartz, 3 <sup>rd</sup> Overtone
CW	Conner Winfield	P123-156.25M	Quartz, 3 <sup>rd</sup> Overtone
KYCA	AVX Kyocera	KC7050T156.250P30E00	Quartz, SAW
SLAB	SiLab	590AB-BDG	Quartz, 3 <sup>rd</sup> Overtone + PLL

#### 4. 50 mV pk-pk Sinusoidal voltage.

#### Devices used in this test:

Label	Manufacturer	Part Number	Technology
EpiSeal MEMS	SiTime	SiT8208AI-33-33E-25.000000	MEMS + PLL
NDK	NDK	NZ2523SB-25.6M	Quartz
KYCA	AVX Kyocera	KC2016B25M0C1GE00	Quartz
EPSN	Epson	SG-310SCF-25M0-MB3	Quartz

5. Devices used in this test:

same as EMS test stated in Note 3.

- 6. Test conditions for shock test: MIL-STD-883F Method 2002
  - Condition A: half sine wave shock pulse, 500-g, 1ms
  - Continuous frequency measurement in 100 µs gate time for 10 seconds

Devices used in this test:

same as EMS test stated in Note 3.

7. Additional data, including setup and detailed results, is available upon request to qualified customer. Please contact productsupport@sitime.com.