



DUAL SURFACE MOUNT NPN TRANSISTORS

This device contains two electrically-isolated 2N2222A NPN transistors. The two transistors have well matched hFE and are encapsulated in an ultra-small SOT-563 package. This device is ideal for portable applications where board space is at a premium.


FEATURES

- Electrically Isolated Dual NPN Switching Transistor
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

APPLICATIONS

- General Purpose Amplifier Applications
- Hand-Held Computers, PDAs

Device Marking Code: TU



MAXIMUM RATINGS

 T_{\perp} = 25°C Unless otherwise noted

Rating	Symbol	Value	Units
Collector-Base Voltage	V _{CBO}	75	V
Collector-Emitter Voltage	V_{CEO}	40	V
Emitter-Base Voltage	V _{EBO}	6.0	V
Collector Current	Ic	600	mA
Total Power Dissipation (Note 1)	P_{D}	200	mW
Operating Junction Temperature Range	TJ	-55 to +150	°C
Storage Temperature Range	Tstg	-55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Units
Thermal Resistance, Junction to Ambient (Note 1)	R _{thja}	625	°C/W

Note 1. FR-4 board 60 x 70 x 1mm with minimum recommended pad layout





ELECTRICAL CHARACTERISTICS (Each Transistor) T_J = 25°C Unless otherwise noted

Parameter	Symbol	Conditions	Min	Тур	Max	Units	
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	I _C = 10mA	40	-	-	V	
Collector-Base Breakdown Voltage	V _{(BR)CBO}	I _C = 10uA	75	-	-	V	
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	I _E = 10uA	6.0	-	-	V	
Collector Cutoff Current	I _{CEX}	V _{CE} = 60V, V _{EB} = 3.0V	-	-	10	nA	
Base Cutoff Current	I_{BL}	V _{CE} = 60V, V _{EB} = 3.0V	-	-	20	nA	
	h _{FE}	I c= 0.1mA, V c⊨ 10V	35	-	-		
		I c= 1.0mA, V c⊨ 10V	50	-	-	-	
		I c= 10mA, V c⊨ 10V	75	-	-		
DC Current Gain (Note 2)		I _C =10mA, V _C <u>=</u> 10V, T _J =-55C	50	-	-		
		I c= 150mA, V c⊨ 10V	100	-	300		
		I c= 500mA, V c⊨ 10V	40	-	-		
		I C= 150mA, V CE= 1.0V	35	-	-		
Collector-Emitter Saturation	VCE(SAT)	I _C = 150mA, I _B = 15mA	-	-	0.3	V	
Voltage (Note 2)		I _C = 500mA, I _B = 50mA	-	-	1.0	V	
Base-Emitter Saturation Voltage	V _{BE(SAT)}	I _C = 150mA, I _B = 15mA	0.6	-	1.2	V	
(Note 2)		I _C = 500mA, I _B = 50mA	2.0		2.0		
Gain-Bandwidth Product	f _T	V _{CE} = 20V, I _C = 20mA f = 100MHz	300	-	-	MHz	
Collector-Base Capacitance	Ссво	V _{CB} = 10V, f =1.0MHz	-	-	8.0	pF	
Emitter-Base Capacitance	Сево	V _{EB} = 0.5V, f =1.0MHz	-	-	25	pF	
Delay Time	t d	V _{CC} = 30V, I _C =150mA	-	-	10	ns	
Rise Time	t r	$V_{BE}(off) = -0.5V, I_{B1} = 15mA$	-	-	25	ns	
Storage Time	ts	Vcc= 30V, I c=150mA	-	-	225	ns	
Fall Time	t f	I _{B1} = I _{B2} = 15mA	-	-	60	ns	


Note 2. Short duration test pulse used to minimize self-heating





MMDT2222ATB6





CHARACTERISTICS CURVES (Each Transistor) T_J = 25°C Unless otherwise noted

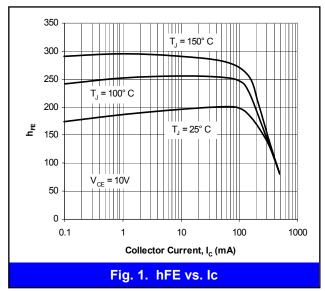

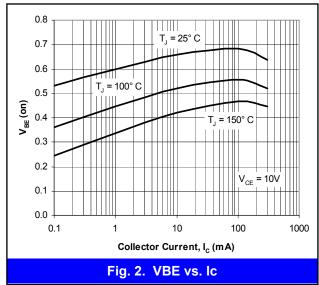

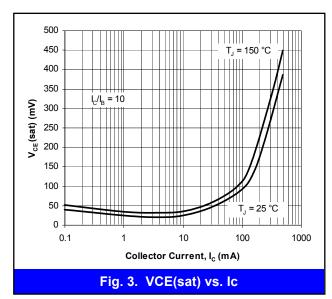

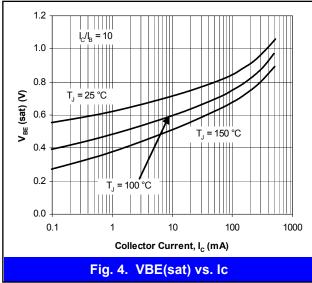


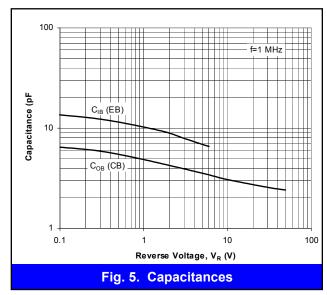






PACKAGE LAYOUT AND SUGGESTED PAD DIMENSIONS

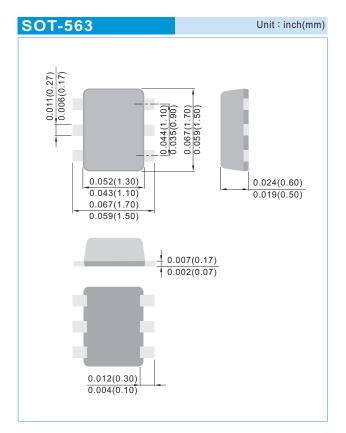

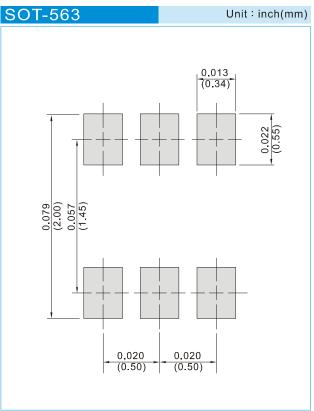

ORDERING INFORMATION

MMDT2222ATB6 T/R7 - 4,000 units per 7 inch reel MMDT2222ATB6 T/R13 -10,000 units per 13 inch reel






MMDT2222ATB6

Part No_packing code_Version

MMDT2222ATB6 _R1_00001 MMDT2222ATB6 _R2_00001

For example:

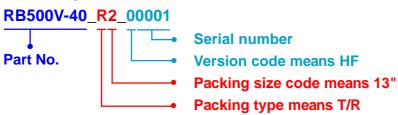

Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	В	13"	2			
Tube Packing (T/P)	Т	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			

April 12,2019-REV.02 PAGE . 5





MMDT2222ATB6

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
 of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
 Customers are responsible in comprehending the suitable use in particular applications.
 Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

April 12,2019-REV.02 PAGE . 6