

TECHNICAL DATASHEET 30W~50W POE application Adapter FSP0XX-DF(W)AN3



FSP0XX-DF(W)AN3 Series

FEATURES

- · Meet IEC 62368-1 & IEC 60950-1
- Meet Energy Efficiency DOE Level VI
- Meet Code of Conduct Version 5 Tier 2
- · High Reliability
- EMC Standard: EN55032/ EN55024 Class B
- Over Current Protection
- Over Temperature Protection
- · Over Voltage Protection

INPUT SPECIFICATIONS

SAFETY STANDARD APPROVAL

See rating chart.

regulation \leq 3Sec

Power turn-on time At 100Vac / full load, output voltage shall remain

remain regulation \geq 8ms



At 100Vac or 240Vac / full load, output voltage shall

component, follow FSP specification (adapter))

100Vac, 240Vac / full load , Shall be less than the rating of adapter critical component (including rectifiers,

DESCRIPTION

This product is 30~50 watts AC to DC adapter intended for use in Consumer Electronic Systems that has a small wattage demands. This adapter operates at 90 to 264 VAC input voltage. The unit meets CISPR32 EN55032 CLASS B, EN55024 and FCC PART 15B Class B emission limits, and is designed for ITE application.

Efficiency:

Hold-up time:

Inrush current:

INPUT SPECIFICATIONS

90-264 VAC Input voltage: Input frequency: 47-63 Hz 100Vac, 240Vac / full load \leq 1.2A Input current: No load power consumption 115Vac, 230Vac \leq 0.075W Touch current: 264Vac / 50Hz \leq 0.25mA


OUTDUT SPECIFICATIONS

OUTPUT SPECIFICATIONS		Operating altitude:	futing of adapter childra component (including rectiners, fuse surge and current limiting device) 5000 meters above sea level
Output voltage/current: Total output power:	See rating chart See rating chart	withstand voltage.	Between AC input and secondary applied DC 4242V, test time 1 minute, cut off current shall be less
Protection: Over voltage:	The adapter will enter into shut down	MTBF:	than 10mA 100Vac, 240Vac / full load , 300,000 hours at 25°C,
-	that means no output while over voltage happened at output terminal that caused by internal fault, the output trip voltage shall not exceed 63 vlots. That will be return to normal state by AC reset.	EMC Performance: EN55032 FCC	Class B conducted, class B radiated
		VCCI EN61000-3-2	Class B conducted, class B radiated Class B conducted, class B radiated Meet class D
Short circuit & Over current:	When an internal fault occurs, or an external fault is applied to the output, the power supply shall shut down and	EN61000-3-3 EN61000-4-2	Meet regulation Air discharge: ±8 KV,contact discharge: ±4KV, meet criterion A
Over temperature:	enter auto-recovery mode. The power supply will enter into shut down while the abnormal thermal rise occurs.That will be return to normal	EN61000-4-3 EN61000-4-4 EN61000-4-5	80 ~1000 MHz,3V/m,80% AM(1kHz), meet criterion A Impulse: ±1kV applied to L,N,meet criterion A ± 1kV applied differential mode, ±2kV applied common
Brown-out Environment Working TEMP.	state by AC reset. Set at 50Vac~60Vac	EN61000-4-6 EN61000-4-8 EN61000-4-11	mode,meet criterion A 0.15 ~ 80 MHz,3Vrms, 80% AM(1kHz),meet criterion A 50 Hz or 60Hz, 1A/m, meet criterion A Voltage Dips :
Storage TEMP. Working Humidity Storage Humidity	0~70°C (> 40°C de-rating) -20~+80°C 20~80% RH non-condensing 10~90% RH non-condensing	Power de-rating:	 >95% reduction for 0.5 period,meet criterion B 30% reduction for 25 period,meet criterion C Voltage Interruptions : >95% reduction for 250 period,meet criterion C 100Vac or 240Vac, 0°C to 40°C,100% load, 50°C, 85% load, 60°C, 70% load, 70°C, 55% load (Shall be less than the rating of adapter critical




TECHNICAL DATASHEET 30W~50W POE application Adapter FSP0XX-DF(W)AN3

INPUT VOLTAGE DERATING CURVE

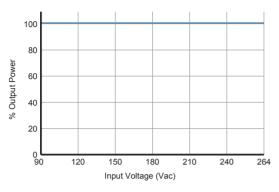



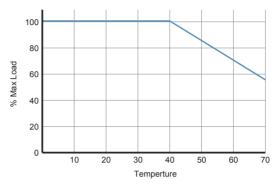


OUTPUT VOLTAGE/CURRENT RATING CHART

Model	Output Voltage	Output Current	AC Inlet	Efficiency	
				DOE(Level VI)	CoC V5 (Tier 2)
FSP030-DFAN3	48V	0.625A	C14	≥86.95%	≥87.70%
FSP030-DWAN3	54V	0.56A	C14	≥86.95%	≥87.70%
FSP040-DFAN3	48V	0.83A	C14	≥87.59%	≥88.59%
FSP040-DWAN3	54V	0.74A	C14	≥87.59%	≥88.59%
FSP050-DFAN3	48V	1.042A	C14	≥88%	≥89.0%
FSP050-DWAN3	54V	0.93A	C14	≥88.0%	≥88.59%




TECHNICAL DATASHEET **30W~50W POE application Adapter** FSP0XX-DF(W)AN3

MECHANICAL SPECIFICATIONS

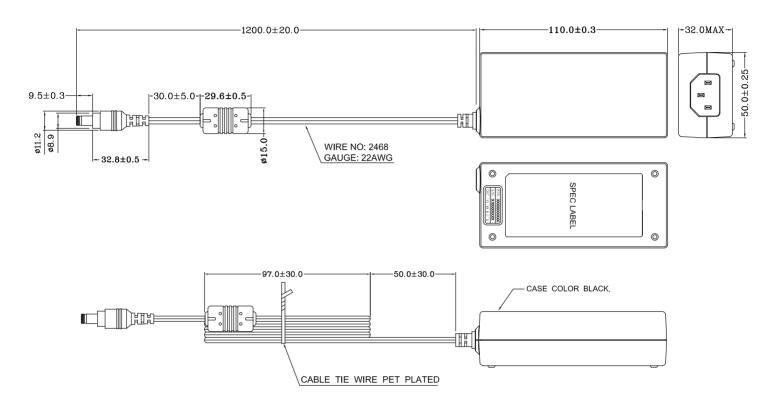

CONNECTOR SPECIFICATIONS

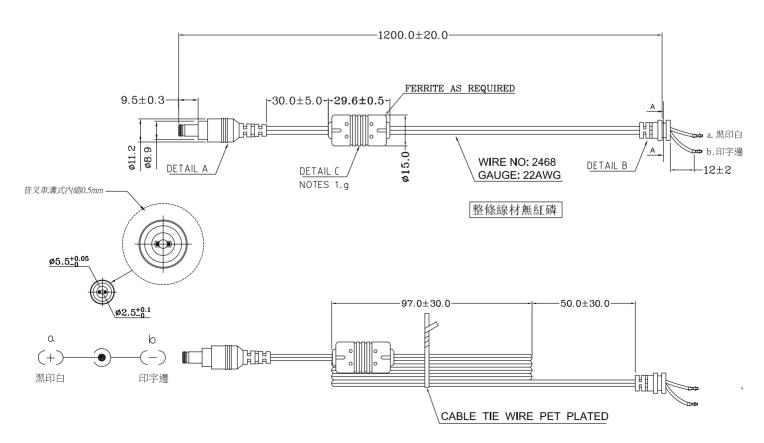

3

© 2019 FSP Group. All Rights Reserved. All trademarks are registered to their respective owners.