

## 6-mm carbon SMD potentiometer

The PS-6 potentiometer offers control where frequent adjustment is required. The shaftless design allows for employment of different engagement mechanisms, such as a customized shaft, a motor control or a human interface adjustment. This potentiometer can also control variable outputs including frequency, change in motor speed or volume.



## **KEY FEATURES**

- ▶ Designed for lead-free reflow soldering processes
- ► Excellent performance
- ► Carbon resistive element
- ▶ Up to 10 mechanical detents
- ▶ 1.000 life cycles
- ▶ IP54 protection
- ► Moisture sensitivity level 1
- ► Embossed tape packaging
- ▶ Wiper positioned at initial, 50% or fully clockwise
- ▶ Loose and assembled knobs, shafts available separately
- ► Self extinguishable plastic UL 94V-0

<b>ELECTRICAL SPECIFICATIONS</b>

Taper*	Linear
Range of values*	1KΩ ≤ Rn ≤ 1,5MΩ
	Decad. 1.0-2.0-2.2-2.5-4.7-5.0
Tolerance*	
$1K\Omega \le Rn \le 500K\Omega$	± 30%
$500$ KΩ $\leq$ Rn $\leq$ 1.5MΩ	+ 50% / - 30%
Max voltage	100 VDC
Nominal power @ 50°C	0.1 W
Residual resistance	≤ 0.5% Rn
Equivalent noise resistance	≤ 4.5% Rn
Operating temperature	-40°C to +85°C
* Others available on request	

#### **APPLICATIONS**

- ► Appliance program selection
- ► Thermostat adjustment
- ► Timer and control relays
- ▶ Consumer electronics
- ▶ Power tool controls
- ► Test and measurement equipment

#### Others available on request

MECHANICAL SPECIFICATIONS	
Mechanical rotation angle	235° ± 5°
Electrical rotation angle	200° ± 20°
Torque Rotational Stop	0.2 to 2 Ncm (0.3 to 2.7 in-oz) > 4 Ncm (>7 in-oz)
Push-pull force over the rotor	> 5 N
Life*	1k cycles

<sup>\*</sup> Others available on request

## 6-mm carbon SMD potentiometer


## **ENVIRONMENTAL TESTING**

	Test conditions (CEI 393-1)	ΔR(%) - Typical test results
Electrical life	1.000h at 50°C; 0.25 W	±10%
Mechanical life	1000 cycles at 10 to15 cpm	±10%
Temperature coefficient	−25° C; +85° C	±1.500 ppm/°C
Thermal cycling	16h at 85°C and 2h at -25°C	±5%
Damp heat	500h at 40°C and 95% relative humidity (RH)	±15%
Vibration	2h each plane at 10Hz - 55Hz	±3%
Storage	6 month at 23°C ±2°C and 50% RH	±5%


Out of range values may not comply with these results. Standard test conditions: temperature:  $23^{\circ}$ C  $\pm 2^{\circ}$ C and 45% to 70% RH. Mechanical life of detented versions is 100 cycles

## **RECOMMENDED CONNECTIONS**

Recommended connection circuit for a position sensor or control application (voltage divider circuit electronic design).



## **RECOMMENDED REFLOW PROFILE**

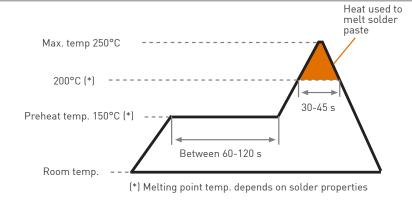


The recommended reflow profile is provided as a guideline. Optimal profile may differ due to oven type, assembly layout or other design or process variables. Customers should verify actual device performance in their specific application and reflow process. Please contact Piher if you require additional support.


## 6-mm carbon SMD potentiometer

### **HOW TO ORDER**

#### Vertical Adjustment - Horizontal mount: PS6KV50-102A3030

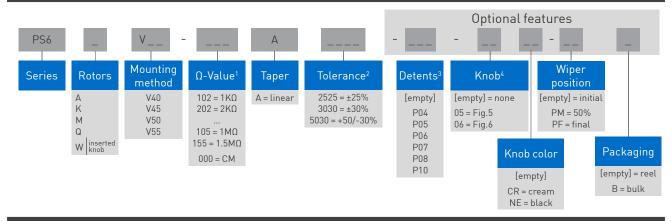

### Horizontal adjustment - Vertical mount: PS6H40-120A3030

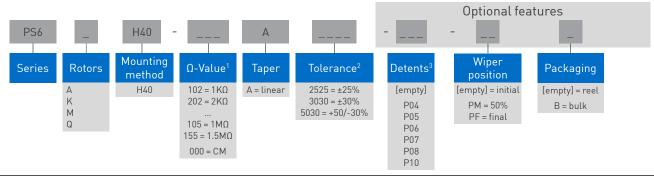

1.  $\Omega$ - Value:  $\underline{XXX}$  - First two digits of  $\Omega$ -value XXX - Number of zeros

000 = CM = switch SPDT version:



- 2. Tolerance: for custom tolerance please check availability
- 3. Detents: Available for K and M rotor type. Rotor color: brown. Others available on request.
- 4. Knob not made of self-extinguishable plastic. Shaft available to order separately.

## **STANDARD CONFIGURATION**

	PS-6
Life	1.000 cycles / detented versions: 100 cycles
Detents	none
Non-flammable material	yes
Housing color	grey
Wiper Position	initial
Packaging	reel

#### **ORDER CODE EXAMPLES**


#### PS6KV50-103A3030


PS6 model with K rotor; V50 mounting type; 10K ohm resistive value; linear taper and 30% resistive tolerance

### PS6WV40-502A2525-06NE-PF

PS6 model with inserted knob fig. 6; 5K ohm resistive value; linear taper; 25% resistive tolerance; color of the knob: black; wiper positioned at the end of the travel

## 6-mm carbon SMD potentiometer

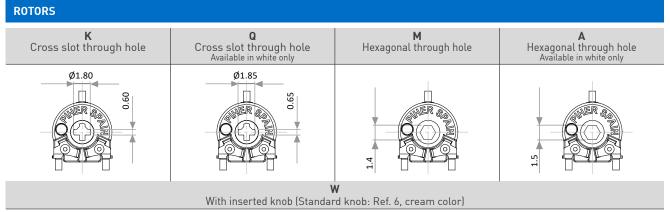

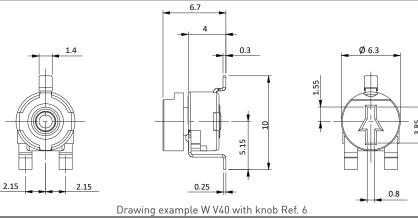



Default delivery is at initial position. Wipers are shown positioned at 50% for the picture.


## **MOUNTING METHOD - DIMENSIONS**


## Horizontal Adjustment / Vertical Mounting

H40











Recommended PCB hole layout

## Vertical Adjustment / Horizontal Mounting


V40



PIHER sensing systems







Recommended PCB hole layout







## 6-mm carbon SMD potentiometer

## **MOUNTING METHOD - DIMENSIONS**


## Vertical Adjustment / Horizontal Mounting

V/<sub>1</sub>5












Recommended PCB hole layout

V50












Recommended PCB hole layout

V55











Recommended PCB hole layout

## STANDARD RESISTANCE-VALUES AND TOLERANCES

Resistance $\Omega$	1K	2K	2.2K	2.5K	4.7K	5K	10K	20K	22K	25K	47K	50K	100K	200K	220K	250K	470K	500K	1M	1.5M
Order Code	102	202	222	252	472	502	103	203	223	253	473	503	104	204	224	254	474	504	105	155
Tolerance	+ 30%											<u> </u>	/_30%							

## **SWITCH VERSION**






## 6-mm carbon SMD potentiometer

## **DETENTS / STOP POSITIONS** P04 P06 -Relative detent positions along total mechanical travel


Unless otherwise specified the detents are evenly spaced (using the end points as reference). Rotor color of detented versions is brown. Standard mechanical life for PS-6 with detents: 100 cycles. Long life versions are available on request.

# **KNOBS / SHAFTS** Fig. 5 - Ref.: 6148 For W rotors only. Fig. 6 - Ref.: 6160 For W rotors only. Position of the wiper.

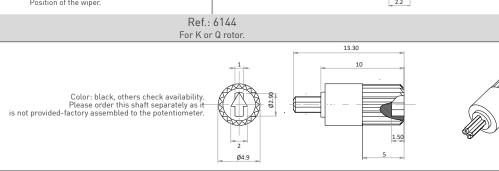


If you wish to use your own plastic shaft/knob/actuator please contact Piher Sensing Systems for advice about compatible materials.

## **WIPER POSITION**



Wiper positioning on initial position is standard. Special delivery positions available on request.


## 6-mm carbon SMD potentiometer

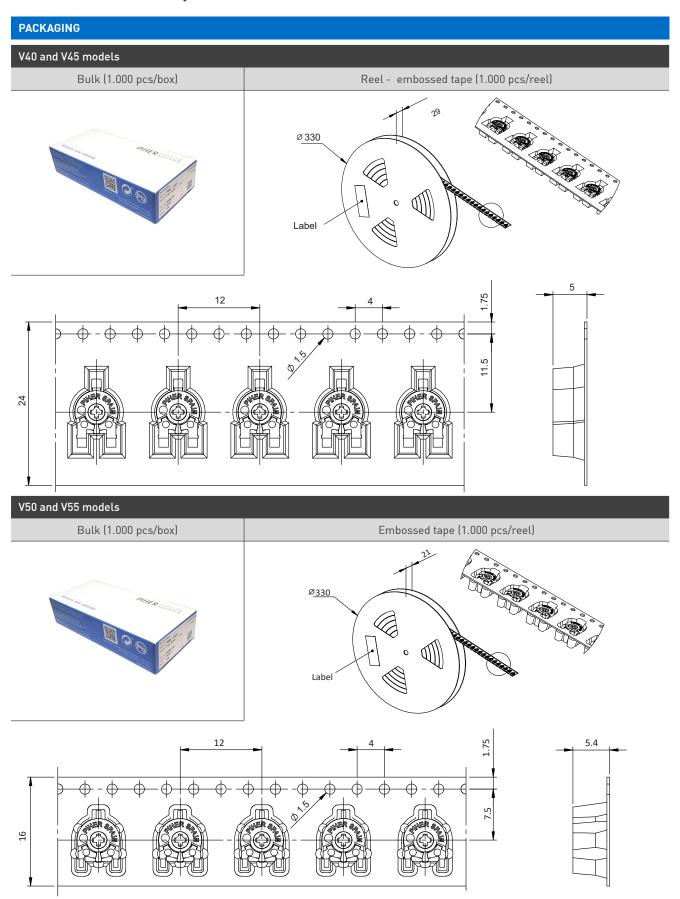

Models with factory-assembled knob will use a reel of 380mm diameter.

## 6-mm carbon SMD potentiometer

### **PACKAGING**

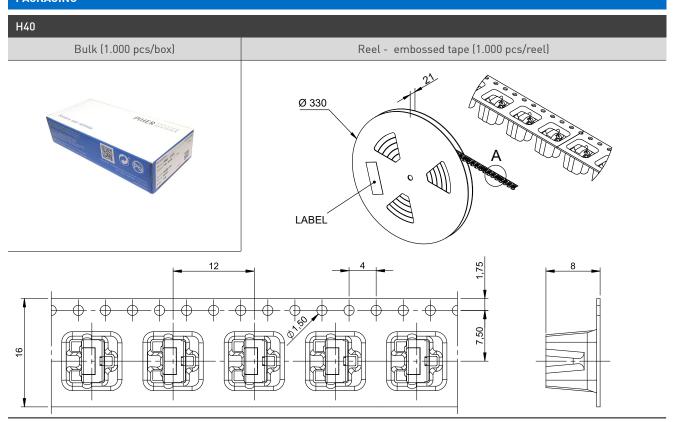

### **OUR ADVANTAGE**

- ▶ Leading-edge innovative position sensing solutions
  - Contactless (Hall-effect and Inductive Technology)
  - Contacting (Potentiometers, Printed Electronics)
- ► Engineering design-in support
- ▶ All our products can be customized to fit target application and customer requirement
- ▶ Capability to move seamlessly from development to true high-volume production
- ▶ A global footprint with global engineering and commercial support
- ▶ One-stop shop not limited to position sensors (temperature, pressure, gas,...) through group collaboration
- ▶ Flexibility and entrepreneurship of a medium-sized company with the backing of Amphenol Corporation









Please always use the latest updated datasheets and 3D models published on our website.

Disclaimer:
The product information in this catalog is for reference purposes. Please consult for the most up to date and accurate design information.
Piher Sensors & Controls S.A., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Piher"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product described herein.
Piher disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Piher's terms and conditions of sale, including but not limited to the warranty expressed therein, which apply to these products.

by to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piher

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piher.
The products shown herein are not designed for use in medical, life-asving, or life-sustaining applications unless otherwise expressly indicated for use in such applications to unless or life-sustaining applications unless otherwise expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Piher for any damages arising or resulting from such use or sale. Please contact authorized Phier personnel to obtain written terms and conditions reparding for such applications.
Product names and markings noted herein may be trademarks of their respective owners. Information contained in and/or attached to this catalogue may be subject to export control regulations of the European Community. USA, or other countries. Each recipient of this document is responsible to ensure that usage and/or transfer of any information contained in this document complies with all relevant export control regulations. If you are in any doubt about the export control restrictions that apply to this information, please contact the sender immediately. For any Piher Exports, Note: All products? Intendioples are EAR99 Classified commodities. Exports from the United States are in accordance with the Export Administration Regulations. Diversion contrary to US law is prohibited.

## CONTACT

**Piher Sensing Systems** 

Polígono Industrial Municipal Vial T2, Nº22 31500 Tudela Spain

#### sales@piher.net

+34 948 820 450 Europe: Americas: +1 636 251 0855 Asia Pacific: +65 9641 8886 +91 9538 686 586 India: