#### Overview

Nextion is a Human Machine Interface (HMI) solution combining an onboard processor and memory touch display with Nextion Editor software for HMI GUI project development. Using the NEXTION Editor software, you can quickly develop the HMI GUI by drag-anddrop components (graphics, text, button, slider etc.) and ASCII textbased instructions for coding how components interact at the display side. Nextion HMI display connects to peripheral MCU via TTL Serial (5V, TX, RX ,GND) to provide event notifications that peripheral MCU can act on, the peripheral MCU can easily update progress and status back to Nextion display utilizing simple ASCII text-based instructions.

The Intelligent Series products have more powerful hardware in terms of MCU, Flash storage and SRAM compared with Basic Series and Enhanced Series. What's more and new? The audio, video and animation play functions enrich user's project HMI interaction. The Intelligent Series supports advanced software features and functions such as transparent components, page loading effect, component Move and Drag .etc.

Package include: Nextion NX4827P043-011R-Y HMI Display\*1, XH2.54 4P wire\*1, power supply test board\*1.

Note: the small power supply test board and connecting wire inside the package allow you to test if the electrical supply is enough or not. See the image below on how to use it.

## Caution:


Working under insufficient power supply condition will damage the Nextion model easily.



Blurred screen? Flashing? You may be suffering from power shortages. Power off at the first possible moment. No more repeated attempts to damage your Nextion model.

A small connector is included in the package. Please try to power Nextion with your phone charger through the connector to check if Nextion works well.

A high quality usb cable is required.

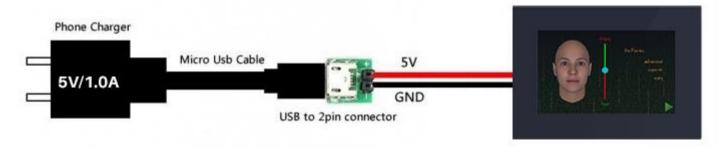

#### **Nextion Models**

Nextion Type	Intelligent Series
Nextion Models	NX4827P043-011R-Y (4.3 inch resistive touchscreen with enclosure)

#### **Specifications**

	Data	Description
Color	65K 65536 colors	16 bit 565 <i>,</i> 5R-6G-5B
Layout size	139.5mm(L)×97.5mm(W)×21mm(H)	NX4827P043- 011R-Y
Active	105.50mm(L)×67.20mm(W)	

Area (A.A.)		
Visual Area (V.A.)	95.04mm(L)×53.86mm(W)	
Resolution	480×272 pixel	Also can be set as 272×480
Touch type	Resistive	
Touches	> 1 million	
Backlight	LED	
Backlight lifetime (Average)	>30,000 Hours	
Brightness	300nit	0% to 100%, the interval of adjustment is 1%
Weight	156.3g	

### **Electronic Characteristics**

	Test Conditions	Min	Typical	Max	Unit
Operating Voltage		4.65	5	6.5	V
Operating Current	VCC=+5V, Brightness is 100%	_	220	_	mA
	SLEEP Mode	_	170	_	mA
Power supply recommend : 5V, 1.0A, DC					

# Working Environment & Reliability Parameter

	Test Conditions	Min	Typical	Max	Unit
Working Temperature	5V, Humidity 60%	-20	25	70	°C
Storage Temperature		-30	25	85	°C
Working Humidity	25°C	10%	60%	90%	RH

## **Interfaces Performance**

	Test Conditions	Min	Typical	Max	Unit		
Serial Port Baudrate	Standard	2400	9600	921600	bps		
Output High Voltage (TXD)	IOH=1mA	3.0	5.0	Vin	V		
Output Low Voltage(TXD)	IOL=-1mA		0.1	0.2	V		
Input High Voltage(RXD)		3.0	5.0	Vin	V		
Input Low Voltage(RXD)		-0.7	0.0	1.3	V		
Serial Port Mode	3.3V/5.0V TTL	3.3V/5.0V TTL					
Serial Port	4Pin_2.54mm	4Pin_2.54mm					
USB interface	NO						
SD card socket	Yes (FAT32 format), support maximum 32G Micro SD Card * presence of *.tft file on microSD: socket is exclusive to upgrade Nextion firmware/HMI design * Intelligent Series only: see Instruction Set /						

	Editor Guide for microSD card runtime usage
Extended IO	8 Digital extended GPIO
	<ul> <li>IO0-IO7 support input, output and component binding event</li> <li>* IO pin / ports are not exclusive, limit current draw to 1mA recommended</li> </ul>
	IO6-IO7 support PWM
RTC	built-in RTC support (Battery type: CR1220)

Vin: the input voltage of power supply

## Memory Features

Memory Type	Test Conditions	Min	Typical	Max	Unit
FLASH Memory	Store fonts and images			120	MB
User Storage	EEPROM			1024	BYTE
RAM Memory	Store variables			512	KB
Instruction Buffer	Instruction Buffer			4096	BYTE

### Audio Features

Speaker	Parameter	Min	Typical	Max	Unit
Power	16Ω 0.5W		0.5		W
Size	Ф40*5.2Н				mm

