

四川启兴电子有限公司

电话: 028-82632682, 18030517459

QQ: 2228156427, Email: ai mee_qi xi ng01@126. com

四川省成都市温江区蓉台大道北段 388 号

SICHUAN QIXING ELECTRONICS Co., Ltd.

Tel: +86-028-82632682, Mobile: +86 18030517459

No.388 north,Rongtai Ave,wenjinag district,Chengdu city,sichuan
provine China

承认书

SPECIFICATIONS FOR APPROVAL

客户/Customer:

送呈/Attn:

客户确认回复/Evaluation Results

签核/Signature:

合格/Approved

拒收/Rejection

请确认并回签一份。


Please sign to confirm your acceptance and return a copy for our record filing.

品名/Commodity: 可调电阻

型号/Model No.: RM-065/WH06-2

备注/Remarks:

日期/Date:

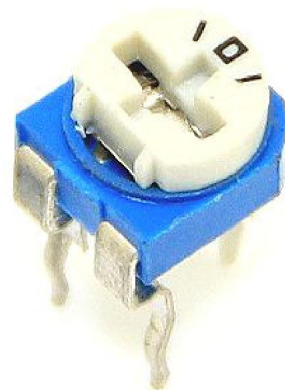

类型/Type: RM-065

① 电气性能 Electric characteristics

1.1 总阻值 Nominal Resistance	100Ω ~ 1MΩ	> 1MΩ or ≤ 2MΩ
1.2 阻值误差 Resistance Tolerance	□ ±10% ■ ±20%	■ ±30%
1.3 残留阻值 Residual Resistance	小于标示阻值的 5%，最大不超过 30Ω Max. 5% of Nominal Resistance but under 30Ω	
1.4 线性 Resistance Taper	直线 B / Linear B	
1.5 功率 Rated Power	0.1W	
1.6 使用电压 Operating Voltage	不超过 50V / 50V Max.	
1.7 旋转寿命 Rotational Life	空载旋转 100 圈后，阻值变化最大为±15% Max. ±15% changed in resistance after 100 times unloaded rotations	
1.8 负载寿命 Load Life	加额定功率 3 小时，阻值变化最大为±15% Max. ±15% changed in resistance after 3 hours loaded	

② 机械性能 Mechanical characteristics

2.1 旋转角 Rotational Angle	200±20°
2.2 扭力矩 Rotational Torque	60 ~ 300g.cm
2.3 止挡强度 Stop-end Strength	大于 500g.cm 500g.cm Minimum
2.4 机械强度 Mechanical Strength	电阻体受最小 1Kg 压力不会破裂 Bakelite base not to be broken down under a force of 1Kg.

③ 气候特性 Climatic characteristics

3.1 使用温度 Operating Temp.	-10°C ~ 70°C
3.2 温度特性 Temp. characteristics	以 70°C 焯 5 小时，阻值变化在-30% ~ +5%以内 Resistance changed within -30% ~ +5% after 5 hours at 70°C
3.3 湿度特性 Commodity characteristics	加额定功率，在 40°C 温度及相对湿度 90%的情况下工作 350 个小时，阻值变化小于 20% Max. resistance changed within 20% after 350 hours loaded at 40°C and R.H. 90%

④ 焊锡条件 Soldering conditions

4.1 焊锡温度 Soldering Temperature	250°C
4.2 焊锡时间 Soldering Time	2 秒 / 2 seconds


⑤ 脚位 Pins(mm)

类型/Type	SR085	SR083	SR082	SR065	SC065	RM065	RM063	NR065	NR063	...X
脚位/Pin	5*10	5*2.5	5	5*7	5*5	5*5	5*2.5	5*5	5*2.5	同 same

制作者 Prepared by	审查员 Checked by

⑥产品图片及尺寸工程图 / Pictures and Dimensions (mm)

类型/Type: RM-065/WH06-2

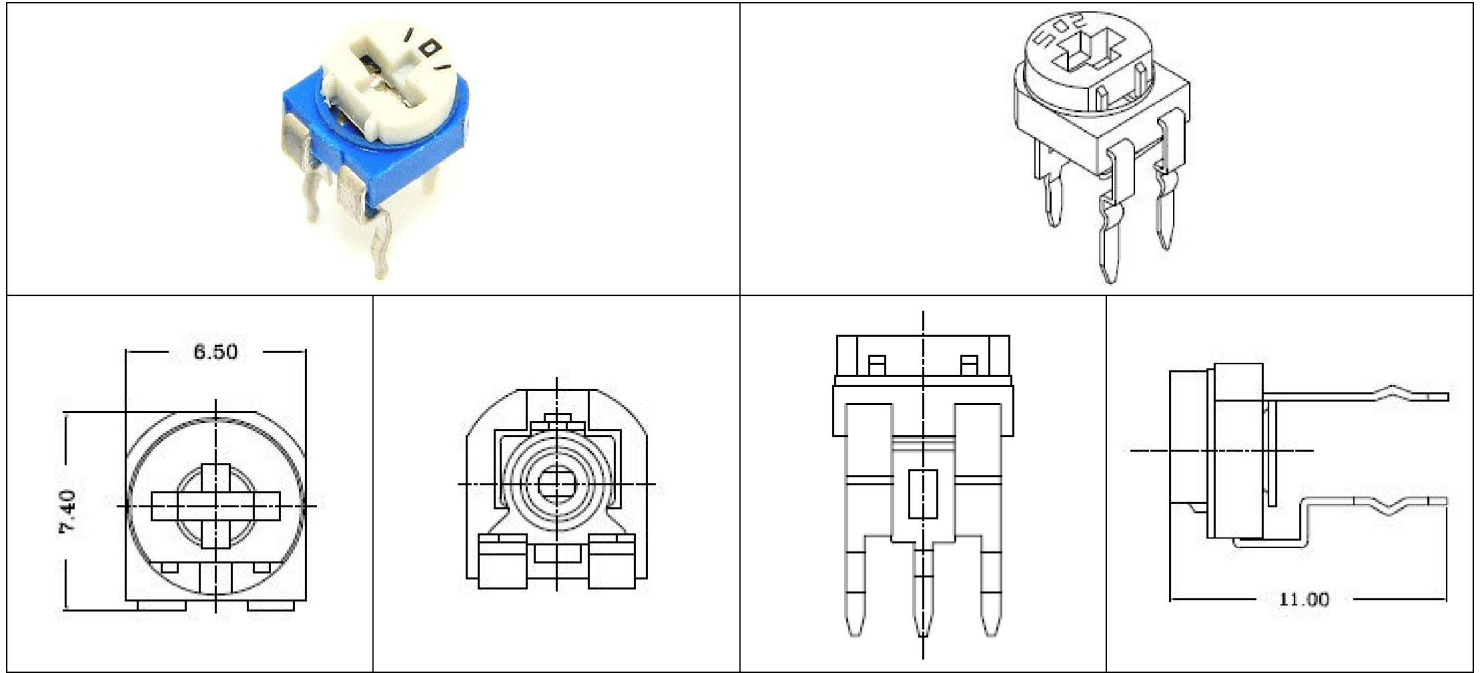

制作者 Prepared by	审查员 Checked by