

Progressing towards a new dimension:




3
Year
Warranty

the GT707 from Panasonic.

Slim design with large display area

- Fits into the panel cut-out of a 5.7 inch touch panel, even though it has diagonal display size of 7 inches!
- IP65 protection
- Transfer of program data via SD/SDHC memory card (not for FP7)

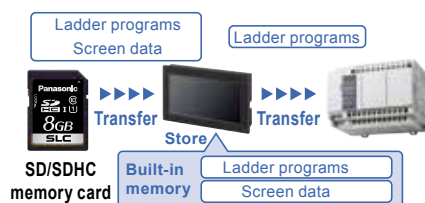

- Comprehensive range of accessories (panel face protection sheets, waterproof packing, backup batteries, connection cables)


- Software GTWIN version 3.1 for free until March 2016
- High-resolution TFT color screen with 65536 colors and a long-life white LED backlight
- User-friendly screen display with a large display area (800 x 480 pixels)
- PLC connection cable with 9-pin Sub-D female in different lengths
- Check the status of connected devices without a PC (not for FP7)



Model comparison:

GT707 (7 inch diagonal display size)
compared with GT32T-R (5.7 diagonal
display size)

- 16 times more colors!
- 5 times higher resolution!

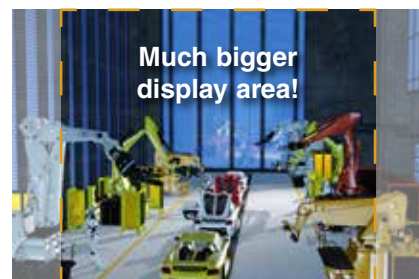

Programming Software
GTWIN Ver.3.1
FREE Download!
Oct 2015 - Mar 2016

Download <https://www.panasonic-electric-works.com/eu/screen-creation-software-tool-gtwin.htm>

Item	Description
Color of front panel	Black
Communication port	RS232C
Power supply	24V DC
Operating voltage range	21.6 to 26.4V DC
Current consumption	Max. 6W (max. 250mA)
Ambient temperature	0 to +50°C
Ambient humidity	20 to 85% RH (no condensation)
Degree of protection	IP65 dust-proof and drip-proof from the front of the panel only with waterproof packing (accessory)
Net weight	Approx. 360g
Display	7 inch TFT color LCD
Display size	154.3 x 86.7mm (W x H)
Display area	153.8 x 85.6mm (W x H)
Resolution	800 x 480 pixels (W x H)
Display colors	65536 colors
Backlight	White LED
Number of screens	Approx. 230 (depending on screen contents)
SD memory card slot	Available
USB port	USB (Mini-B type)
Dimensions	186 x 122 x 34mm (W x H x D)

Accessories	Description
9-pin Sub-D female — 5-pin mini DIN plug, angled type	PLC connection cable for FP0R/2/-e/-Sigma/-X TOOL port AFC8513D (3m)
9-pin Sub-D female — 3 singles wires	PLC connection cable for FP0R/FP-X/FPG COM port and FP7 TOOL port AFB85D018-2M (2m) AFB85D018 (0.5m)
	Panel face protection sheets for touch panels (10 sheets in a set) AIG7A07S01
	Backup battery AFPABAT001
	Programming cable, USB type A to Mini USB (5 pins) CABMINIUSB5

Panasonic Electric Works Europe AG

Robert-Koch-Straße 100 • 85521 Ottobrunn
Tel.: +49 (0) 8024 648-0 • Fax: +49 (0) 8024 648-111

email: info.peweu@eu.panasonic.com • www.panasonic-electric-works.com

Panasonic®