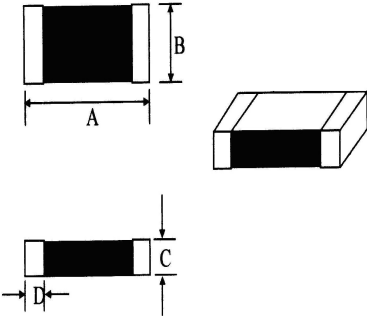


SPECIFICATION FOR APPROVAL

CUSTOMER:				DATE:			
PART NO: CB2012-222Y-N				DWG.NO: TE2066999			
CUSTOMER PART NO:				CUST.DWG.NO:			
(1) DIMENSIONS (UNIT: mm) 				A	2.0 ± 0.2	m/m	
				B	1.2 ± 0.2	m/m	
				C	0.9 ± 0.2	m/m	
				D	0.5 ± 0.3	m/m	
				E		m/m	
				F		m/m	
				G		m/m	
				H		m/m	
				I		m/m	
				J		m/m	
(2)ELECTRICAL REQUIREMENTS							
Z (Ω)	2200 ± 25%	TEST FREQ	100MHz / 100mV				
RDC (Ω)	0.6 (MAX)	TEST FREQ					
IDC (mA)	200 (MAX)	TEST FREQ					
TEST INSTRUMENTS HP4338A MILLIOHMMETER HP 4291B RF IMPEDANCE / MATERIAL ANALYZER				APPROVED BY 吳載敏			
				CHECKED BY 張明德			
				DRAWN BY 黃慧診			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO: CB2012-222Y-N				DWG.NO: TE2066999					
CUSTOMER PART NO :				CUST.DWG.NO :					
ITEM	Z (Ω)	RDC (Ω)	IDC (mA)	DIMENSION (UNIT : mm)					
FREQ	100MHz / 100mV			A	B	C	D		
SPEC	2200 $\pm 25\%$	0.6 (MAX)	200 (MAX)	2.0 ± 0.2	1.2 ± 0.2	0.9 ± 0.2	0.5 ± 0.3		
1	2175.7	0.320	OK	2.01	1.25	0.90	0.52		
2	1968.4	0.332	OK	2.04	1.22	0.88	0.50		
3	2051.1	0.321	OK	2.02	1.23	0.89	0.51		
4	2059.3	0.343	OK	2.00	1.24	0.90	0.50		
5	2036.9	0.334	OK	2.02	1.22	0.92	0.53		
6	2078.8	0.312	OK	2.03	1.23	0.88	0.55		
7	2012.1	0.328	OK	2.01	1.25	0.89	0.51		
8	1930.7	0.331	OK	2.00	1.24	0.88	0.52		
9	2030.9	0.312	OK	2.02	1.22	0.89	0.51		
10	2116.1	0.320	OK	2.03	1.23	0.90	0.54		
X	2046.0	0.325		2.02	1.23	0.89	0.52		
R	245.0	0.031		0.04	0.03	0.04	0.05		
						APPROVED BY 吳載敏			
						CHECKED BY 張明德			
						DRAWN BY 黃慧診			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw

CB2012-222Y-N

