



WE CATCH THE  
BEST TECH. FOREVER

# EVERBOUQUET INTERNATIONAL CO., LTD.

Address: 13F-3, No. 8, Lane 280, Sec. 6, Minchuan  
E. Rd., Nei-Hu 114, Taipei, Taiwan, R.O.C.  
TEL: 886-2-2633-1253 FAX: 886-2-2631-2881

PART NO. : MC1602C-SYL

FOR MESSRS. : \_\_\_\_\_

## CONTENTS

<i>NO.</i>	<i>ITEM</i>	<i>PAGE</i>
1.	COVER	1
2.	RECORD OF REVERSION	2
3.	GENERAL SPECIFICATION	3
4.	MECHANICAL DATA	3
5.	ABSOLUTE MAXIMUM RATINGS	4
6.	ELECTRICAL CHARACTERISTICS	5
7.	OPTICAL CHARACTERISTICS	5
8.	OUTLINE DIMENSION	6
9.	BLOCK DIAGRAM	7
10.	POWER SUPPLY FOR LCM	7

ACCEPTED BY: \_\_\_\_\_

PROPOSED BY : \_\_\_\_\_



## RECORD OF REVISION

DATE	PAGE	SUMMARY

### **3. General specifications**

#### **3.1 General specifications**

PLEASE REFER TO:

“CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS (MS-10-12780)”.

#### **3.2 This individual specification is prior to general specifications**

### **4. Mechanical data**

- (1) NUMBER OF DOT----- 16 CH \* 2 LINE
- (2) MODULE SIZE----- 80.0 W \* 36.0 H \* 15.0 mm
- (3) EFFECTIVE AREA----- 64.5 W \* 16.0 H mm
- (4) CHARACTER PATTERN ----- 5 \* 7 DOTS + CURSOR
- (5) CHARACTER SIZE----- 2.96 W \* 4.86 H mm
- (6) CHARACTER PITCH----- 3.55 mm
- (7) DOT SIZE ----- 0.56 W \* 0.66 H mm
- (8) DOT PITCH----- 0.60 W \* 0.70 H mm
- (9) VIEWING DIRECTION----- 6 O' CLOCK
- (10) LCD TYPE----- STN.YELLOW-GREEN.TRANSFLECTIVE.
- (11) LED COLOR----- YELLOW-GREEN

## 5. Absolute maximum ratings

### 5.1 Electrical absolute maximum ratings

<i>I T E M</i>	<i>SYMBOL</i>	<i>MIN.</i>	<i>MAX.</i>	<i>UNIT</i>	<i>COMMENT</i>
POWER SUPPLY FOR LOGIC	VDD-VSS	0	6.0	V	-----
INPUT VOLTAGE	VI	VSS	VDD	V	-----
STATIC ELECTRICITY	-----	-----	100	V	NOTE (1)

NOTE (1): ELECTRO-STATIC DISCHARGE RESISTANCE IS TESTED BY CHARGING A 200PF CAPACITOR AND DISCHARGING IT BY CONTACT WITH A INTERFACE CONNECTOR PIN.

### 5.2 Environmental absolute maximum ratings

<i>I T E M</i>	<i>OPERATING</i>		<i>STORAGE</i>		<i>COMMENT</i>
	<i>MIN.</i>	<i>MAX.</i>	<i>MIN.</i>	<i>MAX.</i>	
AMBIENT TEMPERATURE	0	50	-20	70	-----
HUMIDITY	NOTE (2)		NOTE (2)		NO CONDENSATION
VIBRATION NOTE (3)	-----	0.5G	-----	2G	10 300HZ XYZ DIRECTIONS 1 Hr EACH
SHOCK NOTE (3)	-----	3G	-----	50G	10 msec XYZ DIRECTIONS 1 TIME EACH
CORROSIVE GAS	NOT ACCEPTABLE		NOT ACCEPTABLE		-----

NOTE (2): Ta 50 : 90%RH MAX.

Ta > 50 : ABSOLUTE HUMIDITY MUST BE LOWER THAN THE  
HUMIDITY OF 90% RH AT 50 . (80%RH AT 60 )

NOTE (3): 1G = 9.8 m/S<sup>2</sup>

## 6. Electrical characteristics

$T_a = 25$      $V_{DD} = 5.0 \pm 0.25$  V

<i>I T E M</i>	<i>SYMBOL</i>	<i>CONDITION</i>	<i>MIN.</i>	<i>TYP.</i>	<i>MAX.</i>	<i>UNIT</i>
INPUT VOLTAGE	V <sub>IH</sub>	-----	2.0	-----	V <sub>DD</sub>	V
	V <sub>IL</sub>		V <sub>SS</sub>	-----	0.8	V
OUTPUT VOLTAGE (H LEVEL)	V <sub>OH</sub>	I <sub>OH</sub> = -0.2mA	2.4	-----	-----	V
	V <sub>OL</sub>	I <sub>OL</sub> = 1.6 mA	-----	-----	0.4	V
POWER SUPPLY CURRENT	I <sub>DD</sub>	V <sub>DD</sub> = 5.0V	-----	1.0	1.5	mA
RECOMMENDED LCD DRIVING VOLTAGE	V <sub>DD-VO</sub> DUTY= 1/16	T <sub>a</sub> = 0	-----	4.9	-----	V
		T <sub>a</sub> = 25	-----	4.5	-----	V
		T <sub>a</sub> = 50	-----	4.1	-----	V
POWER SUPPLY CURRENT FOR LED	I <sub>LED</sub>	V <sub>DD</sub> =5.0V	-----	120	150	mA

NOTE (1): RECOMMENDED LCD DRIVING VOLTAGE MAY FLUCTUATE ABOUT  
± 0.5V BY EACH MODULE.

## 7. Optical characteristics

$T_a = 25$



$V_{DD} = 5.0$ V

<i>I T E M</i>	<i>SYMBOL</i>	<i>CONDITION</i>	<i>MIN.</i>	<i>TYP.</i>	<i>MAX.</i>	<i>UNIT.</i>	<i>NOTE</i>
VIEWING ANGLE	2- 1	K = 2.0	30	40	-----	deg.	2
CONTRAST RATIO	K	= 10° = 0°	3.0	4.0	-----	-----	2
RESPONSE TIME	t <sub>r</sub> (rise)	= 10° = 0°	-----	250	350	ms	2
	t <sub>f</sub> (fall)	= 10° = 0°	-----	300	400	ms	2
BRIGHTNESS FOR LED BACKLIGHT	B	= 0° = 0°	5.0	-----	-----	cd/m <sup>2</sup>	2,3

NOTE (2): SEE CUSTOMER ACCEPTANCE STANDARD SPECIFICATION FOR  
DEFINITION OF OPTICAL CHARACTERISTICS.

NOTE (3): UNDER NORMAL TEMPERATURE AND HUMIDITY IN A DARK ROOM.


## 8. Outline dimension

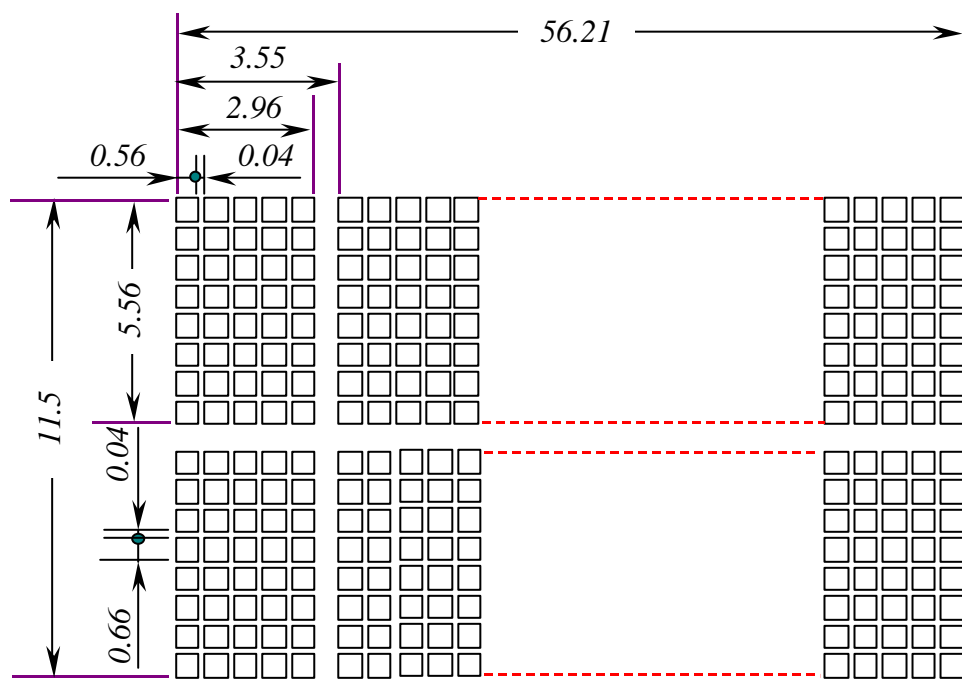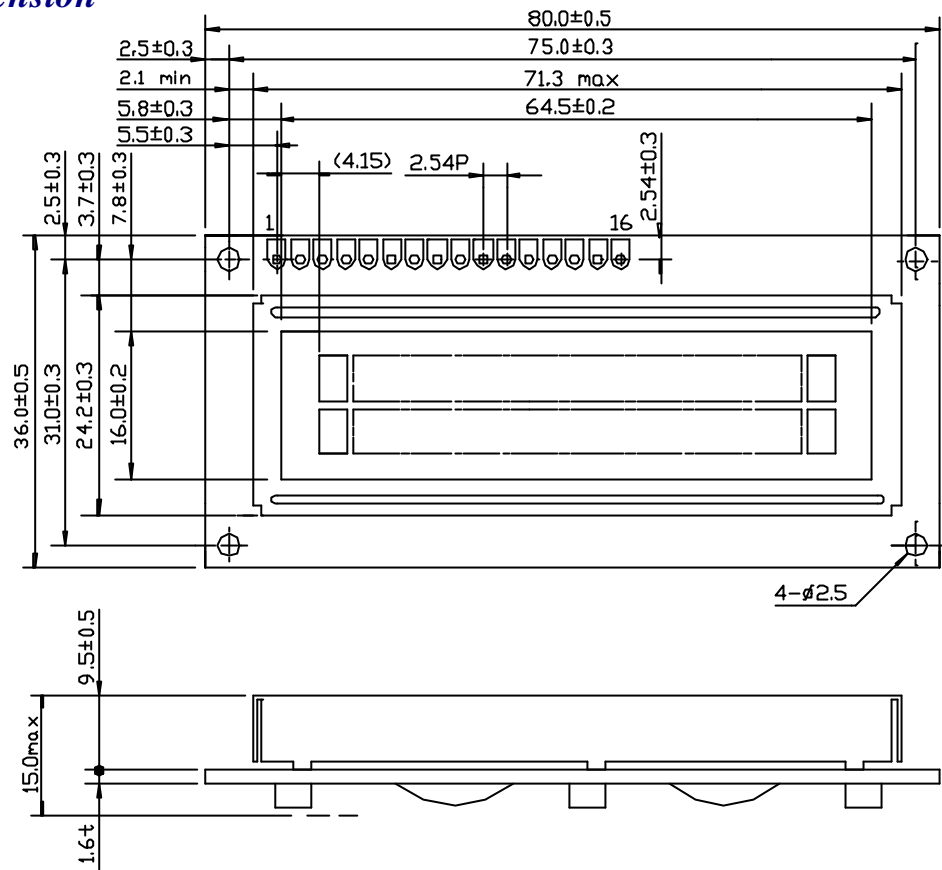

### Interface pin connection

<b>PIN NO.</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
SYMBOL	VSS	VDD	Vo	RS	R/W	E	DB0	DB1
<b>PIN NO.</b>	<b>9</b>	<b>10</b>	<b>11</b>	<b>12</b>	<b>13</b>	<b>14</b>	<b>15</b>	<b>16</b>
SYMBOL	DB2	DB3	DB4	DB5	DB6	DB7	NC	NC


## 9. Block diagram

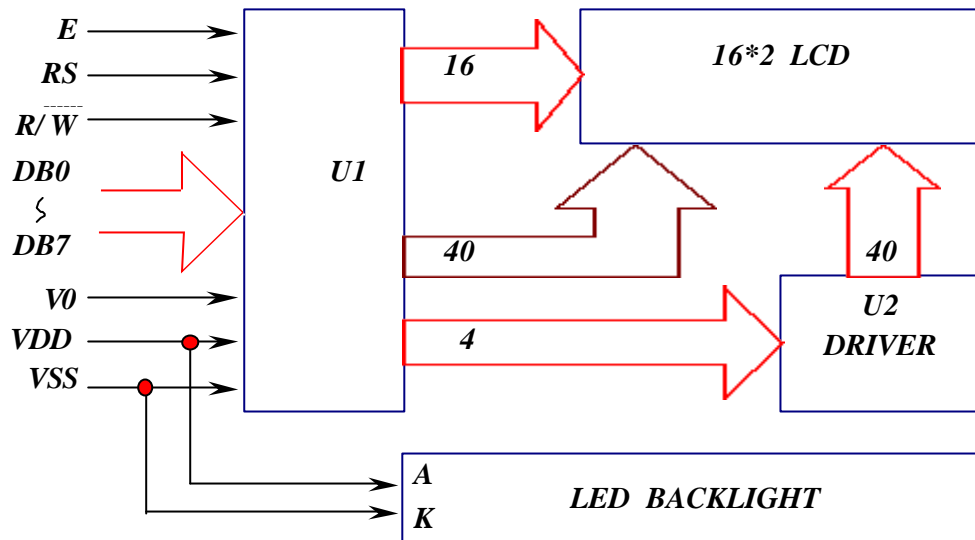

### Display data address charts

Character	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
LINE 1	80	81	82	83	84	85	86	87	88	89	8A	8B	8C	8D	8E	8F
LINE 2	C0	C1	C2	C3	C4	C5	C6	C7	C8	C9	CA	CB	CC	CD	CE	CF

## 10. Power supply for LCM

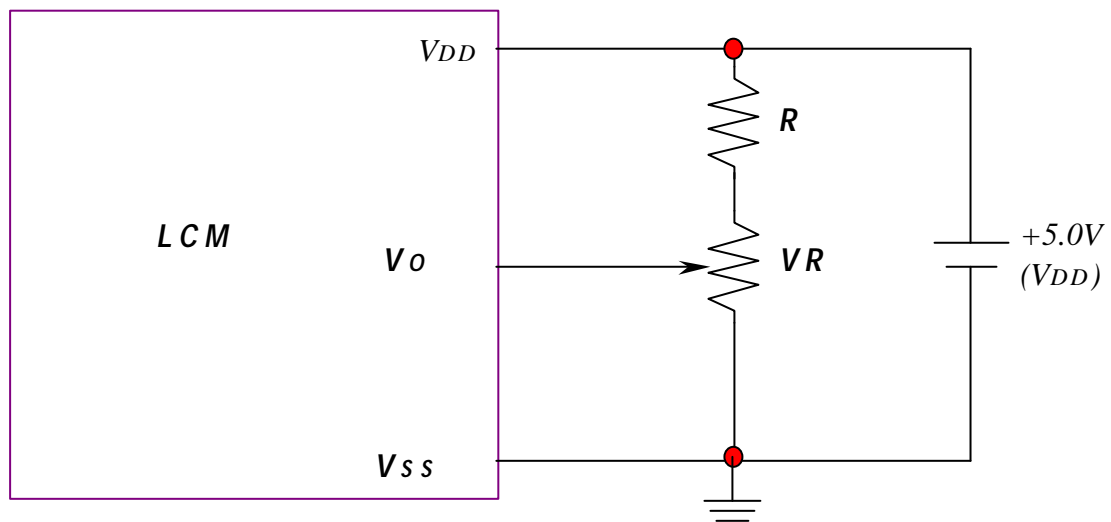

RECOMMENDED RESISTOR R :  $V_{DD} - V_0 \quad 1.5V$

$V_{DD} - V_0$ : LCD DRIVING VOLTAGE

VR: 10KΩ~ 20KΩ