



PRODUCT DATA APPROVAL SHEET


Core- EE1304

Cosmo Ferrites Ltd. - INDIA

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per set)

- Effective Length (L_e): 29.6mm
 - Effective Area (A_e): 13.0mm²
 - Effective Area (A_{Min}): 12.4mm²
 - Effective Volume (V_e): 385mm³
- Approximate weight (without Gap): 1.8g/Set**




EE1304 Un-gapped (OL)

Test Conditions: 1kHz/1mT/CFR COIL,N=100/25°C

Material Grade	Initial Permeability (μ_{ac})	AL Value (nH)/Set	P_v (W/set)	Ordering code
CF139	2100 \pm 20%	850 +30%/-20%	$\leq 0.04(100mT, 100kHz, 100^\circ C)$	CF139EE1304 OL

Dimensions:

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	12.65	13.1	12.2
B	9.2	9.5	8.9
C	6.5	6.5	6.3
D	4.5	4.8	4.5
E	3.7	3.7	3.4
F	3.7	3.7	3.4

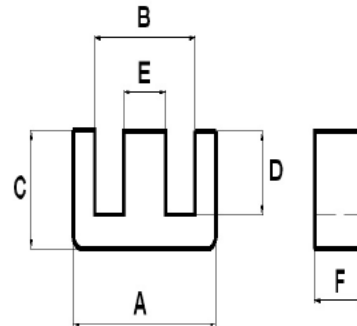

For Cosmo Ferrites Limited-INDIA

Checked By: A.K.
 Approved By: B.S.
 Authorized By: KSR
 Date: 05-11-2014(ISSUE N0.1)

Customer's Approval
 Authorized Signatory:
 Name:
 Date:

NOTE: Please send this Data Sheet back to Cosmo Ferrites Ltd. after approval. If not received back within 15 days, it will be presumed that all the specifications given in the consent/data sheet are acceptable to the concerned.