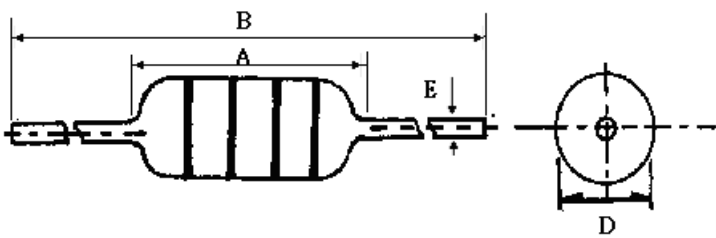



SPECIFICATION FOR APPROVAL

CUSTOMER :				DATE :			
PART NO : AL0510-222K				DWG.NO : IT2217362			
CUSTOMER PART NO :				CUST.DWG.NO :			
(1) DIMENSION (UNIT: mm) 				A	14.0 (MAX)	m/m	
				B	62.0 ± 6.00	m/m	
				D	5.0 (MAX)	m/m	
				E	0.6 ± 0.05	m/m	
				F		m/m	
				G		m/m	
				H		m/m	
				I		m/m	
				J		m/m	
				K		m/m	
				(2) ELECTRICAL REQUIREMENTS			
L (mH)	2.2 ± 10%	TEST FREQ	1KHz/0.25V				
Q	60 (MIN)	TEST FREQ	0.252MHZ				
RDC (Ω)	14 (MAX)	TEST FREQ					
IDC (mA)	280 (MAX)	TEST FREQ					
TEST INSTRUMENTS							
LCR METER CHEN HWA 100							
CORE	DRWW 4×6	APPROVED BY		吳載敏			
WIRE	2UEW φ 0.08mm	CHECKED BY		張明德			
WINDING	330 Ts	DRAWN BY		APPLE			

CORE MASTER ENTERPRISE CO., LTD.

TEL: 886-2-8919-1288 FAX: 886-2-8919-1298 WEB: www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO : AL0510-222K				DWG.NO : IT2217362					
CUSTOMER PART NO :				CUST.DWG.NO :					
ITEM	L (mH)	RDC (Ω)	IDC (mA)						
FREQ	1KHZ 0.25V								
SPEC	2.2 ± 10%	14 (MAX)	280 (MAX)						
1	2.210	11.556	OK						
2	2.204	12.007	OK						
3	2.206	11.819	OK						
4	2.175	12.007	OK						
5	2.209	11.894	OK						
6	2.167	11.998	OK						
7	2.209	11.726	OK						
8	2.193	11.629	OK						
9	2.235	11.481	OK						
10	2.150	11.829	OK						
\bar{X}	2.196	11.795							
R	0.085	0.526							
							APPROVED BY		
							吳載敏		
							CHECKED BY		
							張明德		
							DRAWN BY		
							APPLE		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw