


AH1-JS-DR-01-051

MARK	ECN	DESCRIPTION	DWN.	DATE

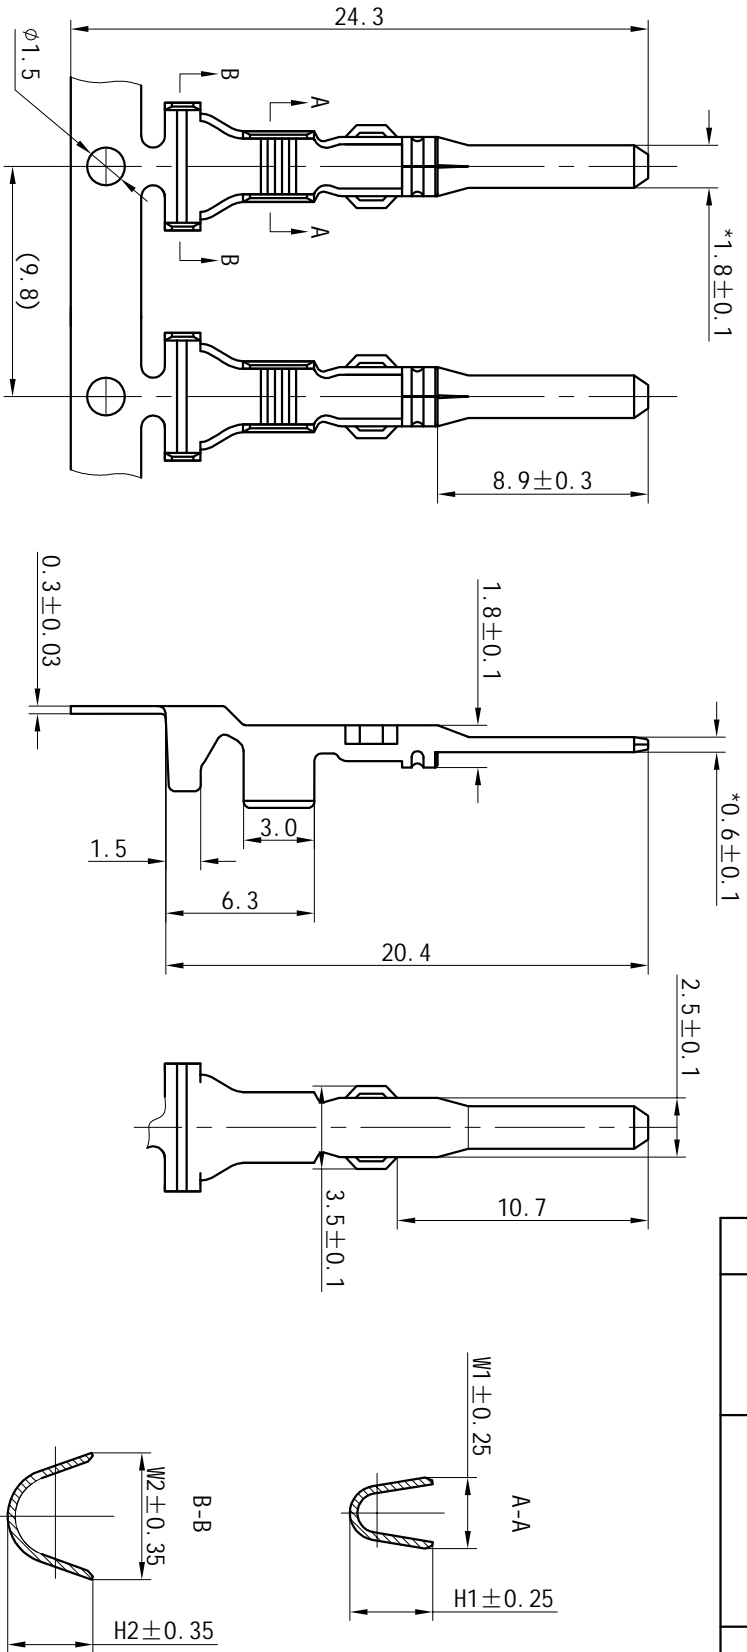

- Technical requirements:
1. Stamping surface are not allowed to have obvious scratch, crack, deformation, etc
 2. Clear stamping defects, chamfering, stamping feng is less than 0.02 mm
 3. No note fillet R for R0.2 to R0.5 mm
 4. Product embossing and stiffer depth of 0.08 to 0.1 mm
 5. "i" as the important features, "i" as the key features.
 6. Not note size tolerance of GB/T15055-2007 - m.

NO. TOLERANCES	GB/T15055-2007-m
DIM. RANGE	DIM. TOLERANCES
0.5~3	±0.20
>3~6	±0.30
>6~30	±0.40
>30~120	±0.50

NO.	PART NO.	W1	W2	H1	H2	WIRE RANGE (mm ²)
②	DJ613-1.8*0.6B	3.0	5.4	3.5	3.6	1.0-1.5
①	DJ613-1.8*0.6A	2.3	5.0	2.1	3.4	0.5-0.8

SURFACE TREATMENT	TIN-PLATED
MATERIAL	BRASS
NAME	TERMINAL
PART NO.	SEE TABLE
TYPE	
ARTICLE NO.	
MOULD NO.:	
REV.	1.0
1st-PERSON VIEW	
FREE UNIT	3:1
PAGE	1/1

乐清市奥海电气有限公司
Yueqing Aohai Electric Co., Ltd

DRAWN BY CONFIRMED BY APPROVED BY

1 2 3 4 5 6 7 8