

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 07/14/15'	~	



NOTES:

- MATERIAL
 - INSULATOR MATERIAL:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE:-40° to +105°C.
 - DIELECTRIC WITHSTANDING VOLTAGE:500V AC.
 - INSULATION RESISTANCE:1000MΩ min.
 - CURRENT RATING:3A.




3. PRODUCT NUMBER CODE:

DS1023-35 - X X X

- CONTACT PLATING
- 2: NICKEL + GOLD FLASH
- 8: FULL GOLD FLASH
- MOUNTING TYPE
- V: V/T TYPE
- No.OF CONTACTS
- 1*1-1*40
- 2*1-2*40

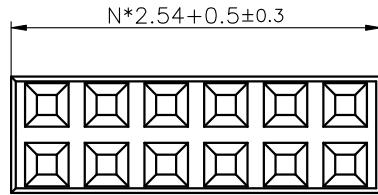

N=No.OF CONTACTS/2 2ROW
N=No.OF CONTACTS SINGLE ROW

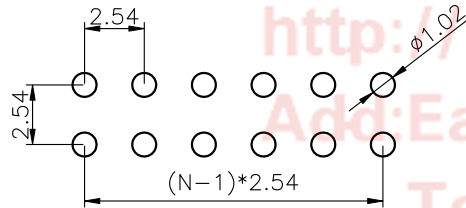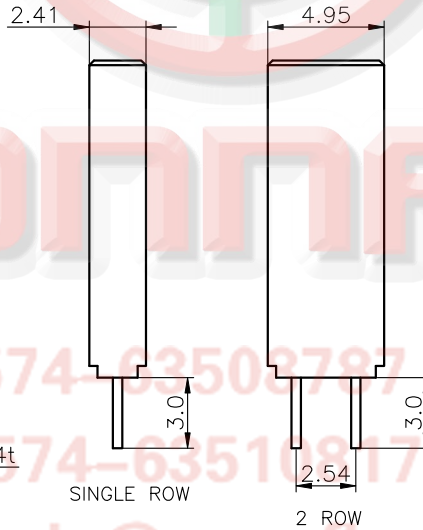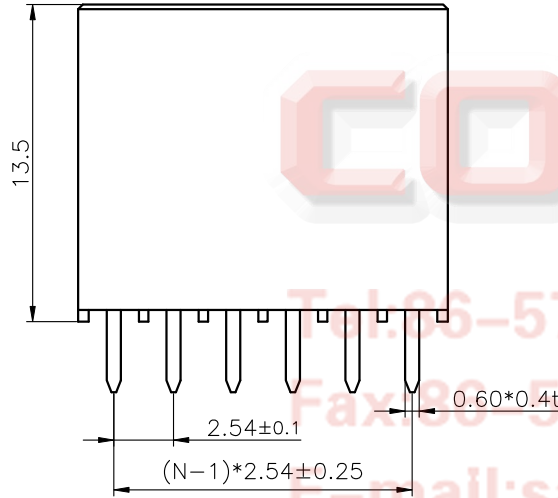

(TOLERANCE ±0.05)
RECOMMEND PCB LAYOUT

CONNFLY

Tel:86-574-63502797
Fax:86-574-63510817
E-mail:sale@connfly.com
http://www.connfly.com
Add:East Industry Zone KuangYan
Town Cixi Ningbo China
P.C.315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm FEMALE HEADER V/T TYPE	
X.	±0.60	X.	±5°	UNITS	mm	H=13.5mm		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1023-35 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1023-35-XXX-A						