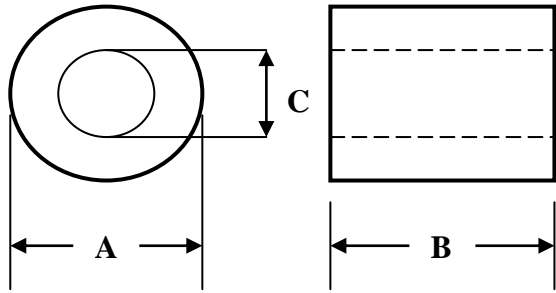


SPECIFICATION FOR APPROVAL

CUSTOMER :				DATE :	
PART NO : RH-17.5×28.5×9.5 (B8)				DWG.NO : SY2241176B29	
CUSTOMER PART NO :				CUST.DWG.NO :	
(1)DIMENSION(UNIT:mm) 				A	17.5 ± 0.5 m/m
				B	28.5 ± 0.7 m/m
				C	9.5 ± 0.3 m/m
				D	
				E	
				F	
				G	
				H	
				I	
				J	
(2)ELECTRICAL REQUIREMENTS				(3)SCHEMATIC	
Z	MIN 85 OHM	TEST FREQ	25 MHz		
Z	MIN 160 OHM	TEST FREQ	100 MHz		
Z	MIN OHM	TEST FREQ	MHz		
Z	MIN OHM	TEST FREQ	MHz		
(4)TEST INSTRUMENTS					
HP E4991A					
MATERIAL (ui)	800 ± 25%			APPROVED BY 吳載敏	
CORE	RH-17.5×28.5×9.5				
WIRE	φ 0.6 × 120mm			CHECKED BY 張明德	
WINDING	1 Ts			DRAWN BY LISA	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO : RH-17.5×28.5×9.5 (B8)				DWG.NO : SY2241176B29					
CUSTOMER PART NO :				CUST.DWG.NO :					
IMPEDANCE				DIMENSION (UNIT : mm)					
FREQ	25 MHz	100 MHz		A	B	C			
SPEC	MIN 85 OHM	MIN 160 OHM		17.5 ± 0.5	28.5 ± 0.7	9.5 ± 0.3			
1	106.7	205.3		17.66	28.38	9.37			
2	107.2	201.3		17.68	28.48	9.43			
3	105.3	202.6		17.52	28.12	9.26			
4	106.1	205.2		17.63	28.32	9.39			
5	106.7	204.5		17.72	28.46	9.45			
6	105.3	202.6		17.52	28.12	9.26			
7	106.7	205.3		17.66	28.38	9.37			
8	106.7	204.5		17.72	28.46	9.45			
9	107.2	201.3		17.68	28.48	9.43			
10	106.1	205.2		17.63	28.32	9.39			
\bar{X}	106.4	203.8		17.64	28.35	9.38			
R	1.9	4.0		0.20	0.36	0.19			
REMARK: 產品不能有明顯缺陷、污損；產品缺口長、寬在 1.7mm 以下， 深在 1.0mm 以下。							APPROVED BY 吳載敏		
							CHECKED BY 張明德		
							DRAWN BY LISA		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

RH-17.5×28.5×9.5 (B8)

